

# 103 series


## D-SUB I.D.C. TYPE

### Specifications:

Contact Resistance: 30m $\Omega$  max.at DC 100 mA  
Insulator Resistance: 1000M $\Omega$  min.at DC 500V  
Current Rating: 1AMP


### Dielectric Withstanding

Voltage: AC 500V For 1 minute  
Operating Temperature: -55° C--+105° C  
Contact: Male Brass  
Female Phosphor Bronze  
Housing: PBT &30% Glass Fiber(UL 94V-0)

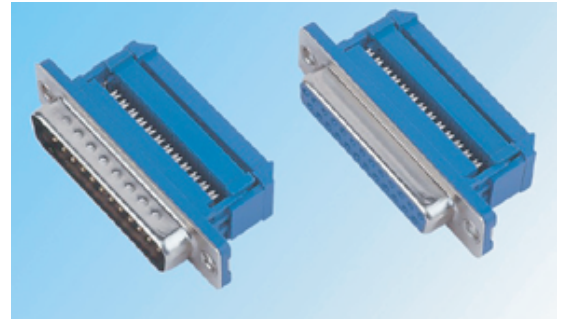


| Position | A     | B     | C     | D     | E     |
|----------|-------|-------|-------|-------|-------|
| 9        | 17.78 | 24.99 | 31.04 | 19.36 | 16.33 |
| 15       | 26.15 | 33.32 | 39.24 | 27.64 | 24.66 |
| 25       | 39.94 | 47.04 | 53.04 | 41.08 | 38.38 |
| 37       | 56.56 | 63.50 | 69.62 | 57.38 | 54.84 |

### [MALE]

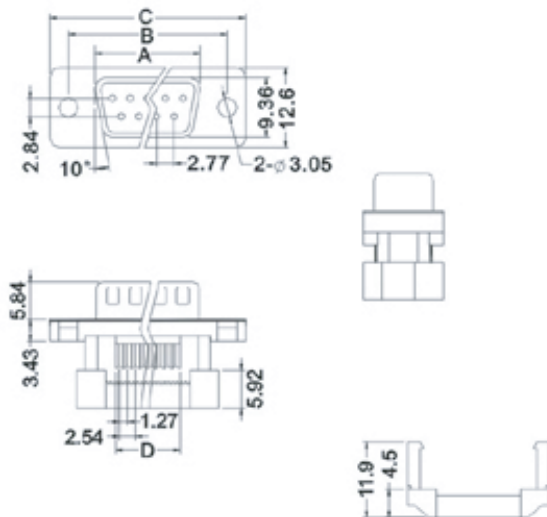

### [FEMALE]

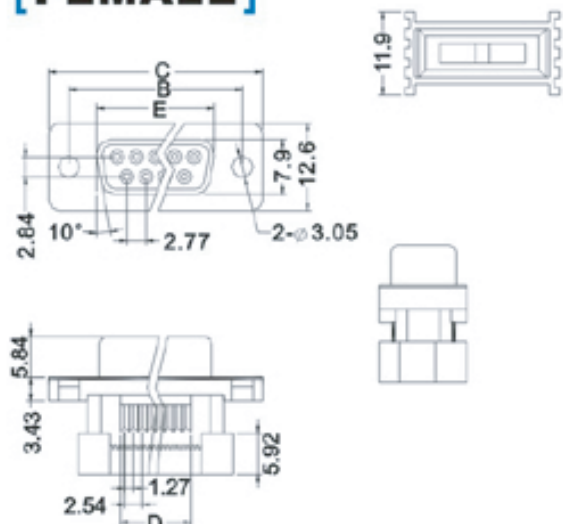

### How To Order

103 -09 P M B 1

