

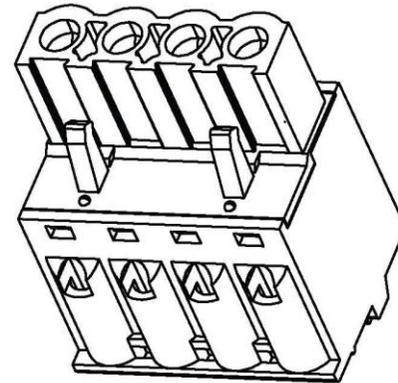
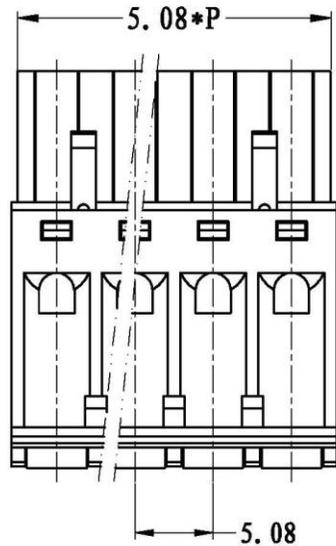


| REVISION RECORD | | | |
|-----------------|---------|------|--|
| REV. | CONTENT | MOD. | |
| △ | 新发行 | | |

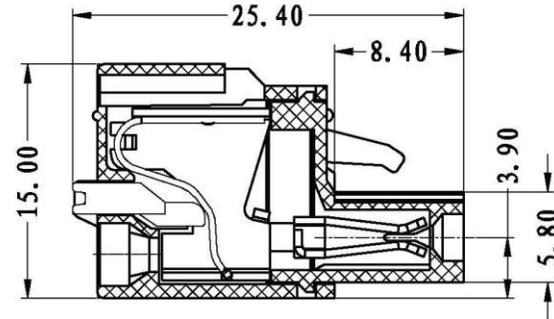

NOTES:
 Pitch : 5.08mm
 Rated Voltage : 300V
 Rated Current : 10A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range : 26~ 12AWG

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 10A
 耐压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃ ~ +105℃
 适用线规: 26~12AWG

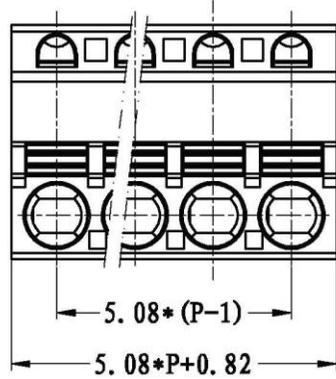

| | pitch dimension | | | Nominal dimension | | | | | — ◇ ○ |
|----------------|-----------------|-----------------|------------------|-------------------|------------------|-------------------|--------------------|----------|-------------|
| | over 0 to 6 | over 6 to 10 | over 10 to 24 | over 0 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 150 | over 150 | |
| variable range | 0 to 6 | 6 to 10 | 10 to 24 | 0 to 30 | 30 to 60 | 60 to 100 | 100 to 150 | 150 | |
| Tolerance | ±0.1 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 | 0.05/10 |

| 5 | LC6-5.08-盖子 | 1020COYXXAV | 1 | PA66-V0 | |
|------|--------------|--------------|------------|----------|---------------------|
| 4 | LC6-5.08-夹子 | 1020BO001AV | P | 磷青铜 | 镀镍 |
| 3 | LC6-5.08-弹片 | F2A0DLC608BV | P | 不锈钢 | |
| 2 | LC6-5.08-按钮 | 1020DOYXXAV | P | PA66-V0 | |
| 1 | LC6-5.08-主体 | 1020MOYXXAV | 1 | PA66-V0 | |
| NO. | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |
| DES. | ARKINE | DATE | 2011/03/08 | UNITS | MM |
| CHK. | | DATE | | SIZE | A4 |
| APP. | | DATE | | SCALE | 1:1 |
| | | | | DWG NO. | SP-1-1020002 |
| | | | | REV. | V0 |
| | | | | TITLE | LC6-5.08-XXP-1Y-00A |
| | | | | | LC6-5.08-成品 |

上海联捷电气有限公司
 Shanghai Blinker Electric C.O.,LTD