

D-Subminiature Connector High Density Solder Type

DHS Series

MALE


Specifications

Shell: Steel Zinc plated or Tin plated
 Insulator: Glass fiber PBT
 Current: 5 amp.
 No of Contact: 15, 26, 44, 62, 78, 108
 Dielectric Strength: 1000V for one minute
 Insulator Resistance: 1000MΩ Min. at 500V DC
 Temperature: -55°C ~ +105°C


FEMALE

Specifications


Shell: Steel Zinc plated or Tin plated
 Insulator: Glass fiber PBT
 Current: 5 amp.
 No of Contact: 15, 26, 44, 62, 78, 108
 Dielectric Strength: 1000V for one minute
 Insulator Resistance: 1000MΩ Min. at 500V DC
 Temperature: -55°C ~ +105°C

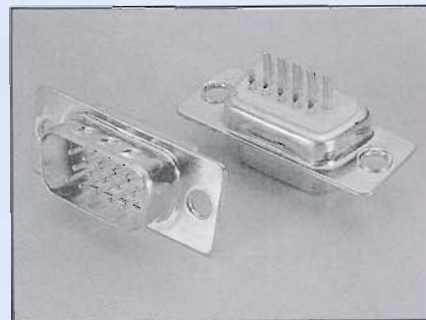

MALE

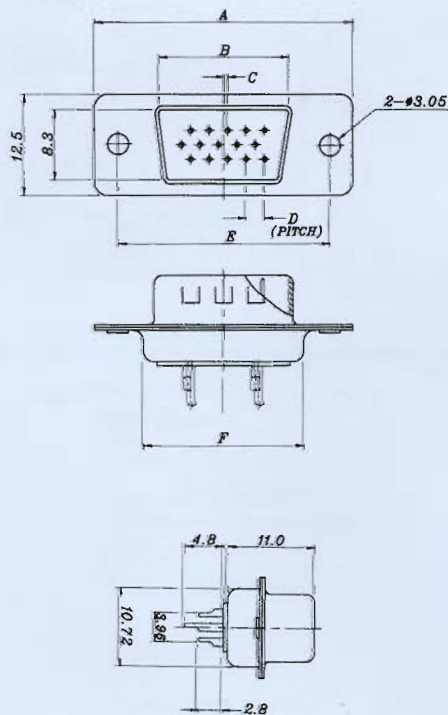

FEMALE

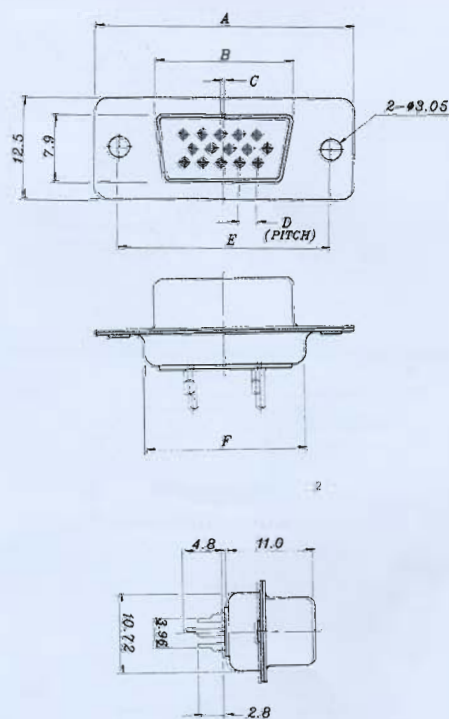

D-HS-P-(SERIES) DIMENSIONS

Position	A	B	C	D	E	F
DHS-15P	30.8	16.9	0.25	2.29	24.99	19.3
DHS-26P	39.1	25.3	0.51	2.29	33.32	27.5
DHS-44P	53.0	39.0	0.51	2.29	47.04	41.3
DHS-62P	69.3	55.4	0.58	2.41	63.50	57.7
DHS-78P	66.93	52.8			61.12	55.32

D-HS-S-(SERIES) DIMENSIONS

Position	A	B	C	D	E	F
DHS-15S	30.8	16.3	0.25	2.29	24.99	19.3
DHS-26S	39.1	24.7	0.51	2.29	33.32	27.5
DHS-44S	53.0	38.4	0.51	2.29	47.04	41.3
DHS-62S	69.3	54.8	0.58	2.41	63.50	57.7
DHS-78S	66.93	52.8			61.12	55.32