



TECHNICAL CRYSTAL LIMITED
德力高石英有限公司

Unit 750, Block F, Wah Lok Industrial Centre,
31-35 Shan Mei Street, Fotan, N.T., Hong Kong

香港新界火炭山尾街31-35號
華樂工業中心F座7樓50室

Tel: (852) 2688 2033

Fax: (852) 2688 2031

E-mail: tic@tecko.com

<http://www.tecko.com>

SPECIFICATION

MODEL: HDR433.92D(TO_{39.2})

1. SCOPE

This specification is applied to a SAW resonator designed for the stabilization of transmitters such as garage door openers and security transmitters.


2. ELECTRICAL SPECIFICATION

DC Voltage VDC	10V
AC Voltage Vpp	10V50Hz/60Hz
Operation temperature	-4°C to +85°C
Storage temperature	-45°C to +85°C
RF Power Dissipation	0dBm


Electronic Characteristics

Item	Unites	Minimum	Typical	Maximum
Center Frequency	MHz	433.820	433.920	434.020
Insertion Loss (in 50ohm system)	dB			15
50 Ω Loaded Q			7,000	
Spurious responseature (50 ohm)	dB			8
Turnover Temperature	°C	20	35	50
Drive current	mA			5
Input/Output Capacitance (at 1.0MHz)	pF	1.0	1.3	1.6

3. TEST CIRCUIT

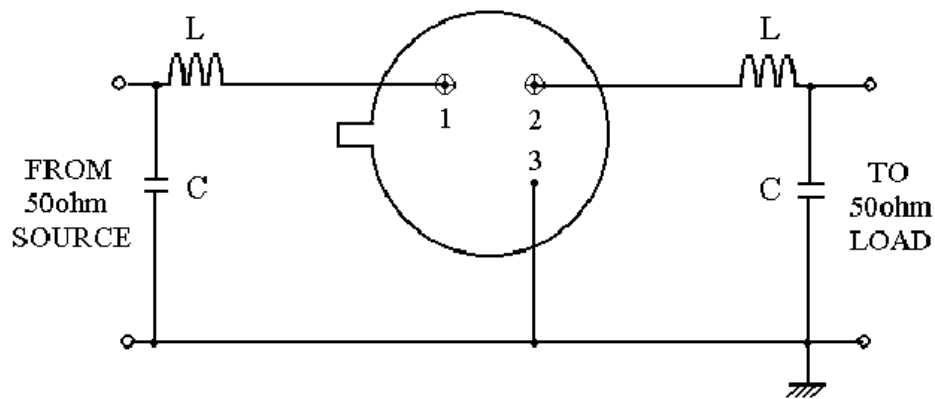

4. DIMENSION

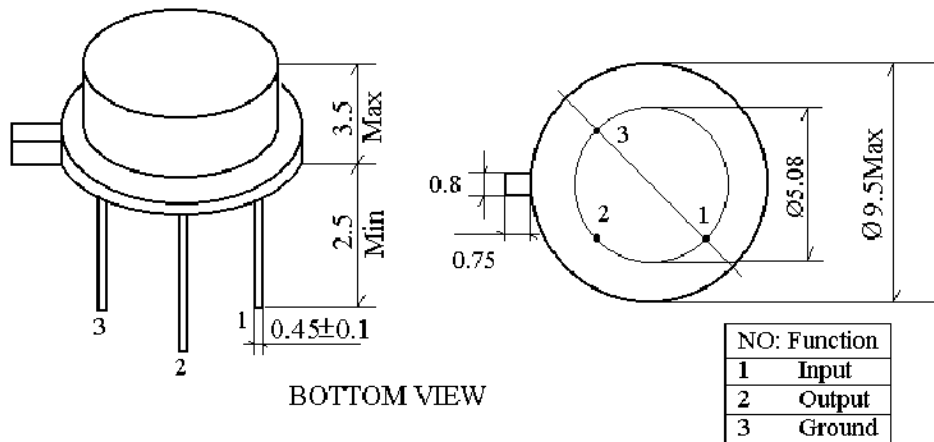

5. ENVIRONMENTAL CHARACTERISTICS

5-1 High temperature exposure

Subject the filter to $+80^{\circ}\text{C}$ for 96 hours. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications in table 1.

5-2 Moisture

Keep the filter at 40°C and 95% rh for 96 hours. then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications in table 1.

5-3 Low temperature exposure

Subject the filter to -20°C for 96 hours. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications in table 1.

5-4 Temperature cycling

Subject the filter to a low temperature of -55°C for 30 minutes. Following by a high temperature of $+85^{\circ}\text{C}$ for 30 Minutes. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall meet the specifications in table 1.

5-5 Resistance to solder heat

Dip the filter terminals no closer than 1.5mm into the solder bath at $27^{\circ}\text{C} \pm 10^{\circ}\text{C}$ for 10 ± 1 sec. Then release the Filter into the room conditions for 1 to 2 hours. The Filter shall meet the specifications in table 1.

5-6 Mechanical shock

Drop the filter randomly onto the concrete floor from the height of 30cm 3 times. The filter shall fulfill the specifications in table 1.

5-7 Vibration

Subject the filter to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The filter shall fulfill the specifications in table 1.

5-8 Lead fatigue

6-8-1 Pulling test

Weight along with the direction of lead without an shock 3 kg. The filter shall satisfy all the initial Characteristics.

6-8-2 Bending test

Lead shall be subject to withstand against 90°C bending in the direction of thickness. This operation shall be done toward both directions. The filter shall show no evidence of damage and shall satisfy all the initial electrical characteristics.

6. REMARK

6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

6.3 Soldering

Only leads of component may be solded. Please avoid soldering another part of component.