

REVISION RECORD				
REV	ECN	DESCRIPTION	DRAFT	DATE

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M2 , 1.77Lb.in
- 4.Wire range : 28~16AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A







- 2.Torque value : M2 , 0.2N·m
- 3.Wire range : 0.5~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=02~24P
- 3.Stripping length : 6~7mm
- 4.Operating temperature : -40℃~+105℃
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	Over	Over	Over	Over	Over
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
10	24	30	60	100	150
±0.15±0.20±0.30±0.50±0.70±1.00±1.30 ±2°					

6.RoHS Compliance

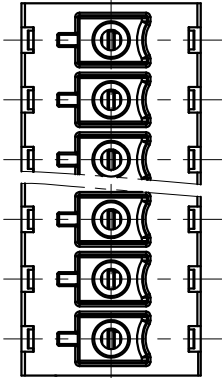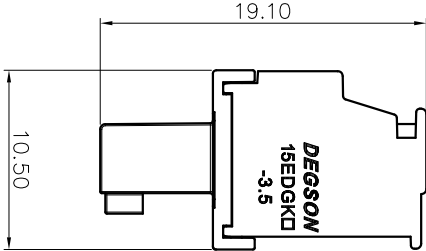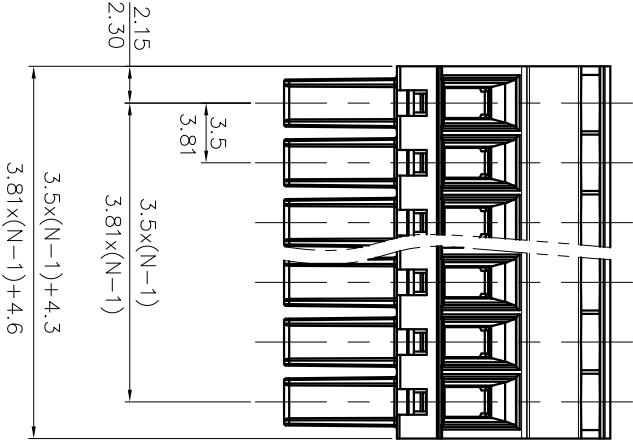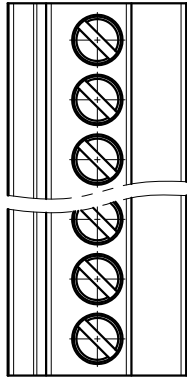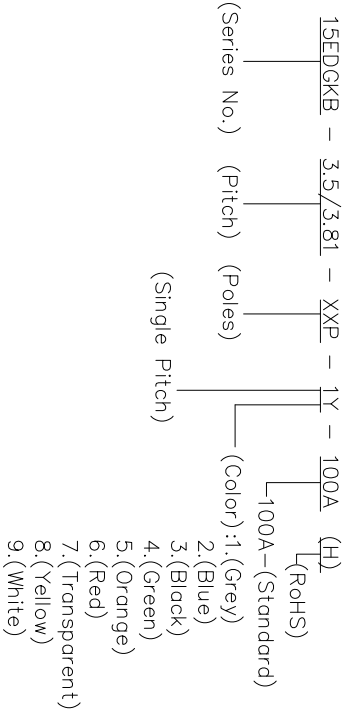

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
MODEL:	15EDGKB-3.5/3.81-XXP-1Y-100A(H)
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
SCALE	1:1