



*SPECIFICATION FOR LED LAMP*

*PART NO. : LT1873-83-UR-D37*

*T-1 3/4 (5mm) ROUND TYPE*

Approved by:\_\_\_\_\_ Prepared by:\_\_\_\_\_

*LEDTECH ELECTRONICS CORPORATION*

5TH FL,NO.542-5,CHUNG CHENG ROAD,  
HSIN-TIEN CITY,TAIWAN.

TEL : 886-2-22186891

FAX : 886-2-22181222,22182894





## T-1 3/4 (5mm) ROUND TYPE

**PART NO. : LT1873-83-UR-D37**

Page : 2/4

### Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	72	mW
Reverse Voltage	Vr	4	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle,0.1ms pulse width)	If (Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Lead Soldering Temp. (1.6mm from body) for 5 seconds		260	°C


### Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=20mA	1000	1700		mcd
Forward Voltage	Vf	If=20mA		2.1	2.4	V
Peak Wavelength	$\lambda p$	If=20mA		660		nm
Dominant Wavelength	$\lambda d$	If=20mA		638		nm
Reverse Current	Ir	Vr=4V			100	$\mu A$
Viewing Angle	$2\theta 1/2$	If=20mA		13		deg
Spectrum Line Halfwidth	$\Delta \lambda$	If=20mA		20		nm




**T-1 3/4 (5mm) ROUND TYPE**  
**PART NO. : LT1873-83-UR-D37**


**Typical Electrical / Optical Characteristics Curves :**

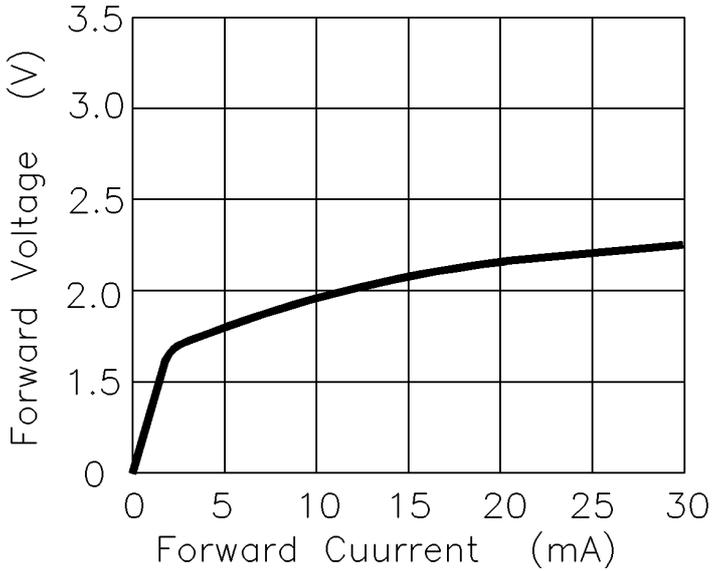


**Forward Current vs. Forward Voltage**

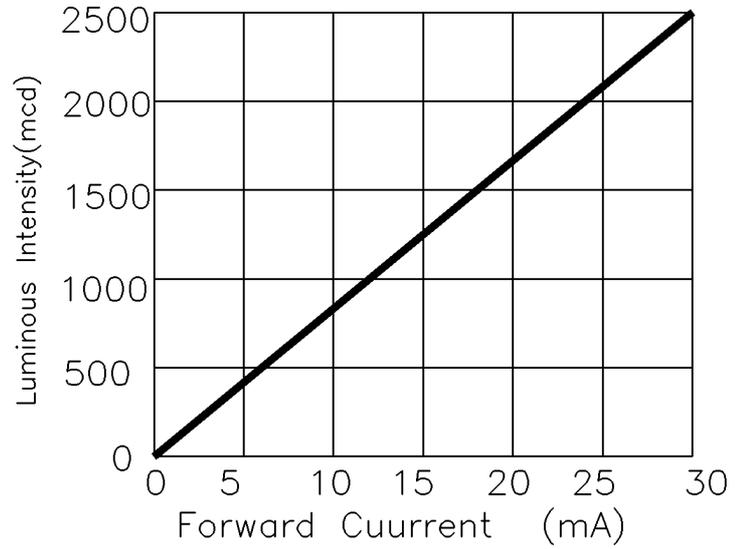

**Forward Current vs. Luminous Intensity**

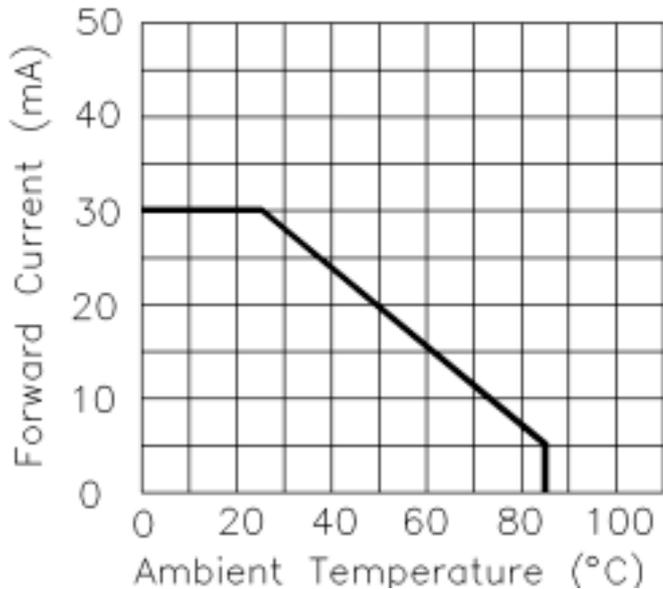

**Ambient Temperature vs. Forward Current**

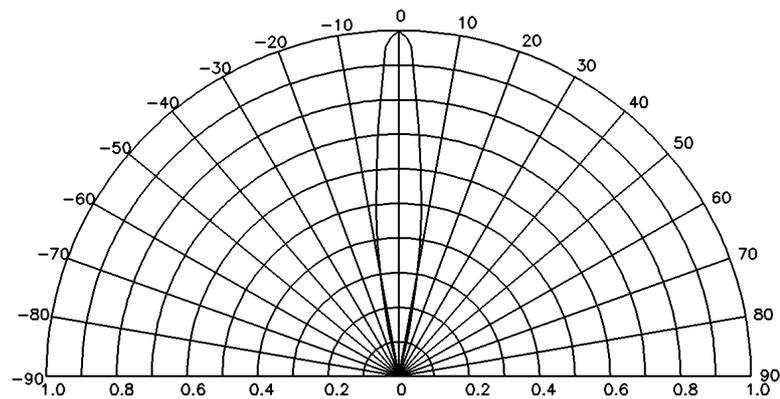

**Radiation Diagram**



## T-1 3/4 (5mm) ROUND TYPE

**PART NO. : LT1873-83-UR-D37**

Page : 4/4

### Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25°C	168 hrs
Storage at High Temperature	Ta=100°C	168 hrs
Storage at Low Temperature	Ta=-40°C	168 hrs
Storage at High Temperature/High Humidity	Ta=85°C / RH=85%	168 hrs
Operating at High Temperature	Ta=85°C / If=20mA	168 hrs
Operating at Low Temperature	Ta=-25°C / If=20mA	168 hrs
Thermal Shock	Ta/T=100°C/30min~ - 40°C/30min	10 cycles
Solderability	Tsol=260°C	5 sec

### Criteria for Judging The Damage :

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	---	Initial Data x1.1
Reverse Current	Ir	Vr=4V	---	100 $\mu$ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	---