



# HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: info@hahn-trafo.de




## Data sheet: BV EI 305 2056

Size 5 a: height 29.8 mm	3,0 VA	ta 40/F	BV EI 305 ...
--------------------------	--------	---------	---------------

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

<p>absolutely short-circuit-proof</p> <p><b>minimal size</b></p> <p>test certifications to ENEC 10-, VDE, UL- and CSA-regulations</p> <p><b>vaccum encapsulated, bobbin with dual chamber windings</b></p> <p>temperature class ta 40°C/F and ta 70°C/F</p> <p><b>high electrical safety and long service-life properties</b></p> <p>individually tested with certificate</p> <p><b>excellent temperature fluctuation resistance properties</b></p> <p>self-extinguishing cast housing and sealing material</p>	
---	--

Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 305 2056	3,0	230	1-5	2x9 V 167 mA	6-7/9-10	15,9/15,9

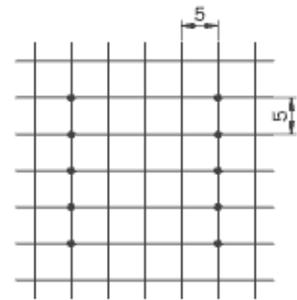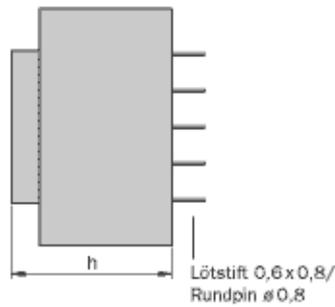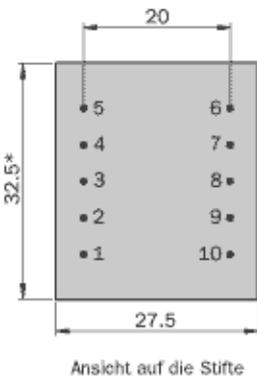

Maße ohne Toleranzangabe ± 0,3 mm, Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.