
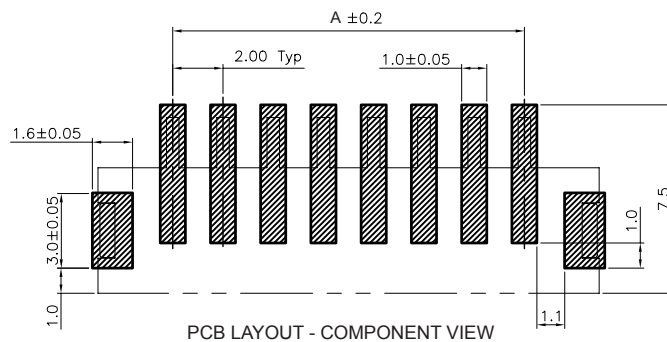

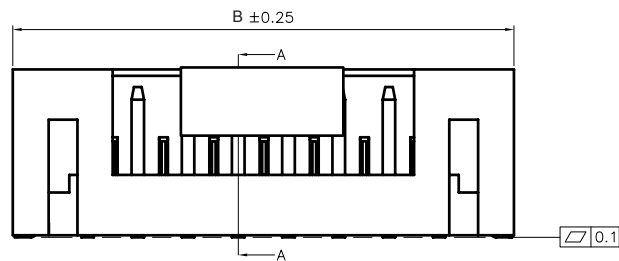



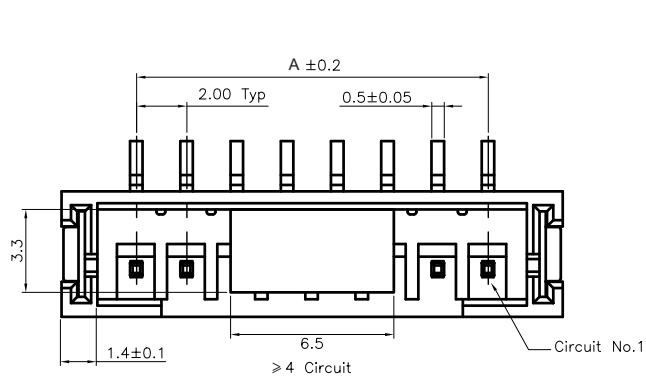

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: NYLON 9T
FLAMABILITY RATING: UL94-V0
COLOR: BEIGE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.00MM

ENVIRONMENTAL

OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 2A
WORKING VOLTAGE: 125V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING

REFLOW PROCESS

PACKAGING

TAPE AND REEL

DIMENSION

A = 2.00 x (NB PIN - 1)
B = 2.00 x (NB PIN - 1) + 5.90

				PCB LAYOUT - COMPONENT VIEW				
G				PROJECTION:	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15			
F								
E								
D								
C	28-JAN-09	B DIMENSION	JP	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 2.00 SMT MALE VERTICAL SHROUDED HEADER		SIZE A4
B	07-NOV-08	DIMENSION B	CH		SCALE:			
A	23-JUN-08	PDF	CH		SHEET: 1/2	WERI PART NO: 6203 xx 124022		
REV	DATE	FILE	BY		DRAW:			

