


CEMENT FIXED RESISTORS

- SQP (STANDARD TYPE)
- SQM (RADIAL TYPE)
- SQZ (PCB MOUNTING TYPE)
- SQH SQS (CLAMP MOUNTUNG TYPE)

● FEATURES

- ⊙ Heat and flame resistant!
- ⊙ Completely insulated character suitable for printed circuit board.
- ⊙ For high resistance value, the winding core will be replaced by metal oxide film cutting core.
- ⊙ Non-inductive type are available on request!



SQP

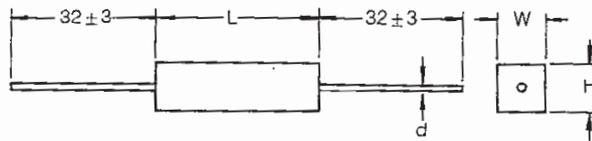

SQP	DIMENSIONS(mm)				Resistance Range(Ω)		Max Working Voltage
	L±0.5	W±0.5	H±0.5	d±0.03	SQP	MO+SQP	
2W	18.0	7.0	7.0	0.65	0.1Ω~50Ω	50~20KΩ	250V
3W	22.0	8.0	8.0	0.8	0.1Ω~50Ω	50~33KΩ	350V
5W	22.0	9.5	9.0	0.8	0.1Ω~50Ω	50~50KΩ	350V
7W	35.0	9.5	9.0	0.8	0.1Ω~500Ω	500~50KΩ	500V
10W	48.0	9.5	9.0	0.8	0.1Ω~500Ω	500~50KΩ	750V
15W	48.0	12.5	12.0	0.9	0.1Ω~500Ω	500~150KΩ	1000V
20W	60.0	14.0	13.0	0.9	0.1Ω~500Ω	500~150KΩ	1000V

SQM

SQT

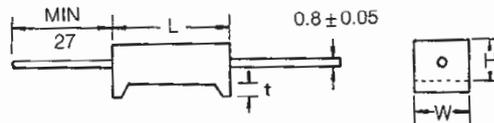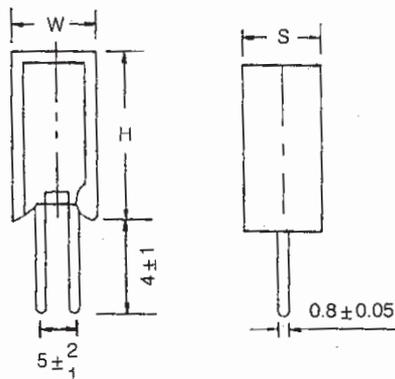

Type	Dimension(mm)			Resistance Range(Ω)		Type	Dimension(mm)				Resistance Range(Ω)	
	H±1.5	W±1	S±1	SQM	MO+SQM		SQT	W±1	H±1	L±1.5	1±0.5	SQT
5W	25	13	9	0.1-50Ω	50-50KΩ	5W	10	9	22	1.5	0.1-50Ω	50-50KΩ
7W	39	13	9	0.1-500Ω	500-47KΩ	7W	10	9	35	3.0	0.1-500Ω	500-47KΩ
10W	51	13	9	0.1-500Ω	500-47KΩ	10W	10	9	48	3.0	0.1-500Ω	500-47KΩ