




Dual Common-Cathode Schottky Rectifiers

High Barrier Technology for improved high temperature performance

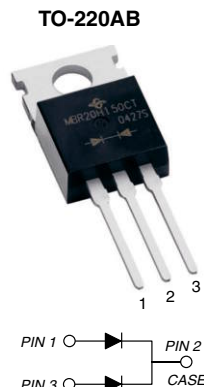

FEATURES

- Guardring for overvoltage protection
- Low power losses, high efficiency
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High frequency operation
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

For use in low voltage, high frequency rectifier of switching mode power supplies, free-wheeling diodes, dc-to-dc converters or polarity protection application.

MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	20 A x 2
V_{RRM}	35 V to 60 V
I_{FSM}	350 A, 320 A
V_F at $I_F = 20$ A	0.55 V, 0.60 V
I_R	100 μ A
T_J max	175 °C

MECHANICAL DATA

Case: TO-220AB

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

Mounting Torque: 10 in-lbs maximum**Polarity:** As marked

MAXIMUM RATINGS ($T_C = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	MBR40H35CT	MBR40H45CT	MBR40H50CT	MBR40H60CT	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	V
Maximum average forward rectified current (see Fig. 1)	I _{F(AV)}	40 20				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	350		320		A
Peak repetitive reverse current per diode at t _p = 2 μs, 1 kHz	I _{RRM}	1.0				A
Peak non-repetitive reverse surge energy (8/20 μs waveform)	E _{RSM}	20				mJ
Non-repetitive avalanche energy at 25 °C, I _{AS} = 3.0 A, L = 5 mH	E _{AS}	22.5				mJ
Voltage rate of change (rated V _R)	dv/dt	10000				V/μs
Operating junction and storage temperature range	T _J , T _{STG}	- 65 to + 175				°C

MBR40H35CT thru MBR40H60CT

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)							
PARAMETER	TEST CONDITIONS	SYMBOL	MBR40H35CT	MBR40H40CT	MBR40H50CT	MBR40H60CT	UNIT
Maximum instantaneous forward voltage per diode (1)	at $I_F = 20\text{ A}$ $T_J = 25\text{ }^{\circ}\text{C}$	V_F	0.64		0.68		V
	at $I_F = 20\text{ A}$ $T_J = 125\text{ }^{\circ}\text{C}$		0.55		0.60		
	at $I_F = 40\text{ A}$ $T_J = 25\text{ }^{\circ}\text{C}$		0.76		0.83		
	at $I_F = 40\text{ A}$ $T_J = 125\text{ }^{\circ}\text{C}$		0.70		0.73		
Maximum instantaneous reverse current per diode (1)	at rated V_R $T_J = 25\text{ }^{\circ}\text{C}$	I_R		100			μA
	$T_J = 125\text{ }^{\circ}\text{C}$			15			
Typical junction capacitance	at 4.0 V, 1 MHz per diode	C_J	1200		920		pF

Note:(1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS (T _C = 25 °C unless otherwise noted)						
PARAMETER	SYMBOL	MBR40H35CT	MBR40H40CT	MBR40H50CT	MBR40H60CT	UNIT
Thermal resistance from junction to case per diode	R _{θJC}	1.8				°C/W

ORDERING INFORMATION (Example)					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AB	MBR40H45CT-E3/45	1.58	45	50/Tube	Tube

RATINGS AND CHARACTERISTICS CURVES

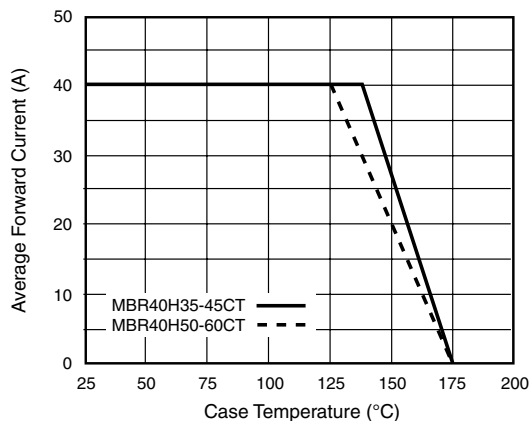
($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Figure 1. Forward Derating Curve Per Diode

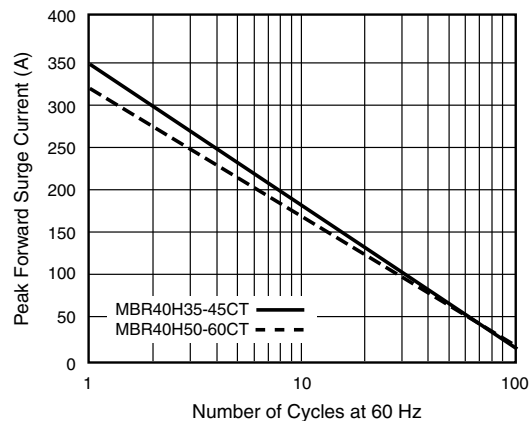


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Diode



New Product

MBR40H35CT thru MBR40H60CT

Vishay General Semiconductor

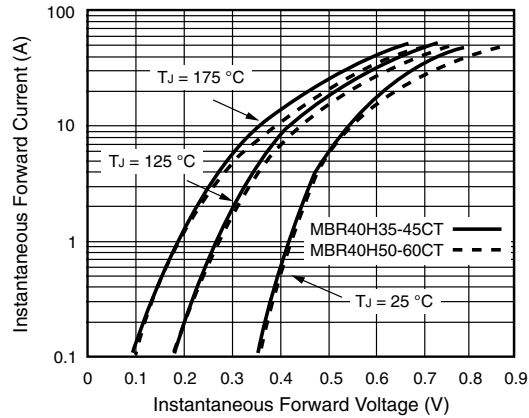


Figure 3. Typical Instantaneous Forward Characteristics Per Diode

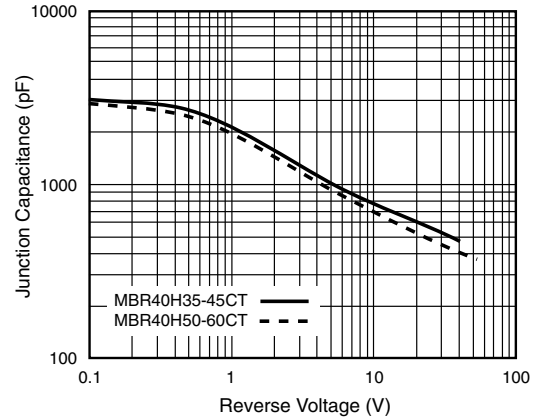


Figure 5. Typical Junction Capacitance Per Diode

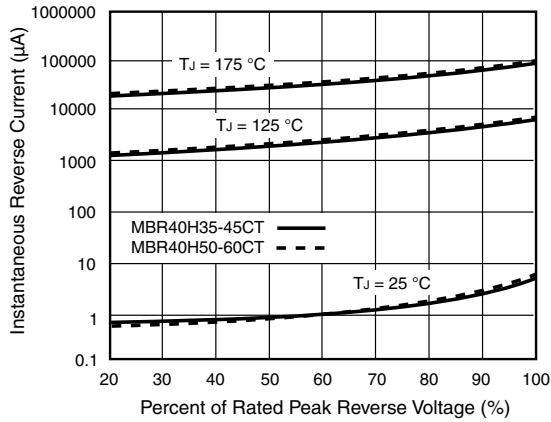


Figure 4. Typical Reverse Characteristics Per Diode


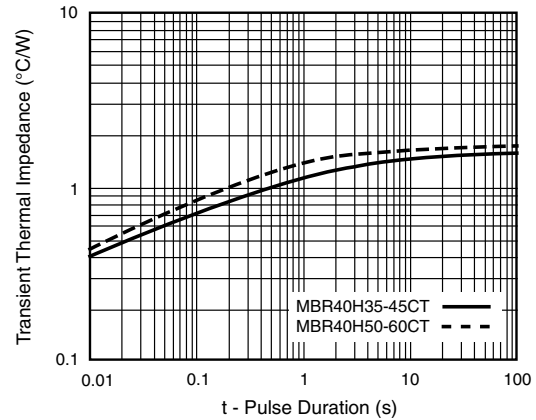


Figure 6. Typical Transient Thermal Impedance Per Diode

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



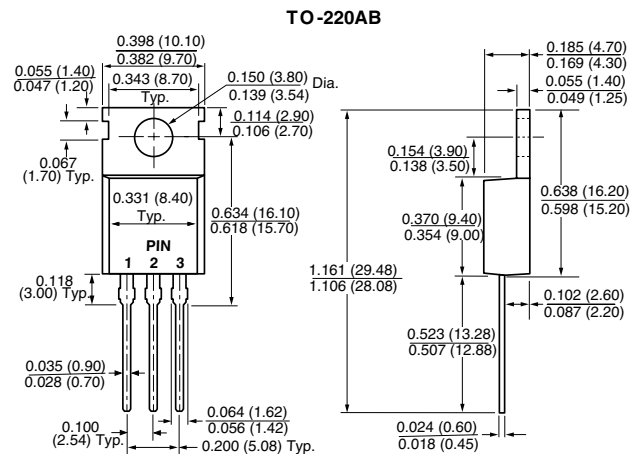

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.