

Series 780

SPECIFICATIONS


技術資料

Socket Strip


Pitch 2.54mm, Height 5.7mm Straight & Right

(Single & Double Row)

780-102-70



780-081-60



MATERIAL

- **Contact:** Phosphor Bronze
- **Plating:** Gold Flash
- **Insulator body:** (Black) Glass Filled Polyester (UL 94 V-0)

ELECTRICAL



- **Current Rating:** 3Amp. / contact max.
- **Contact Resistance:** $\leq 20\text{m}\Omega$ / contact
- **Insulation Resistance:** $\geq 100\text{m}\Omega$
- **Operating Voltage:** 60V
- **Dielectric Withstanding Voltage:** AC 1000V Per minute

MECHANICAL

- **Average Insertion Force:** 0.8N
- **Average withdrawal Force:** 0.8N
- **Mechanical Life Cycle:** Min. 100
- **Operating temperature:** -40°C to $+105^{\circ}\text{C}$ / -40°F to $+221^{\circ}\text{F}$
- **Soldering Temperature:** $+260^{\circ}\text{C}$, 10sec. / $+500^{\circ}\text{F}$, 10sec.

STRAIGHT PIN, SINGLE ROW



Pin Style 60

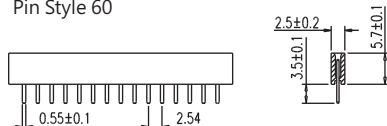

Straight Pin, Single Row

RIGHT ANGLE, SINGLE ROW



Pin Style 70

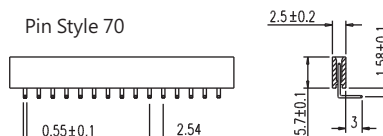

Right Angle, Single Row

STRAIGHT PIN, DOUBLE ROW



Pin Style 60

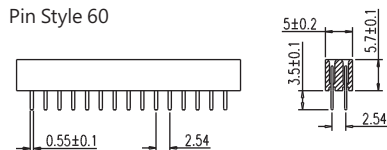

Straight Pin, Double Row

RIGHT ANGLE, DOUBLE ROW

Pin Style 70

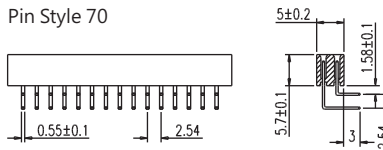

Right Angle, Double Row

HOW TO ORDER 排序整理

