



Pin Header/ Board Spacer For Customer Made Item

Technical Data

Material

- *Contact : Phosphor bronze or brass
- *Surface of contact : Gold or tin selected gold plating
- *Insulator : (black) Glass filled polyester (UL 94 V-O)


Electrical

- *Current rating : 4 Amp continous
- *Contact resistance : $\leq 15m\Omega$
- *Insulation resistance : $\geq 5000M\Omega$
- *Withstanding voltage : 1000 VRMS


Mechanical

- *Retention force : > 2kg per pin
- *Operating temperature : -60°C to +125°C

(Please fill in the dimensions and Fax return for quotation and samples)

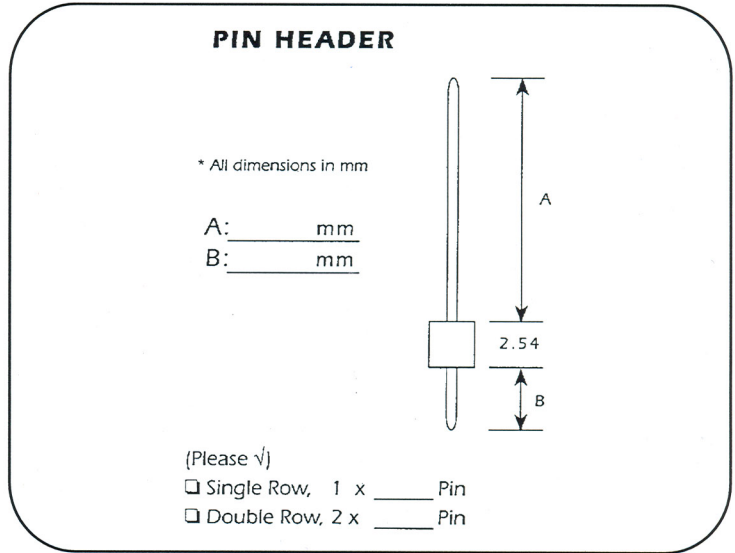

Quote Quantity : _____
Sample : _____

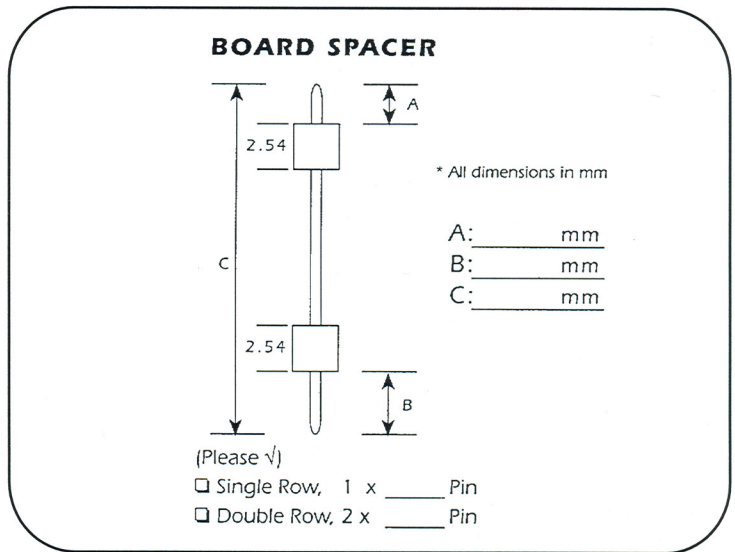

Quote Quantity : _____
Sample : _____

HOW TO ORDER

7
5
0
-
X
X
X
-
1
X
-
0
0

Series No.

No. of Pin
Per Row
1 - 40 Pin

1	Single
2	Double

1

Straight only

1	Gold Flash
2	10u Gold Plated

Factory
Code

* All specification change without prior notice