

G6491 = Product group; Product group discount G 64 9_

Rocker Switches Housing Cut-out: 13x19mm

Construction

- For housing cut-out 13x19mm
- Switching mode: 1 x On/Off
- Terminals: connector 4,8x0,8mm

Technical Specifications

Switching Voltage:250V AC
 Switching Current
 At Resistance Load:10A
 At Inductive Load:4A
 Ambient Temperature, Max.:+85°C
 Contact Opening Width:3mm
 Weight, Approx.:4g

Approvals



Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various

Part Nr.	Part description	PU	10 up.	50 up.	200 up.
WS7211	Rocker Switch SPST 10A 250V Black/Black	E	0,74	0,56	0,47



WS7211

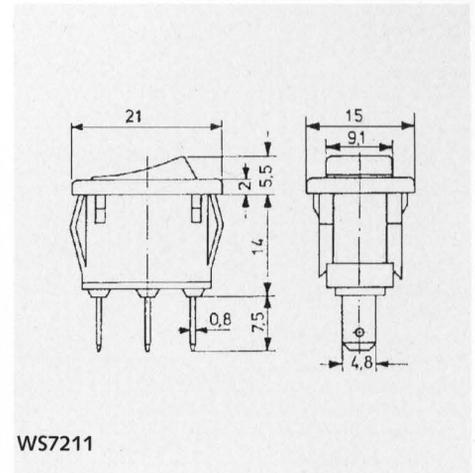

WS7211

G6492 = Product group; Product group discount G 64 9_

Rocker Switches for Panel Mounting, Round Cut-out

Version

DS60KON: Rocker Marking On/Off
 DS60KLR: On/Off with Red LED

Technical Specifications

Switching Capacity:125V AC/5A
 Contact Resistance (2,5V DC, 1A):<20mΩ
 Insulation Resistance (500V DC):≥100MΩ
 Dielectric Strength (1 Min.):1500V AC, 50/60Hz

LED-Specifications and Electrooptical Data

Colour	P ¹⁾ [mW]	I _e ¹⁾ [mA]	U _r ¹⁾ [V]	T ¹⁾ [°C]	U _F [V]	I _r [μA]	I _v ²⁾ [mcd]	λ _P [nm]	D _λ [nm]
Red	80	40	4	-30...+85	1,7	100	8	660	30
Yellow	100	40	4	-30...+85	2,1	100	8	570	30
Green	100	40	4	-30...+85	2,1	100	4	555	30

¹⁾ = Absolute Maximum Value, ²⁾ = Typical Value, Absolute Minimum Value 50% of Given Size, Articles in stock in bold print, other articles of 500 pieces available on request, delivery time: 14 weeks

Assembly

Chassis Cut-out
 Material Strength:1,0...2,5mm
 Holes Ø:20,4mm
 Mounting Depth:13,5mm

Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: MIYAMA ELECTRIC
<http://www.miyama.co.jp>

Part Nr.	Part description	PU	10 up.	50 up.	200 up.
DS60KON	Rocker Switch 3A 250V On/Off	E	1,35	1,07	0,93
DS60KLR	Rocker Switch 3A 250V LED Red	E	2,49	1,97	1,71




DS60KON

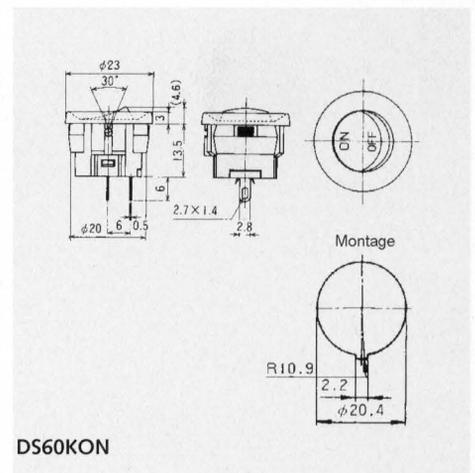

DS60KON



DS60KLR

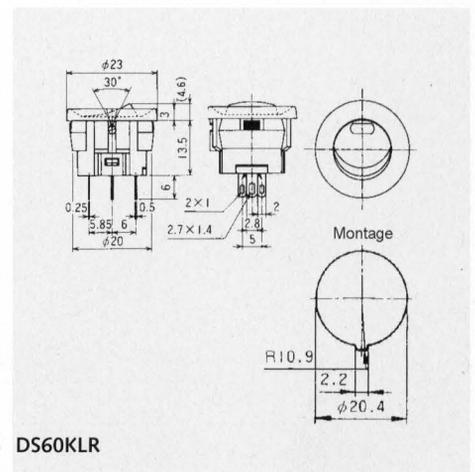

DS60KLR