



RS232 D CONNECTOR COVER



DP TYPE

PLASTIC
DP-9C
DP-15C
DP-19C
DP-23C
DP-25C
DP-37C
DP-50C



DN TYPE

CHROMATE PLATED
DN-9C
DN-15C
DN-19C
DN-23C
DN-25C
DN-37C
DN-50C




DPT TYPE

PLASTIC THUMB SCREW
DPT-9C
DPT-15C
DPT-25C
DPT-37C
DPT-50C




DNT TYPE

CHROMATE PLATED THUMB SCREW
DNT-9C
DNT-15C
DNT-25C
DNT-37C
DNT-50C




DD TYPE

PLASTIC
DD-9C
DD-15C
DD-19C
DD-23C
DD-25C
DD-37C
DD-50C



DDN TYPE

CHROMATE PLATED
DDN-9C
DDN-15C
DDN-19C
DDN-23C
DDN-25C
DDN-37C
DDN-50C



DDT TYPE

PLASTIC THUMB SCREW
DDT-9C
DDT-15C
DDT-19C
DDT-23C
DDT-25C
DDT-37C
DDT-50C



DDN TYPE

CHROMATE PLATED THUMB
SCREW TYPE
DDN-9CT
DDN-15CT
DDN-19CT
DDN-23CT
DDN-25CT
DDN-37CT
DDN-50CT

RS232 D CONNECTOR COVER

DBT TYPE



PLASTIC THUMB SCREW
DBT-9C
DBT-15C
DBT-25C
DBT-37C
DBT-50C


V TYPE



METAL COVER (ZINC ALLOY)
DV-9C
DV-15C
DV-25C
DV-37C
DV-50C




DP TYPE
GUER WITH PLASTIC SCREW
DP-9C/S
DP-15C/S
DP-25C/S
DP-37C/S
DP-50C/S

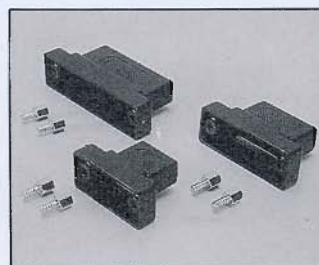

DF TYPE
FOR FLAT CABLE COVER
DF-9C
DF-15C
DF-25C

DPF TYPE

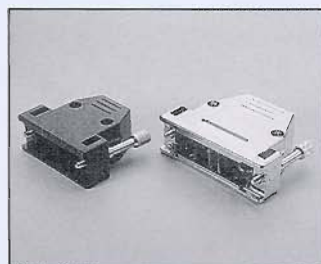


PLASTIC THUMB SCREW
DPF-25C
DPF-37C
DPF-50C

U TYPE



METAL COVER (ZINC ALLOY)
DM-9C
DM-15C
DM-25C
DM-37C
DM-50C

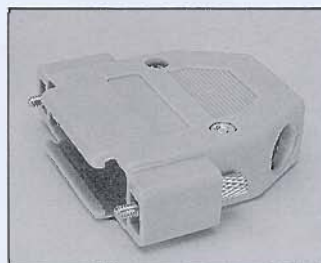

DP TYPE
PLASTIC THUMB SCREW 45°
ENTER COVER
DP-9CR
DP-25CR


PLASTIC SNAP TYPE COVER




DP-9C B
DP-25CB
DP-36CB

GENDER CHANGE COVER


GC-9G
GC-9C




GC-9/25G
GC-9/25C




GC-15G
GC-15C



GC-25/36G
GC-25/36C




GC-25G
GC-25C



GC-36/36G
GC-36/36C



GC-25MG
GC-25MC




DP-25CA




G: GRAY
C: CHROMATE PLATED

RS232 D CONNECTOR COVER DIMENSIONS


**B. DP TYPE
9 PIN**

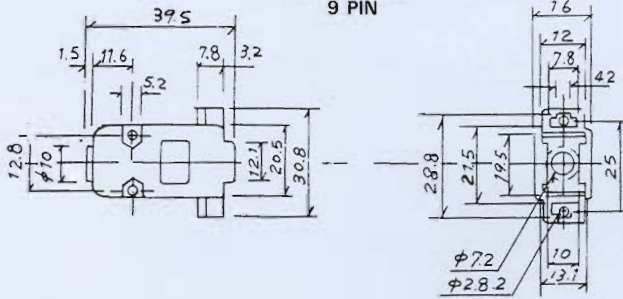


**DP TYPE
19 PIN**

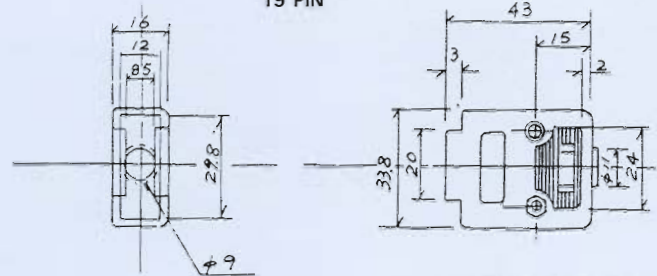


**B. DP TYPE
15 PIN**

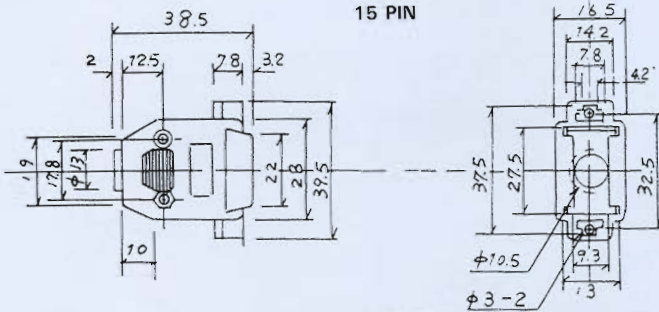


**B. DP TYPE
25 PIN**

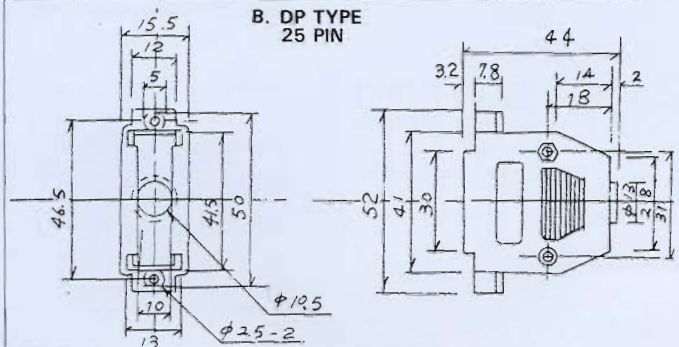


**METAL COVER
25 PIN**

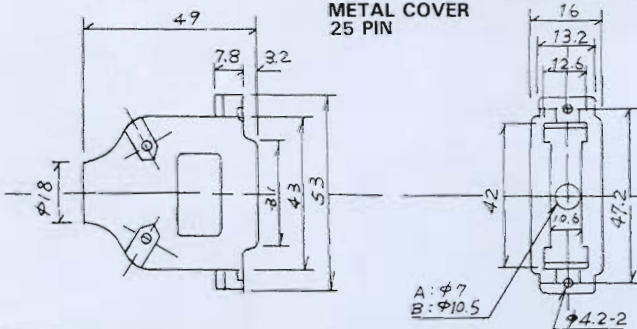


**DD TYPE
25 PIN**

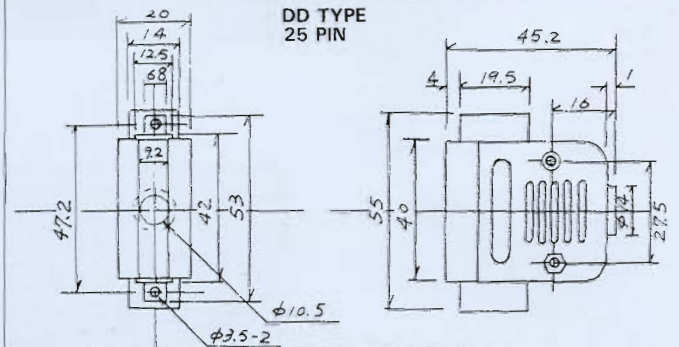


**GENDER
CHANGER**

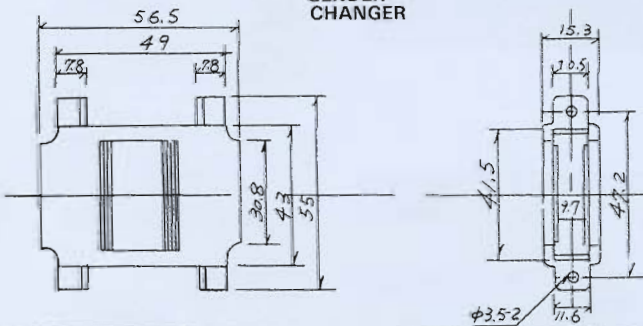

MINI-TESTER

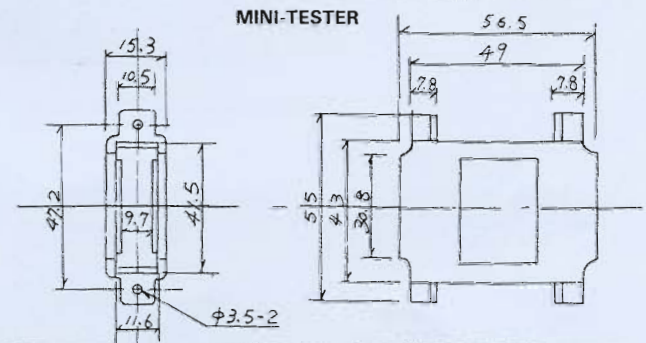

**DP TYPE
37 PIN**

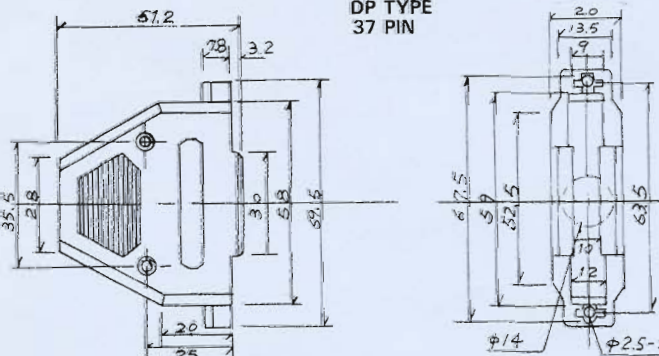

**DD TYPE
50 PIN**

