

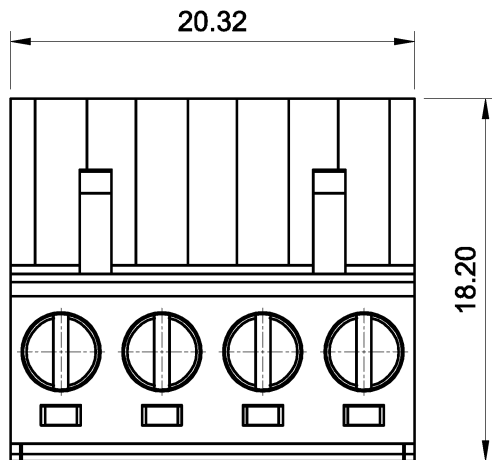


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
1	初版发行		

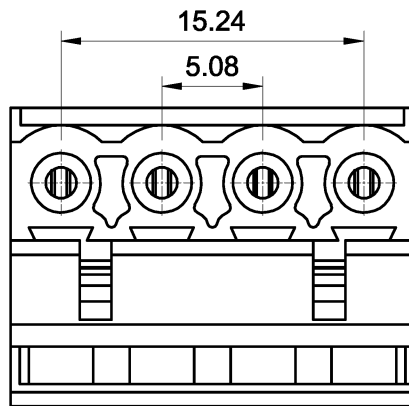

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: $5M\Omega$ or more at DC500V
5. Using Temperature Range: $-40^{\circ}C - +105^{\circ}C$
6. Suitable Electric Wire: 28-12AWG
7. Screw Torque Value: 0.5 N.m

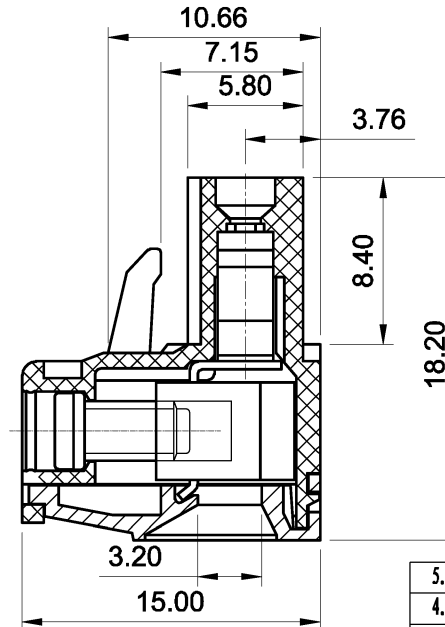

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.08mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗5兆欧
5. 使用条件: $-40^{\circ}C - +105^{\circ}C$
6. 适用线规: 28-12AWG
7. 螺丝扭力: 0.5 N.m

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150 to 200	0.05/10
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LC1-5.08-夹子		1001B0001AV		4	磷青铜	镀镍
4.	LC1-5.08-铜方块		F1A0BLC5083V		4	黄铜	镀镍
3.	LC1-5.08-螺丝		SP0YA305302V		4	碳钢	三价铬钝化彩锌
2.	LC1-5.08-盖子		1001C4004AV		1	PA66-V0	绿色
1.	LC1-5.08-主体		1001A4004AV		1	PA66-V0	绿色
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	18-05-09	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO. SP-1-10010A01	REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric C.O.,LTD						TITLE	LC1-5.08-4P-140-00A
							LC1-5.08-成品