


原理图

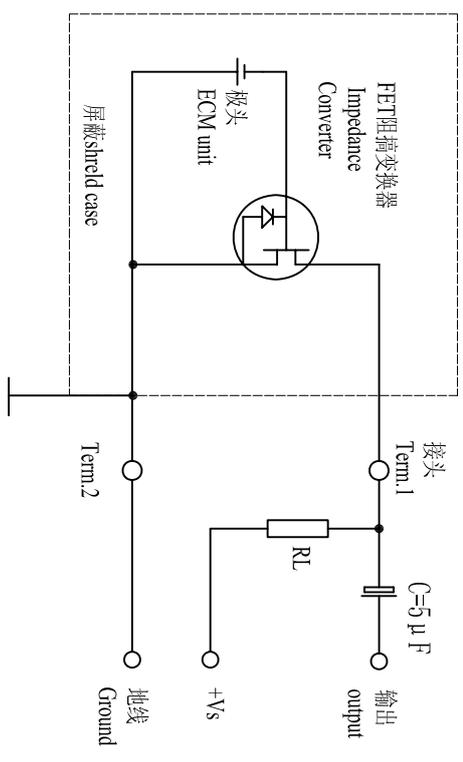

| 编号 NO. | 项目 Items | 规格 Specifications |
|--------|------------------------------|--|
| 1 | 额定电压 Rated Voltage | 4.5V |
| 2 | 工作电压 Operating Voltage | 1.5V~10V |
| 3 | 灵敏度 Sensitivity | -42± 2dB at 1KHz(0dB=1V/µ Pa) -62 ± 2dB at 1KHz(0dB=1V/µ bar) |
| 4 | 消耗电流 Current Consumption | 0.5mA Max |
| 5 | 频率范围 Frequency | 100~16,000Hz |
| 6 | 信噪比 S/N Ratio | ≥60dB |
| 7 | 灵敏度减低 Sensitivity Reduction | within-3dB at 1.5V |
| 8 | 方向性 Directivity | Omnidirectional |
| 9 | 测试条件 Testing Condition | 1000Hz, Vs=4.5V, RL=2.2K Ω |
| 10 | 壳体材料/颜色 Shell Material/Color | AL/Silver |
| 11 | 工作温度 Operating Temperature | -25~+55 °C |
| 12 | 贮存温度 Store Temperature | -25~+55 °C |
| 13 | 重量 Weight | 0.1g |

备注 Note:

TOLERANCES UNLESS NOTED OTHERWISE
 .X ±
 .XX ±
 .XXX ±
 90° FORMED +2°
 ANGLES -1°

| | | | | | | | | |
|-------------|--------|---------|----------|------|--------------|-----------------|----------------|----------|
| DRAWN | DESIGN | CHECKED | APPROVED | DATE | CONTRACT NO. | AGENCY APPROVAL | KEPO MODEL NO. | CUSTOMER |
| | | | | | | | | |
| DWG NO. | | | | | | VER | SCALE | SHEET |
| KF3,002,013 | | | | | | | | |

KEPO CO., LTD.
 TEL: (+86)574-88370330
 FAX: (+86)574-88370329

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| A | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| B | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| C | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| D | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| E | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |