


Quick Disconnect

(Female - Fully Insulated)

SPECIFICATION

Brass
Tin Plated
P.V.C. Insulation

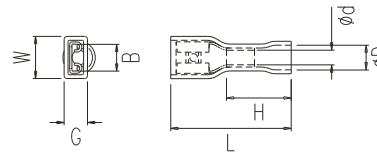

T=Mating Tab Thickness

KARSON
TECHNOLOGY


Part No.	L	B	W	T	H	G	ØD	Ød	Wire Size AWG(mm²)	Current Rating	Insulation Color	Qty/Box	Weight/ Box
KTL-017-01	20.0	3.2	5.8	0.5	10.5	4.3	4.0	1.7	22~16 (0.25~1.65)	10A	Red	2000	1.6kg
KTL-017-02	20.0	3.2	5.8	0.8	10.5	4.3						3000	1.6kg
KTL-017-03	20.0	5.0	7.5	0.5	10.0	4.7						1500	1.3kg
KTL-017-04	20.0	5.0	7.7	0.8	10.0	5.2						2500	2.0kg
KTL-017-05	22.0	6.6	9.7	0.8	10.0	6.0						1700	2.0kg
KTL-017-06	20.0	3.2	5.6	0.5	11.0	5.5	4.3	2.3	16~14 (1.04~2.63)	15A	Blue	1500	1.2kg
KTL-017-07	20.0	3.2	5.6	0.8	11.0	5.5						1500	1.2kg
KTL-017-08	20.0	5.0	7.5	0.5	10.5	5.5						1000	1.0kg
KTL-017-09	20.0	5.0	7.8	0.8	10.5	5.5						2000	1.7kg
KTL-017-10	22.0	6.6	9.3	0.8	10.5	6.0						1700	2.0kg
KTL-017-11	20.0	3.0	5.8	0.5	11.0	6.4	5.4	3.5	12~10 (2.63~6.64)	24A	Yellow	1500	1.4kg
KTL-017-12	20.0	3.0	5.8	0.8	11.0	6.4						1500	1.4kg
KTL-017-13	21.5	5.0	7.8	0.5	11.0	6.4						1000	1.2kg
KTL-017-14	21.5	5.0	7.8	0.8	11.0	6.4						1000	1.2kg
KTL-017-15	23.0	6.6	9.7	0.8	11.0	6.4						1200	1.7kg

Bullet

(Male)

SPECIFICATION

Brass
Tin Plated
P.V.C. Insulation



KARSON
TECHNOLOGY


Part No.	Ød	L	I	ØD	Wire Size AWG(mm²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-019-01	4.00	21.0	10.0	4.0	22~16 (0.25~1.65)	10A	Red	3600	2.4kg
KTL-019-02	4.95							3000	2.1kg
KTL-019-03	4.00							3200	2.2kg
KTL-019-04	5.00	21.0	10.0	4.3	16~14 (1.04~2.63)	15A	Blue	2500	2.0kg
KTL-019-05	3.85							1500	1.5kg
KTL-019-06	5.00	23.5	13.0	5.5	12~10 (2.63~6.64)	24A	Yellow	2000	2.0kg

Bullet

(Female)

SPECIFICATION

Brass
Phosphor Bronze
P.V.C. Insulation




KARSON
TECHNOLOGY

Part No.	Ød	L	I	ØD	Wire Size AWG(mm²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-020-01	4.00	23.0	13.0	4.0	22~16 (0.25~1.65)	10A	Red	1800	2.0kg
KTL-020-02	4.85							1500	1.3kg
KTL-020-03	4.00							1600	1.7kg
KTL-020-04	5.00	23.0	13.0	4.3	16~14 (1.04~2.63)	15A	Blue	1300	1.9kg
KTL-020-05	3.85							1000	1.2kg
KTL-020-06	5.00	24.0	14.0	5.5	12~10 (2.63~6.64)	24A	Yellow	1000	1.5kg

Butt Splices

SPECIFICATION

Electrolytic Copper Tube
Tin Plated
P.V.C. Insulation



KARSON
TECHNOLOGY

Part No.	Ød	L	I	ØD	Wire Size AWG(mm²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-021-01	1.9	23.7	15.0	4.0	22~16 (0.25~1.65)	19A	Red	2000	1.8kg
KTL-021-02	2.4	23.7	15.0	4.5	22~16 (0.25~1.65)	27A	Blue	1500	1.6kg
KTL-021-03	4.0	25.7	15.0	6.8	22~16 (0.25~1.65)	48A	Yellow	1500	1.6kg