

**Technical Data**

**Material (block)**




- Contact: Brass (Cu Zn)  
(metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromotized
- Surface of solder tail: Tin plated
- Insulator body: Poly butylene-Terephthlene-PBT(30% Glass Filled)  
(housing) (UL 94 V-0)

**Electrical**

- Current rating: 10 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 250V
- Conductor Size: 0.5 to 4mm<sup>2</sup>
- Stripping Length: 7.5 to 8mm<sup>2</sup>
- AWG: 22 - 18

**Mechanical**


- Operating temperatures: -30°C to +120°C
- Short time peak temperature: +200°C max

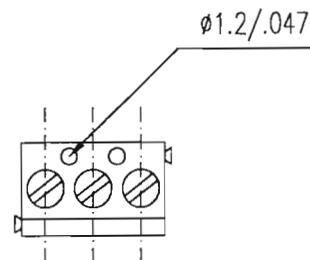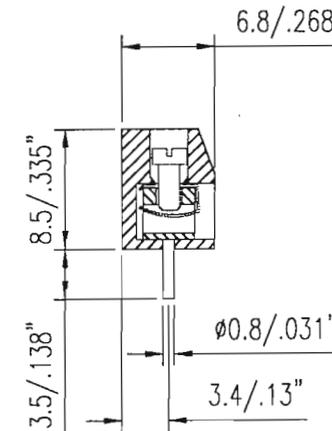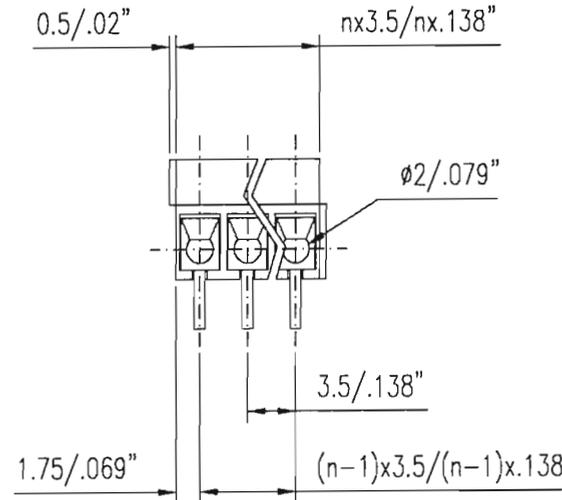

Recommended PC-Board-Holes diameter:  $\phi 1.2\text{mm}$  to  $\phi 1.4\text{mm}$   
n = number of contacts

**\*\*Notice:**  
To avoid accumulated tolerance-variations of Terminal-Blocks to PC - Board spacing limit the number of contacts to not more than 24 contacts per row

**HOW TO ORDER**

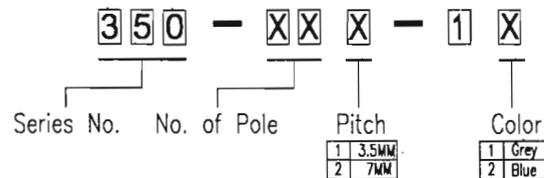

**KARSON TECHNOLOGY LIMITED**

**TITLE: Type 350 Connector**

Unit 12,11/F., Vanta Industrial Centre, 21-33 Tai Lin Pai Road, Kwai Chung, N.T., Hong Kong.  
Tel : (852) 2421 0833 Fax : (852) 2421 9951 [www.karson-tech.com.hk](http://www.karson-tech.com.hk)

PART NO. 350-XXX-XX  
DWG. NO. KB1283-0

DATE 19 SEP 98  
UNIT : MM

SCALE: NTS  
DRAWING BY C.L.