

USB, Ausführung A + B, gewinkelt, SMD

USB, version A + B , angled, SMD



Isolierkörper

Nylon PA9T

Kontakte

Phosphorbronze, t=0.25mm

Gehäuse

Messing t=0.3mm

Oberfläche: Vernickelt

Durchschlagsspannung

500V AC (1min)

Isolationswiderstand

1000M Ω min.

Nennspannung und Strom

1.5A bei 250V AC minimum

Insulator

Nylon PA9T

Contacts

Phosphorbronze, t=0.25mm

Shell

Brass t=0.3

Finish: Nickel Plated

Withstanding voltage







500V AC (1min)

Insulation resistance

1000M Ω min.

Rated voltage and current

1.5A at 250V AC minimum

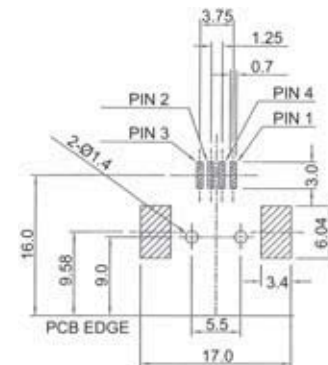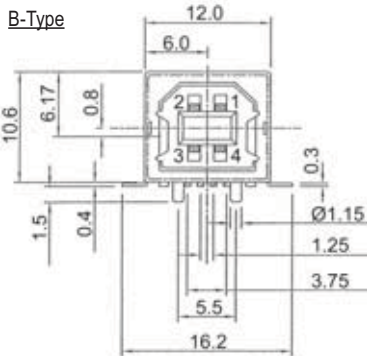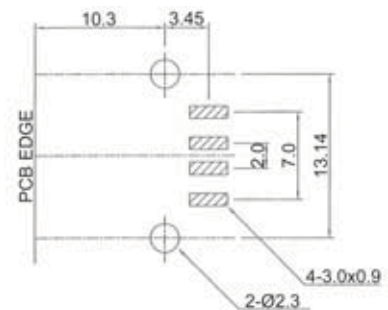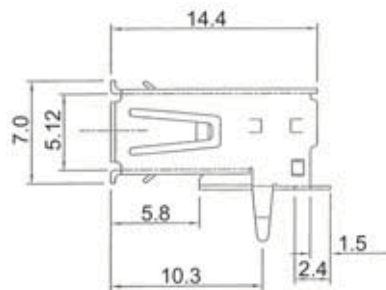

Bestellcode : **A** - **USB** - **x** / **SMT** - **x**
Ordercode :

Bitte „x“ durch die unten geeignete Optionen ersetzen
Please replace „x“ with appropriate options listed below

1.

2.

1.

Ausführung

- A -Bauform A
- B -Bauform B

Version

- A -Type A
- B -Type B

2.

Verpackung

- Tray
- R -Rolle

Packing

- Tray
- R -Reel