


Metallized Polyester Film Capacitors MKT Radial Potted Type

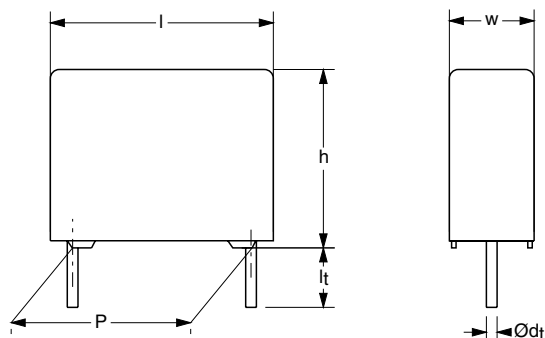

Dimensions in mm

APPLICATIONS

Blocking and coupling. Bypass and energy reservoir

MARKING

C-value; tolerance; rated voltage; code for manufacturer; year and week of manufacturer; manufacturer's type designation

DIELECTRIC

Polyester film

ELECTRODES

Vacuum deposited aluminum

ENCAPSULATION

Flame retardant plastic case and epoxy resin (UL-class 94 V-0)

CONSTRUCTION

Wound mono construction

LEADS

Tinned wire

CAPACITANCE RANGE (E12 SERIES)

0.0047 to 0.68 μ F

FEATURES

Available taped and loose in box

Lead (Pb)-free product

RoHS-compliant product

CAPACITANCE TOLERANCE

$\pm 10\%$; $\pm 5\%$

RATED (DC) VOLTAGE

100 V; 250 V; 400 V; 630 V

RATED (AC) VOLTAGE

63 V; 160 V; 220 V; 250 V

CLIMATIC CATEGORY

55/105/56

RATED TEMPERATURE

85 °C

MAXIMUM APPLICATION TEMPERATURE

100 °C

REFERENCE SPECIFICATIONS

IEC 60384-2

PERFORMANCE GRADE

Grade 1 (long life)


DETAIL SPECIFICATION

For more detailed data and test requirements contact:
filmcaps.roeselare@vishay.com



RoHS
COMPLIANT

COMPOSITION OF CATALOG NUMBER

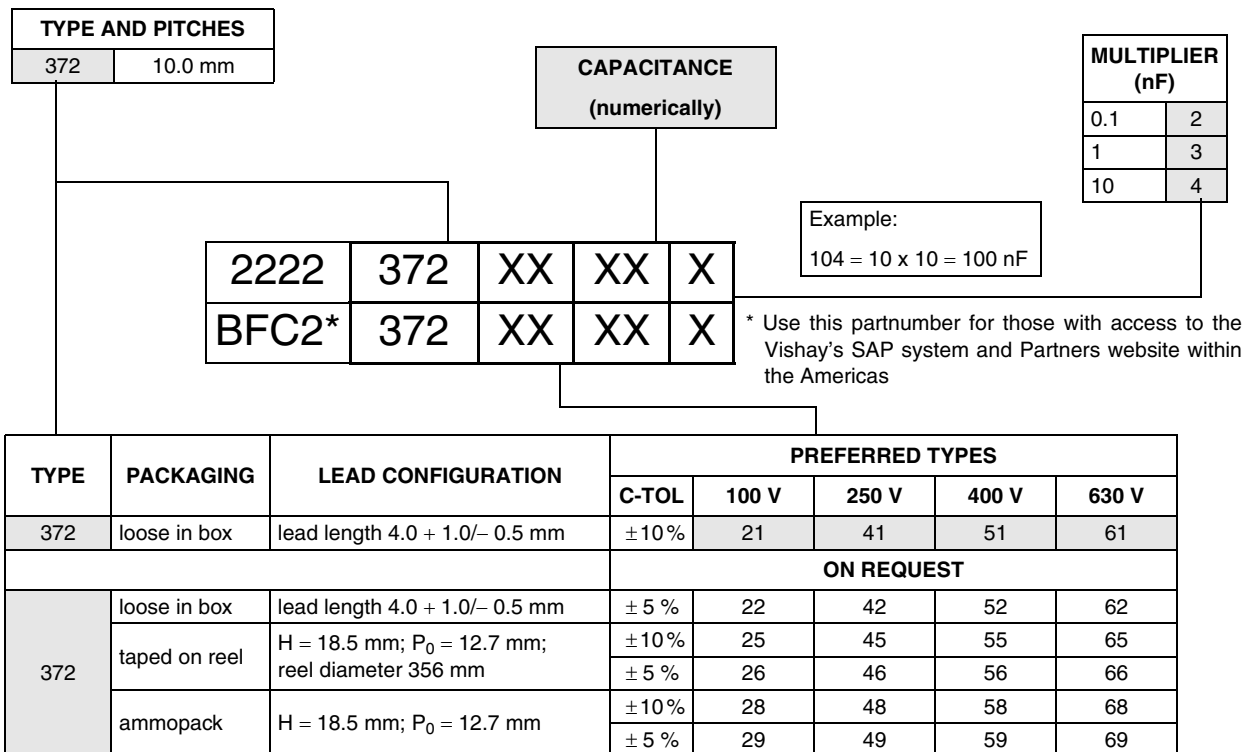

SPECIFIC REFERENCE DATA

DESCRIPTION	VALUE			
Tangent of loss angle: C ≤ 0.1 μF 0.1 μF < C ≤ 0.68 μF	at 1 kHz	at 10 kHz	at 100 kHz	
	≤ 75 × 10 ⁻⁴	≤ 130 × 10 ⁻⁴	≤ 250 × 10 ⁻⁴	
	≤ 75 × 10 ⁻⁴	≤ 130 × 10 ⁻⁴	≤ 300 × 10 ⁻⁴	
Rated voltage pulse slope (dU/dt) _R	at 100 V (DC)	at 250 V (DC)	at 400 V (DC)	at 630 V (DC)
	34 V/μs	50 V/μs	80 V/μs	120 V/μs
R between leads, for C ≤ 0.33 μF: at 100 V; 1 minute at 500 V; 1 minute	> 15000 MΩ	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ
RC between leads, for C > 0.33 μF at 100 V; 1 minute	> 5000 s			
R between interconnected leads and case (foil method)	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ	> 30000 MΩ
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	160 V; 1 minute	400 V; 1 minute	640 V; 1 minute	1008 V; 1 minute
Withstanding (DC) voltage between leads and case	200 V; 1 minute	500 V; 1 minute	800 V; 1 minute	1260 V; 1 minute

**Metallized Polyester Film Capacitors Vishay BCcomponents**
MKT Radial Potted Type **$U_{Rdc} = 100\text{ V}$, $U_{Rac} = 63\text{ V}$**

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.1 0.12 0.15 0.18	4.0 × 10.0 × 12.5	0.7	21104	1000	1400	750
			21124			
			21154			
			21184			
0.22 0.27 0.33	4.0 × 10.0 × 12.5	0.7	21224	1000	1400	750
			21274			
			21334			
0.39 0.47	5.0 × 11.0 × 12.5	0.9	21394	1000	1100	600
			21474			
0.56 0.68	6.0 × 12.0 × 12.5	1.0	21564	750	900	500
			21684			

 $U_{Rdc} = 250\text{ V}$; $U_{Rac} = 160\text{ V}$







C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm		SPQ	SPQ
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.047 0.056 0.068 0.082 0.1	4.0 × 10.0 × 12.5	0.7	41473	1000	1400	750
			41563			
			41683			
			41823			
			41104			
0.12 0.15	5.0 × 11.0 × 12.5	0.9	41124	1000	1100	600
			41154			
0.18 0.22	6.0 × 12.0 × 12.5	1.0	41184	750	900	500
			41224			



$U_{Rdc} = 400 \text{ V}$; $U_{Rac} = 220 \text{ V}$

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.0047 0.0056 0.0068 0.0082 0.01 0.012 0.015 0.018 0.022 0.027 0.033	4.0 × 10.0 × 12.5	0.7	51472 51562 51682 51822 51103 51123 51153 51183 51223 51273 51333	1000	1400	750
0.039 0.047 0.056	5.0 × 11.0 × 12.5	0.9	51393 51473 51563	1000	1100	600
0.068 0.082	6.0 × 12.0 × 12.5	1.0	51683 51823	750	900	500



 $U_{Rdc} = 630 \text{ V}$; $U_{Rac} = 250 \text{ V}$

C (μF)	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 372 AND PACKAGING			
			LOOSE IN BOX		REEL	AMMOPACK
			It = 4.0 + 1.0/- 0.5 mm		SPQ	SPQ
			C-tol = ± 10 %	SPQ		
			last 5 digits of catalog number			
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm						
0.01 0.012 0.015 0.018 0.022	4.0 × 10.0 × 12.5	0.6	61103 61123 61153 61183 61223	1000	1400	750
0.027 0.033	5.0 × 11.0 × 12.5	0.9	61273 61333	1000	1100	600
0.039 0.047	6.0 × 12.0 × 12.5	1.0	61393 61473	750	900	500

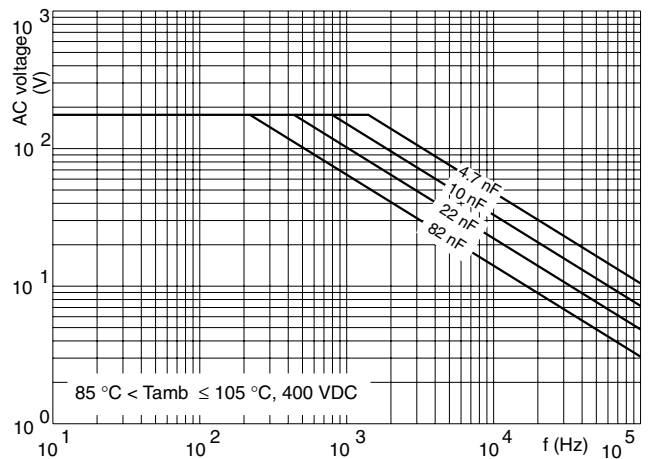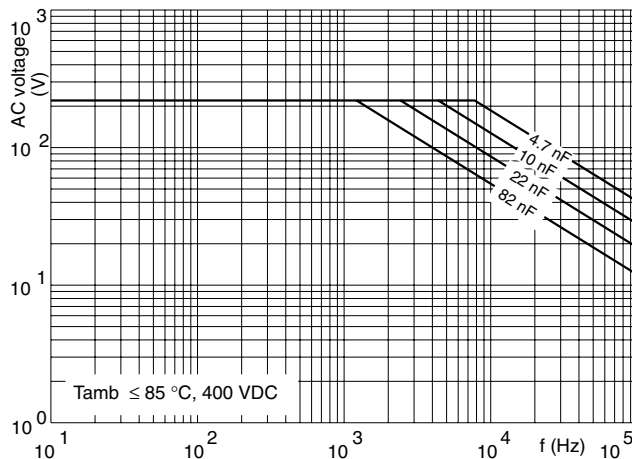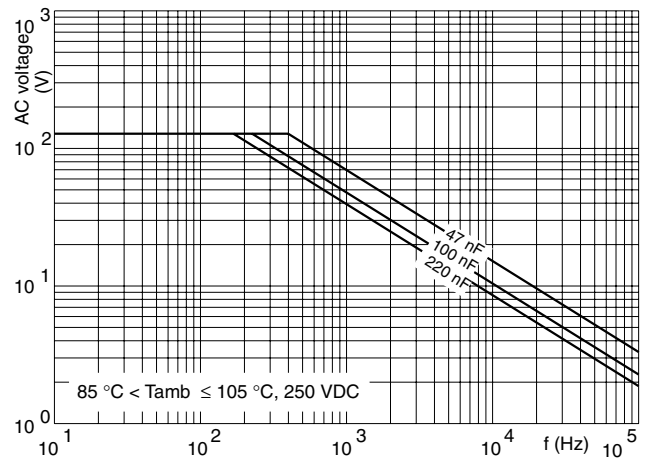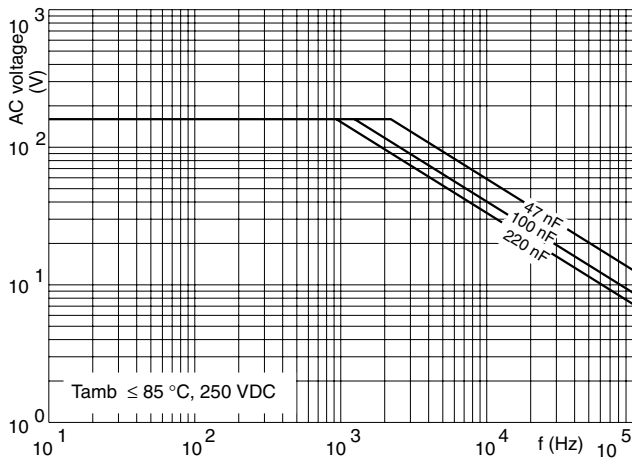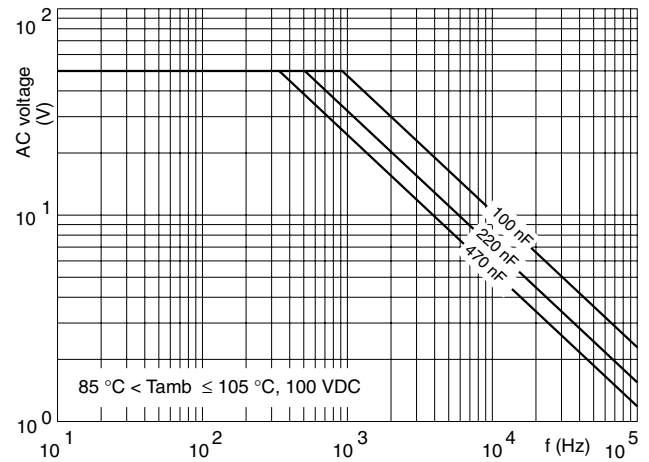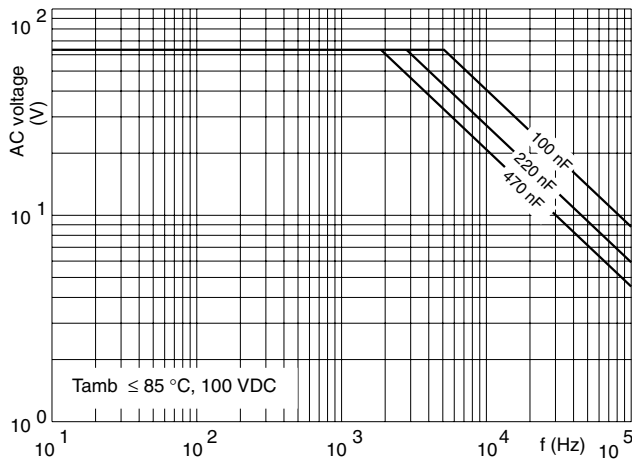
**MAXIMUM RMS VOLTAGE (SINEWAVE) AS A FUNCTION OF FREQUENCY**

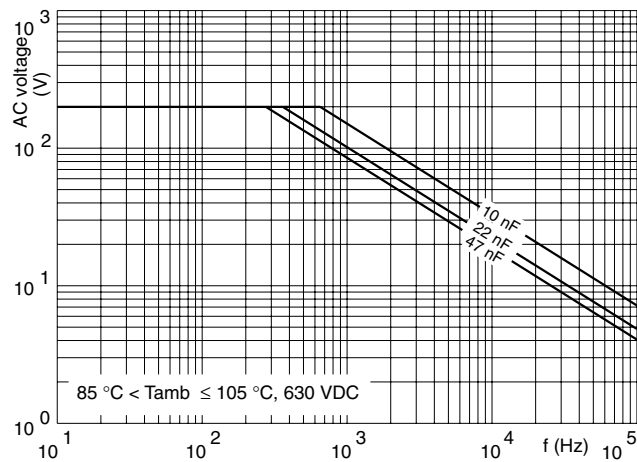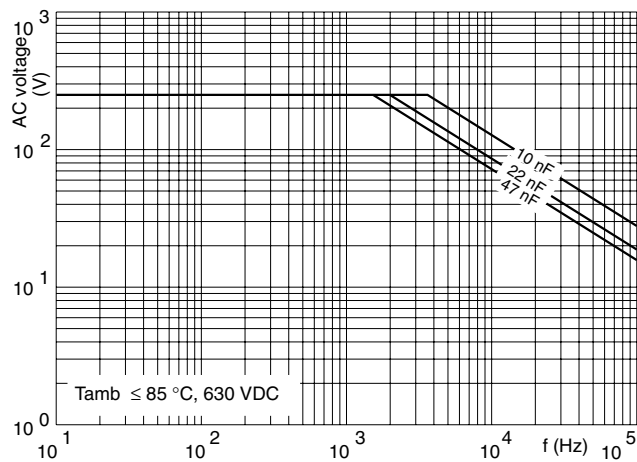

CAPACITANCE

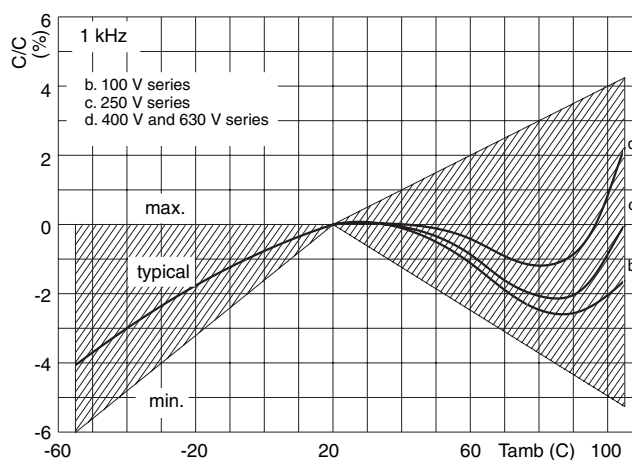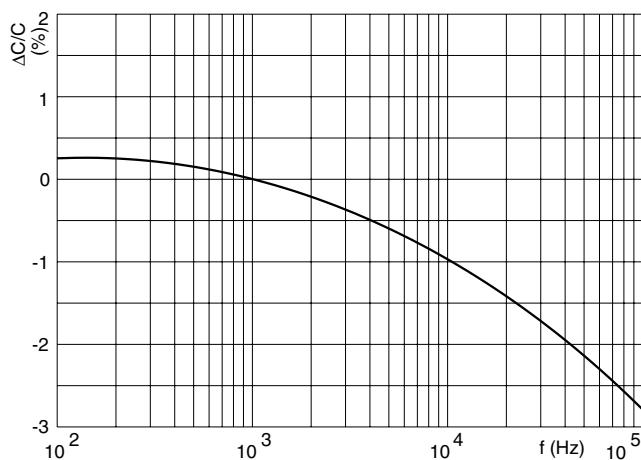

IMPEDANCE

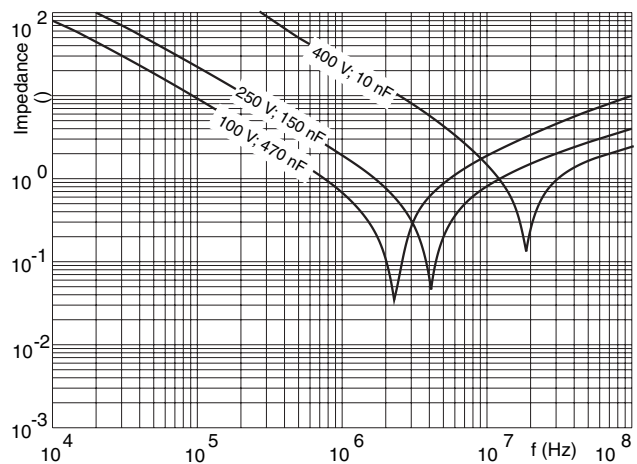



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.