


D-Subminiature Connector Crimp Housing

DH Series

MALE

Specifications:

Shell: Steel Zinc plated or Tin plated
 Insulator: Glass fiber PBT
 Number of Contact: 9, 15, 25, 37 50
 Current Rating: 5 amp.
 Dielectric Strength: 1000V for one minute
 Insulator Resistance: 1000MΩ Min. at 500V DC
 Temperature: -55°C ~ +105°C

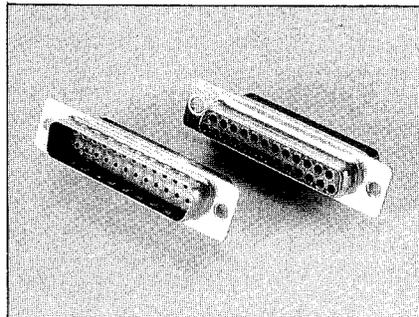


FEMALE






Specifications:

Shell: Steel Zinc plated or Tin plated
 Insulator: Glass-fiber PBT
 Number Of Contact: 9, 15, 25, 37 50
 Current Rating: 5 amp.
 Dielectric Strength: 1000V for one minute
 Insulator Resistance: 1000MΩ Min. at 500V DC
 Temperature: -55°C ~ +105°C

MALE

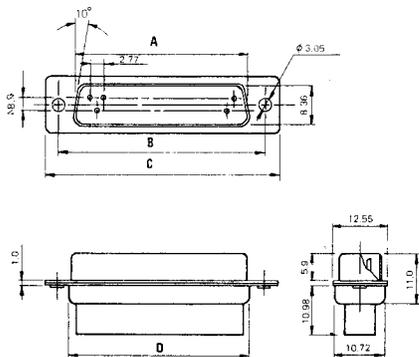

FEMALE

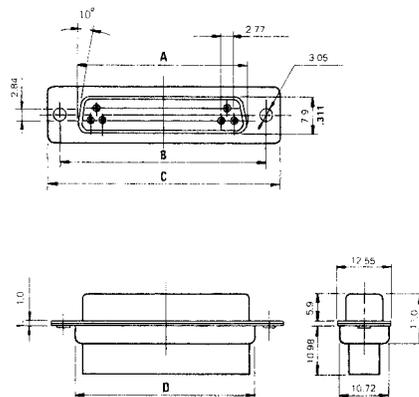

D-PH-(SERIES) DIMENSIONS

Position	A	B	C	D
DH-9HP	16.33	24.99	30.81	19.28
DH-15HP	24.66	33.32	39.14	27.51
DH-25HP	38.38	47.04	53.04	41.3
DH-37HP	54.84	63.5	69.32	57.71
DH-50HP	53.41	61.12	66.93	55.32

D-SH-(SERIES) DIMENSIONS

Position	A	B	C	D
DH-9HS	16.33	24.99	30.81	19.28
DH-15HS	24.66	33.32	39.14	27.51
DH-25HS	38.38	47.04	53.04	41.3
DH-37HS	54.84	63.5	69.32	57.71
DH-50HS	52.43	61.12	66.93	55.32