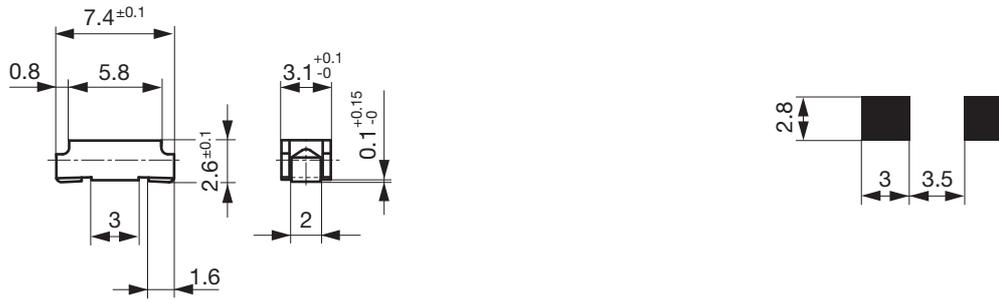


OMF 125

Dimensions

Length  7.4 mm

OMF 125

Solder pads

Pre-Arcing Time

Rated Current In	1.0 x In min.	2.0 x In max.	4.0 x In max.
6.3 A - 8 A	4 h	5 s	50 ms
10 A	4 h	20 s	60 ms

Variants

Order Number	Type	Fuse	Holder	Rated Current [A]	Rated Voltage [V]	Breaking Capacity	Voltage Drop 1.0 In typ [mV]	Power Dissipation 1.0 In typ [mW]	Melting I ² t 4.0 In typ [A ² s]	  
3404.0003.xx	OMF 125	●		0.063	125	1)	2550	160	0.00011	● ●
3404.0004.xx	OMF 125	●		0.1	125	1)	1770	180	0.0067	● ●
3404.0049.xx	OMF 125	●		0.125	125	1)	1770	220	0.0011	● ●
3404.0005.xx	OMF 125	●		0.16	125	1)	1700	270	0.0018	● ●
3404.0006.xx	OMF 125	●		0.25	125	1)	990	250	0.0058	● ●
3404.0043.xx	OMF 125	●		0.35	125	1)	990	350	0.0076	● ●
3404.0044.xx	OMF 125	●		0.375	125	1)	990	370	0.013	● ●
3404.0007.xx	OMF 125	●		0.4	125	1)	960	380	0.016	● ●
3404.0045.xx	OMF 125	●		0.5	125	1)	350	150	0.01	● ●
3404.0008.xx	OMF 125	●		0.63	125	1)	290	180	0.02	● ●
3404.0046.xx	OMF 125	●		0.75	125	1)	260	200	0.031	● ●
3404.0009.xx	OMF 125	●		1	125	1)	220	220	0.078	● ●
3404.0010.xx	OMF 125	●		1.25	125	1)	220	280	0.14	● ●
3404.0047.xx	OMF 125	●		1.5	125	1)	200	300	0.24	● ●
3404.0011.xx	OMF 125	●		1.6	125	1)	200	320	0.27	● ●
3404.0012.xx	OMF 125	●		2	125	1)	200	400	0.44	● ●
3404.0013.xx	OMF 125	●		2.5	125	1)	190	480	0.97	● ●
3404.0014.xx	OMF 125	●		3	125	1)	190	570	1.3	● ●
3404.0048.xx	OMF 125	●		3.15	125	1)	190	600	1.2	● ●
3404.0015.xx	OMF 125	●		3.5	125	1)	140	490	1.6	● ●
3404.0016.xx	OMF 125	●		4	125	1)	140	560	2.1	● ●
3404.0017.xx	OMF 125	●		5	125	1)	140	700	2.9	● ●
3404.0018.xx	OMF 125	●		6.3	125	1)	110	690	14	● ●
3404.0019.xx	OMF 125	●		7	125	1)	105	740	16	● ●
3404.0020.xx	OMF 125	●		8	125	1)	100	800	20	● ●
3404.0021.xx	OMF 125	●		10	125	1)	80	800	54	● ●

1) 100 A @ 125 VAC/DC

OMF 125

Packaging Unit	.11 Plastic Bag (100 pcs.)
	.22 Blister Tape 18 cm Reel (750 pcs.)
	.24 Blister Tape 33 cm Reel (3000 pcs.)
