

.200" (5.08mm) Power Plug


TP Series

Features:


- 4 Circuits
- Two PC Tail lengths (right angel)
- Housing, 94V-2 nylon 6/6, natural
- Terminal, phosphor bronze, .084" (2.13mm) dia; Plating, electro-tin/copper
- Friction lock feature on right angle version for stability during wave soldering
- Friction lock inside housing for improved retention of mating connector

Specifications:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -25°C ~ + 90°C
- Contact resistance: Initial Value/10mΩ max. After environmental testing/20mΩ max.
- Insulation resistance: 1,000 MΩ min
- Withstand Voltage: 1500V AC/minute
- Applicable PC board thickness: .063" (1.6mm)


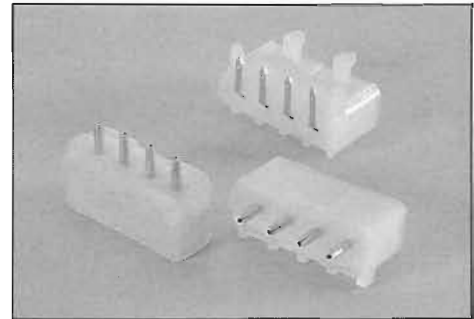


TP-4S

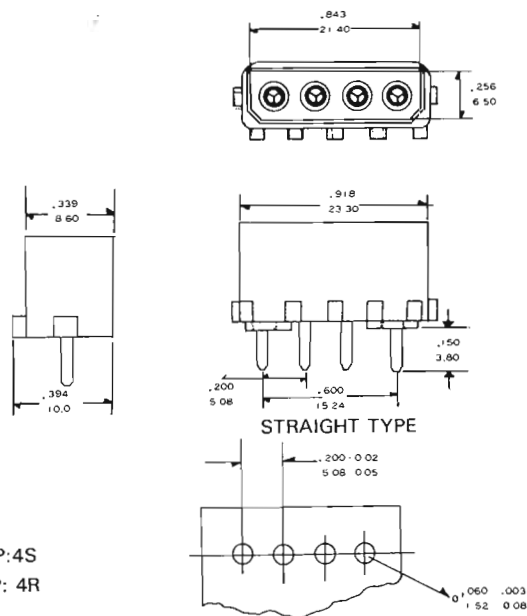

No. Of Contacts: TP:4S
TP: 4R

TP-4R

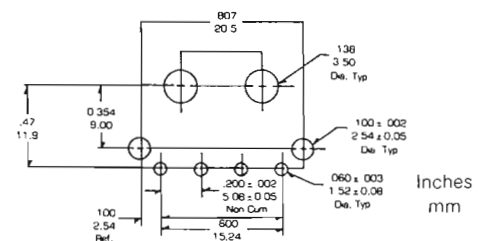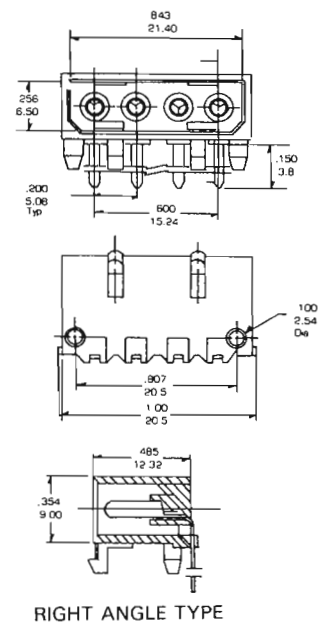

Contact Type :

- S: Straight
R: Right Angle