

**F5525** = Product group; Product group discount F 55 2\_

## OTTO HEIL IEC Female Power Insert Connectors

Pin Temperature: 65°C  
Series: GSD4, GTK

### New Products

#### Technical Specifications

Nr. of Poles: .....2+PE  
 Continuous Current: .....10A (UL,CSA:15A)  
 Pin Temperature: .....70°C  
 Rated Voltage: .....250V AC

#### GSD4\_

##### Features

- Appliance socket, longitudinal flange, distance between fixing holes 40mm
- Screw terminals
- GSD4-4,8: 4,8mm
- GSD4-6,3: 6,3mm
- RoHS compliant

#### GSD4SI, GSD4SI-6,3

##### Features

- Appliance socket, snap-in assembly
- Connection by
- GSD4SI: solder lug terminals
- GSD4SI-6,3: 6,3mm flat cable plug
- RoHS compliant

#### GTK0\_ A

##### Features

- Combination of
- GTK2-2A: two appliance sockets
- GTK2-3A: three appliance sockets
- GTK2-4A: four appliance sockets
- Solder-lug terminals
- Snap-in panel
- RoHS compliant

#### Dimensions

Type	$\pm 0,2$ [mm]	$F \pm 0,2$ [mm]
GTK0-2A	51	48,3
GTK0-3A	75	72,3
GTK0-4A	99	96,3

#### Note

You will find suitable receptacles for 4,8mm tabs in product group F1313, and receptacles for 6,3mm tabs in product group F1316.

#### Norms

EN60320 T2-2, standard sheet F

#### Approvals




#### Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces


Manufacturer: Otto Heil

<http://www.otto-heil.de>

Part Nr.	Part description
GSD4-4,8	! IEC Power Jack, Spacing=40mm 4,8mm
GSD4-6,3	! IEC Power Jack, Spacing=40mm 6,3mm
GSD4SI	IEC Power Jack, Snap-In
GSD4SI-6,3	! IEC Power Jack, Snap-In, 6,3mm
GTK0-2A	IEC Combi, 2xJack, Snap-In
GTK0-3A	! IEC Combi, 3xJack, Snap-In
GTK0-4A	! IEC Combi, 4xJack, Snap-In

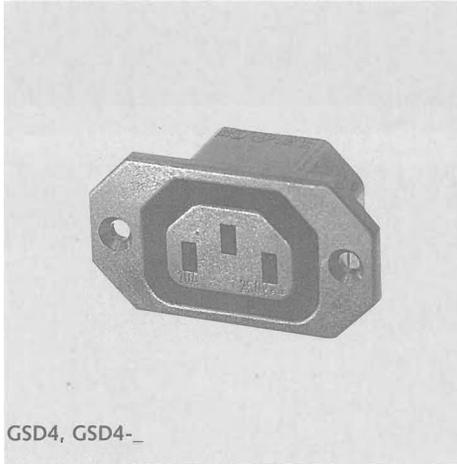


GSD4, GSD4\_

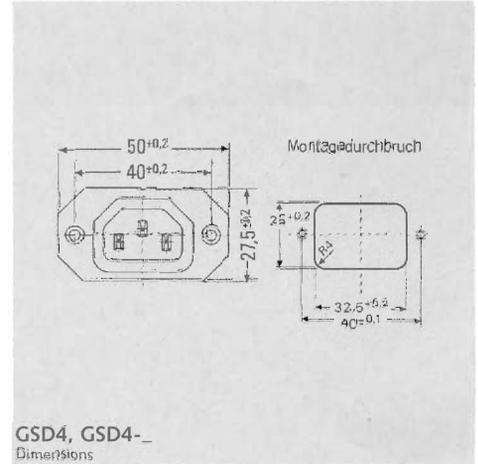


GSD4, GSD4\_ Dimensions




GSD4SI, GSD4SI-6,3

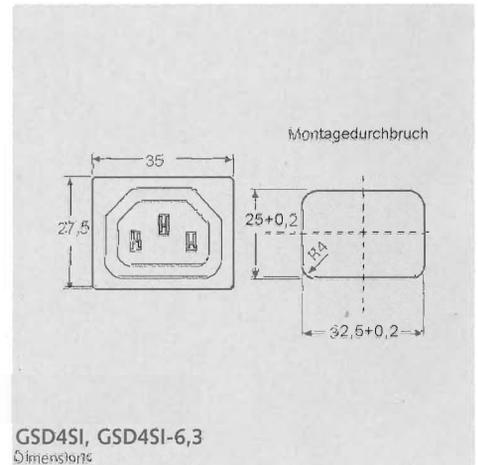

GSD4SI, GSD4SI-6,3 Dimensions

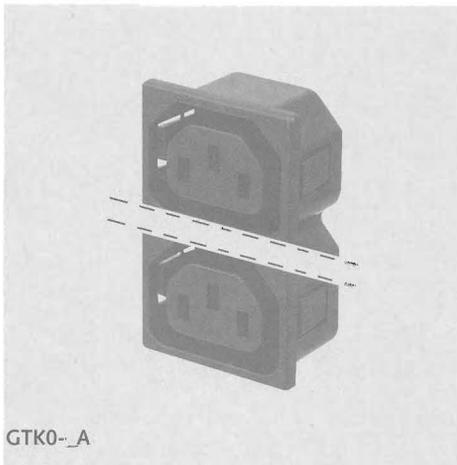

GTK0\_ A

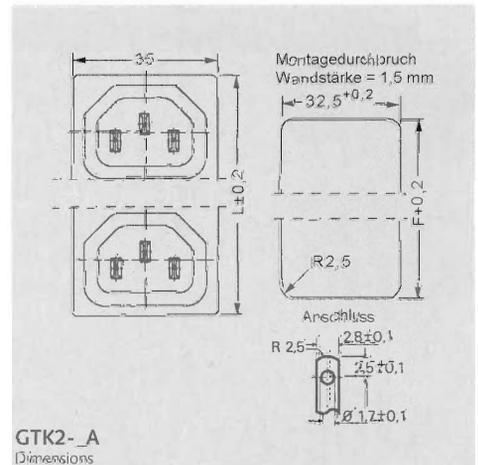

GTK2\_ A Dimensions