

# Power Housing .200" (5.08mm) Center Crimp



## Features:

- 4 Circuits
- Accepts cantilever crimp terminal
- Housing Nylon (UL 94V-2)
- Mates with .084" (2.13mm) crimp terminal
- Terminal Retention to Housing - 8lbs. (3.63kg) minimum

## Specifications:



- Current rating: 7A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -25°C ~ + 90°C
- Contact resistance: Initial Value/10mΩ max. After environmental testing/20mΩ max.
- Insulation resistance: 1,000 MΩ min
- Withstand Voltage: 1500V AC/minute
- Applicable wires: AWG #22 ~ #18

## FEMALE

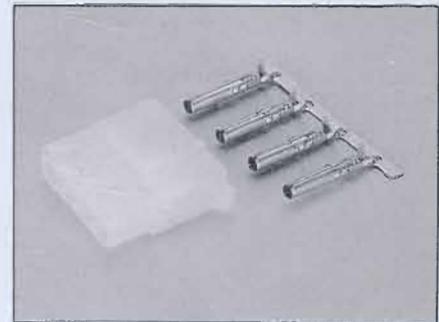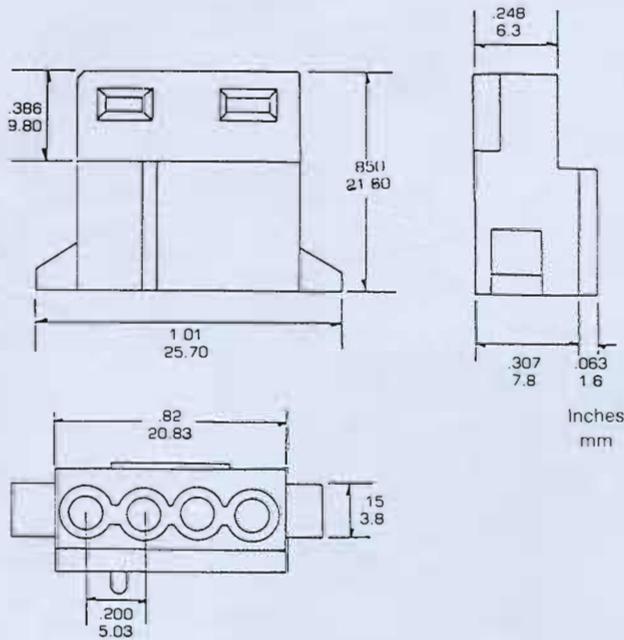

No. of Contacts: TH-4S

## MALE

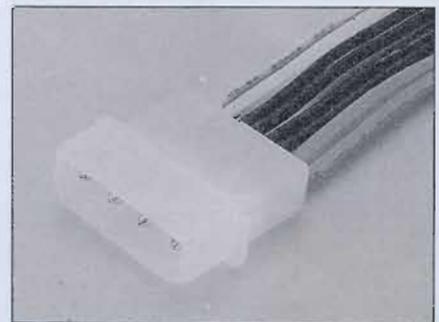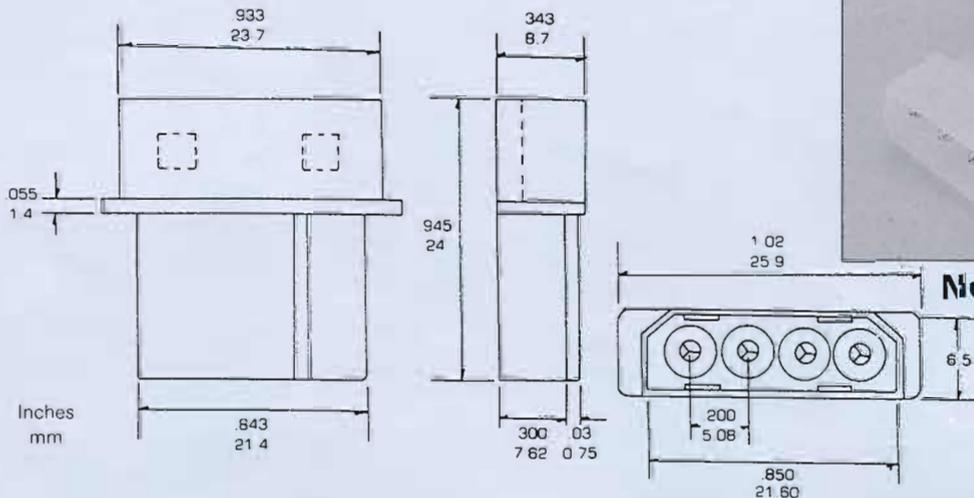

No. Of Contact: TH-4P