

F1421 = Product group; Product group discount F 14 2_

Nylon Crimp Housings/Contacts
Pitch: 2,54mm
Series: NSG25

Features

- For easy manufacturing of multipolar connections
- RoHS compliant

Technical Specifications

Insulation Shell:Nylon (UL94V-0)
Rated Voltage:250V AC/DC
Rated Current:3A
Insulation Resistance, Min.:.....1000MΩ
Dielectric Strength (1 Min.):.....1000V AC
Temperature Range:-25...+85°C
Contact Resistance, Min.:.....10mΩ

Dimensions

Part Nr.	Pole	A±0,05	B±0,3
		[mm]	[mm]
NSG25-2	2	2,54	5,6
NSG25-3	3	5,08	8,10
NSG25-4	4	7,62	10,70
NSG25-5	5	10,16	13,20
NSG25-6	6	12,70	15,70
NSG25-8	8	17,78	20,80
NSG25-10	10	22,86	25,90
NSG25-20	20	48,26	51,30

NSK25-0
Crimp Connector

Features

- For use with connector housing NSG25-__
- Suitable for cables AWG30...AWG22 (Ø 0,254...0,643mm)
- Contact made of tin-plated brass
- Form of delivery: taped
- RoHS compliant

Note

You will find suitable pin headers at product groups F1442 and F1443.


You will find EWZ225D crimping tools in our red "Components and Devices" catalogue at product group T4611.

Terms of Delivery


Minimum order quantity: 1 PKU = 100 pieces

Manufacturer: Various


Part Nr.	Part description
NSG25-2	Crimp Housing 2-Pole 2,54mm
NSG25-3	Crimp Housing 3-Pole 2,54mm
NSG25-4	Crimp Housing 4-Pole 2,54mm
NSG25-5	Crimp Housing 5-Pole 2,54mm
NSG25-6	Crimp Housing 6-Pole 2,54mm
NSG25-8	Crimp Housing 8-Pole 2,54mm
NSG25-10	Crimp Housing 10-Pole 2,54mm
NSG25-20	Crimp Housing 20-Pole 2,54mm
NSK25-0	Crimp Contact for NSG25_

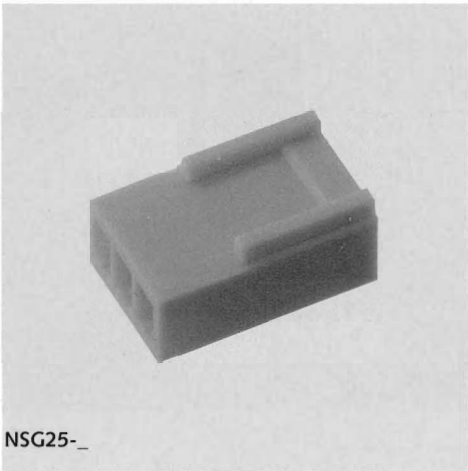


NSG25-__

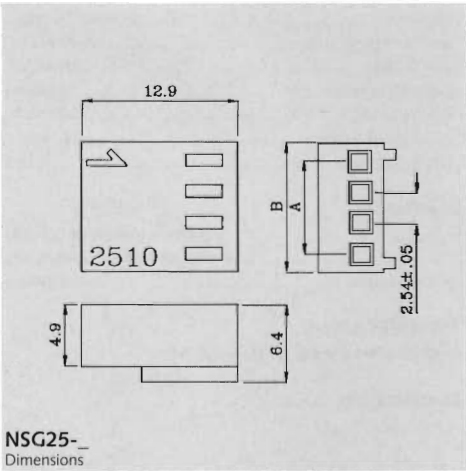

NSG25-__
Dimensions

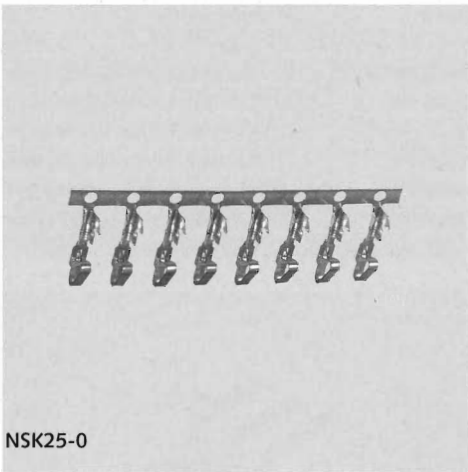

NSK25-0

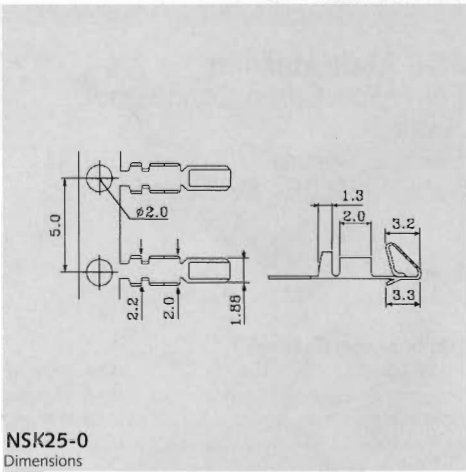

NSK25-0
Dimensions