


Isolier Distanz-Rollen Kunststoff

Entretoises isolantes

Insulating spacers

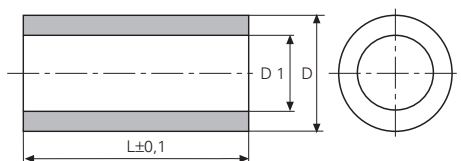

Werkstoff:

PS=Polystyrol, schwarz

PA=Polyamid, schwarz

PC=Polycarbonat, grau

Matière:

PS=polystyrène, noire

PA=polyamide, noire

PC=polycarbonate, gris

Material:

PS=polystyrene, black

PA=polyamid, black

PC=polycarbonate, grey

Temperaturbeständigkeit:

PS -10°C bis +80°C

PA -40°C bis +110°C

PC -50°C bis +135°C

Résistant à une température de:

PS -10°C à +80°C

PA -40°C à +110°C

PC -50°C à +135°C

Temperature range:

PS -10°C up to +80°C

PA -40°C up to +110°C

PC -50°C up to +135°C

für Bolzen pour borne for stud mm	øD mm	øD1 mm	L mm	Artikelnummer Numéro d'article Part-No.	für Bolzen pour borne for stud mm	øD mm	øD1 mm	L mm	Artikelnummer Numéro d'article Part-No.
M2.5	5	2.7	2	x05002027.pa		7	3.6	14	x07014036.ps
	5	2.7	3	x05003027.pa		7	3.6	15	x07015036.pc
	5	2.7	5	x05005027.pa		7	3.6	15	x07015036.ps
	5	2.7	7.5	x05007527.pa		7	3.6	16	x07016036.ps
	5	2.7	10	x05010027.pa		7	3.6	17	x07017036.ps
	5	2.7	13.5	x05013527.pa		7	3.6	18	x07018036.pc
	5	2.7	15	x05015027.pa		7	3.6	18	x07018036.ps
	5	2.7	20	x05020027.pa		7	3.6	18.5	x07018536.pc
M3	5	3.2	10	x05010032.ps		7	3.6	19	x07019036.ps
	6	3.2	3	x06003032.pa		7	3.6	20	x07020036.pc
	6	3.2	4.5	x06004532.pa		7	3.6	20	x07020036.ps
	6	3.2	5	x06005032.pa		7	3.6	25	x07025036.pc
	6	3.2	5.6	x06005632.pa		7	3.6	25	x07025036.ps
	6	3.2	6.4	x06006432.pa		7	3.6	27	x07027036.ps
	6	3.2	7	x06007032.pa		7	3.6	28.8	x07028836.pc
	6	3.2	7.4	x06007432.pa		7	3.6	30	x07030036.pc
	6	3.2	8	x06008032.pa		7	3.6	30	x07030036.ps
	6	3.2	9	x06009232.pa		7	3.6	35	x07035036.pc
	6	3.2	10	x06010032.pa		7	3.6	35	x07035036.ps
	6	3.2	15	x06015032.pa	M4	7	4.1	10	x07010041.pc
	6	3.2	20	x06020032.pa		8	4.5	3	x08003045.pc
	6	3.2	30	x06030032.pa		8	4.5	3	x08003045.ps
	7	3.6	2	x07002036.pc		8	4.5	4	x08004045.ps
	7	3.6	3	x07003036.pc		8	4.5	5	x08005045.pa
	7	3.6	3	x07003036.ps		8	4.5	5	x08005045.pc
	7	3.6	4	x07004036.ps		8	4.5	5	x08005045.ps
	7	3.6	5	x07005036.pc		8	4.5	6	x08006045.ps
	7	3.6	5	x07005036.ps		8	4.5	7	x08007045.ps
	7	3.6	6	x07006036.pc		8	4.5	8	x08008045.pc
	7	3.6	6	x07006036.ps		8	4.5	8	x08008045.ps
	7	3.6	6.5	x07006536.ps		8	4.5	9	x08009045.ps
	7	3.6	7	x07007036.pc		8	4.5	10	x08010045.pa
	7	3.6	7	x07007036.ps		8	4.5	10	x08010045.pc
	7	3.6	8	x07008036.pc		8	4.5	10	x08010045.ps
	7	3.6	8	x07008036.ps		8	4.5	11	x08011045.ps
	7	3.6	9	x07009036.ps		8	4.5	12	x08012045.ps
	7	3.6	10	x07010036.pc		8	4.5	13	x08013045.ps
	7	3.6	10	x07010036.ps		8	4.5	14	x08014045.ps
	7	3.6	11	x07011036.ps		8	4.2	15	x08015042paw
	7	3.6	12	x07012036.ps		8	4.5	15	x08015045.pa
	7	3.6	13	x07013036.ps		8	4.5	15	x08015045.pc

Andere Abmessungen auf Anfrage

Autres dimensions sur demande

Further dimensions on request

Isolier Distanz-Rollen Kunststoff

Entretoises isolantes

Insulating spacers

für Bolzen pour borne for stud mm	øD mm	øD1 mm	L mm	Artikelnummer Numéro d'article Part-No.	für Bolzen pour borne for stud mm	øD mm	øD1 mm	L mm	Artikelnummer Numéro d'article Part-No.
	8	4.5	15	x08015045.ps		10	5.5	10	x10010055.ps
	8	4.2	20	x08020042paw		10	5.5	15	x10015055.pc
	8	4.5	20	x08020045.pa		10	5.5	15	x10015055.ps
	8	4.5	20	x08020045.pc		10	5.5	20	x10020055.pc
	8	4.5	20	x08020045.ps		10	5.5	20	x10020055.ps
	8	4.5	25	x08025045.pc		10	5.5	25	x10025055.pc
	8	4.5	25	x08025045.ps		10	5.5	25	x10025055.ps
	8	4.5	30	x08030045.pa		10	5.5	30	x10030055.pc
	8	4.5	30	x08030045.pc		10	5.5	30	x10030055.ps
	8	4.5	30	x08030045.ps		10	5.5	35	x10035055.pc
	8	4.5	35	x08035045.pc		10	5.5	35	x10035055.ps
	8	4.5	35	x08035045.ps		10	5.5	35	x10035055.ps
M5	10	5.5	2.5	x100025550pc	M6	10	6.2	5	x10005062.pa
	10	5.5	3	x10003055.pc		10	6.2	5	x10005062.ps
	10	5.5	3	x10003055.ps		10	6.2	10	x10010062.pa
	10	5.2	5	x10005052.pa		10	6.2	10	x10010062.ps
	10	5.2	5	x10005052paw		10	6.2	15	x10015062.ps
	10	5.2	10	x10010052.pa		10	6.2	20	x10020062.pa
	10	5.2	20	x10020052.pa		10	6.2	20	x10020062.ps
	10	5.2	30	x10030052.pa		10	6.2	25	x10025062.ps
	10	5.5	5	x10005055.pc		10	6.2	30	x10030062.pa
	10	5.5	5	x10005055.ps		10	6.2	30	x10030062.ps
	10	5.5	10	x10010055.pc		10	6.2	35	x10035062.ps

Andere Abmessungen auf Anfrage

Autres dimensions sur demande

Further dimensions on request