




1104 REVERSE LOCKING CIRCUIT BOARD SUPPORT




Material: UL approved Nylon 66, 94V-2
Attached to chassis by #6(1/8") screw.
Sand on design to lock PCB board.

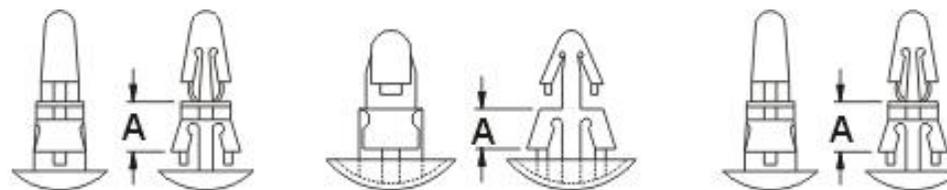

Standard design

RS-3,6B

RS-6,10,10S,12H

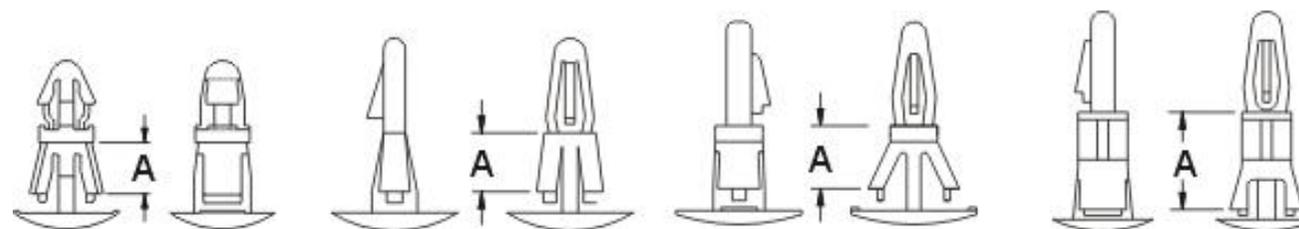

RS-6C

RS-8S

RS-6A,7A,8A

RS-10L



Unit:mm

.	Item No.	A	P.C.B		Chassis		Packing
			Hole	Thickness	Hole	Thickness	
.	<input type="checkbox"/> RS-3	3.5	4.0	1.8	5.5	1.4	100pcs
.	<input type="checkbox"/> RS-5	5.0	4.0	1.8	5.5	1.8	
	 <input type="checkbox"/> RS-5S	5.0	3.0	1.7	4.8	2.0	
.	<input type="checkbox"/> RS-6	6.1	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-6A	5.6	4.0	1.6	6.4	1.8	
.	<input type="checkbox"/> RS-6B	5.6	4.0	1.8	6.4	1.4	
	 <input type="checkbox"/> RS-6C	4.6	4.2	1.8	5.2	1.4	
.	<input type="checkbox"/> RS-6S	5.9	3.5	1.8	5.3	1.8	
.	<input type="checkbox"/> RS-7A	6.6	4.0	1.6	5.4	1.6	
.	<input type="checkbox"/> RS-8	8.0	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-8S	6.1	4.0	1.6	5.5	1.8	
.	<input type="checkbox"/> RS-10	9.8	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-10S	9.3	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-10A	9.8	4.0	1.6	5.4	1.8	
.	<input type="checkbox"/> RS-10L	9.8	4.0	1.6	5.5	1.8	
.	<input type="checkbox"/> RS-12	12.0	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-12H	12.0	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-14	14.0	4.0	1.8	5.5	1.8	
.	<input type="checkbox"/> RS-18	18.0	4.0	1.8	5.5	1.8	

Input Sample Order

[Check Selected](#) [Return All Selected](#)