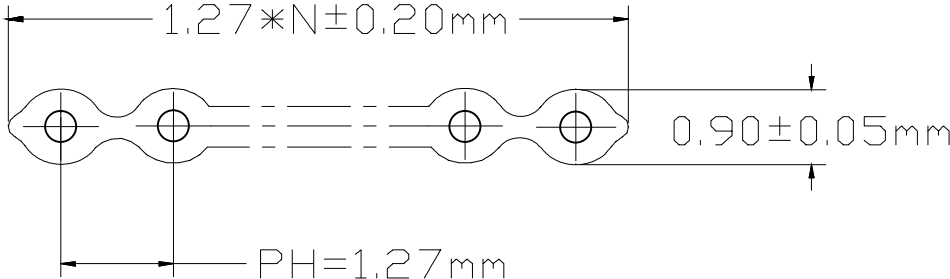





	1	2	3	4	5	6	7	8																											
A	<table><tr><th colspan="2">CONSTRUCTION ITEM</th><th>N PIN</th></tr><tr><td rowspan="3">CONDUCTOR</td><td>SIZE</td><td>28AWG</td></tr><tr><td>MATERIAL</td><td>TC</td></tr><tr><td>CONSTRUCTION</td><td>7/F 0.125±0.008mm</td></tr><tr><td rowspan="5">JACKET</td><td>AVG. THICK</td><td>0.26mm</td></tr><tr><td>MIN. THICK</td><td>0.18mm</td></tr><tr><td>MATERIAL</td><td>45P 105℃ UL-PVC All raw materials meet RoHS standards</td></tr><tr><td>DIAMETER</td><td>0.90±0.05×(N*1.27)±0.20mm PH=1.27mm</td></tr><tr><td>COLOR</td><td>GRAY#-PINK (HALF ATOMIZER)</td></tr><tr><td rowspan="2">ARKING</td><td>MARKING NO.</td><td>AWM 2651 VW-1 105℃ 300V 28AWG</td></tr><tr><td>COLOR</td><td>BLACK</td></tr></table>								CONSTRUCTION ITEM		N PIN	CONDUCTOR	SIZE	28AWG	MATERIAL	TC	CONSTRUCTION	7/F 0.125±0.008mm	JACKET	AVG. THICK	0.26mm	MIN. THICK	0.18mm	MATERIAL	45P 105℃ UL-PVC All raw materials meet RoHS standards	DIAMETER	0.90±0.05×(N*1.27)±0.20mm PH=1.27mm	COLOR	GRAY#-PINK (HALF ATOMIZER)	ARKING	MARKING NO.	AWM 2651 VW-1 105℃ 300V 28AWG	COLOR	BLACK	A
CONSTRUCTION ITEM		N PIN																																	
CONDUCTOR	SIZE	28AWG																																	
	MATERIAL	TC																																	
	CONSTRUCTION	7/F 0.125±0.008mm																																	
JACKET	AVG. THICK	0.26mm																																	
	MIN. THICK	0.18mm																																	
	MATERIAL	45P 105℃ UL-PVC All raw materials meet RoHS standards																																	
	DIAMETER	0.90±0.05×(N*1.27)±0.20mm PH=1.27mm																																	
	COLOR	GRAY#-PINK (HALF ATOMIZER)																																	
ARKING	MARKING NO.	AWM 2651 VW-1 105℃ 300V 28AWG																																	
	COLOR	BLACK																																	
B									B																										
C									C																										
D									D																										
E									E																										
F									F																										
G	ELECTRICAL CHARACTERISTICS 1. Conductor Resistance: AT 20℃ Max:28awg 237.25Ω/KM 2. Insulation Resistance: AT 20℃ Min:10MΩ/KM 3. Dielectric Strength: AC2000V 60HZ/min 4. CHARACTERISTIC Impedance: Unbalanced 100Ω Balanced 168Ω Capacitance:15.0pF/ft[49.2pF/m]8.4pF/ft[27.7pF/m] Inductance:0.15μH/ft[0.49μH/m]0.24μH/ft[0.79μH/m] Propagation Delay:1.51ns/ft[4.95ns/m]1.42ns/ft[4.66ns/m] Velocity of Propagation:68%72% RoHS Compliant HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD. <table><tr><td>APPD.</td><td>BETTY</td><td></td><td>TOLERANCE</td><td>PART NAME 品名</td></tr><tr><td>DWG.</td><td>BETTY</td><td>SCALE 参考</td><td>.0 ± .00 ± ANG. ±</td><td>FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100FEET ROHS</td></tr><tr><td>DATE</td><td>2013/07/05</td><td>UNIT M M</td><td>SIZE. A 4</td><td>PART NO.</td></tr><tr><td></td><td></td><td>PAGE 1 OF 1</td><td>REV. A</td><td>料 號 F0801-XXPAF000R</td></tr></table>								APPD.	BETTY		TOLERANCE	PART NAME 品名	DWG.	BETTY	SCALE 参考	.0 ± .00 ± ANG. ±	FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100FEET ROHS	DATE	2013/07/05	UNIT M M	SIZE. A 4	PART NO.			PAGE 1 OF 1	REV. A	料 號 F0801-XXPAF000R	G						
APPD.	BETTY		TOLERANCE	PART NAME 品名																															
DWG.	BETTY	SCALE 参考	.0 ± .00 ± ANG. ±	FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100FEET ROHS																															
DATE	2013/07/05	UNIT M M	SIZE. A 4	PART NO.																															
		PAGE 1 OF 1	REV. A	料 號 F0801-XXPAF000R																															
H									H																										
	1	2	3	4	5	6	7	8																											