


Edge Connector (Slot) 2.54mm Center Dual Position Slot

Specification:

- Contact Resistance: 30MΩ MAX.
- Contact Rating: 3 amps.
- Voltage Rating (Sea level): 1000 VAC.
- Insulation Resistance: 5000 megohms min. after exposure to humidity.
- Vibration Tolerance: 10 to 5000 hertz.
- Contact Engagement Force: 12.0 ounces average per pair with .062 (1.57) PCB.
- Humidity tolerance: 90% – 95% for 96 hours.

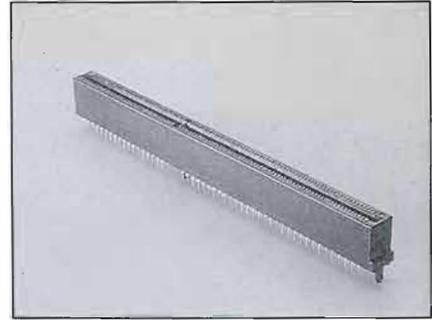

Material:

- Insulator Material: 30% glass-fiber (valox) fiber P.B.T. UL94V-0,
- Contact Material: 1. Phosphor Bronze,
2. BRASS

Mechanical

- Operating temperature: - 55°C + 0 to 105°C
- Press fit of pin in insulator body: > 15N
- Max soldering temperature: 260°C, 10 sec.
- Withdrawal force: 1.0 oz. MIN per Contact pair.
- Insertion force: 16 oz. max. per con-tact pair.

Ordering Information

m/m

PART NO.	A	B	C
SL-36	43.18	78.82	52.50
SL-62	76.20	81.60	85.54
SL-98	129.54	135.10	138.98

m/m

