
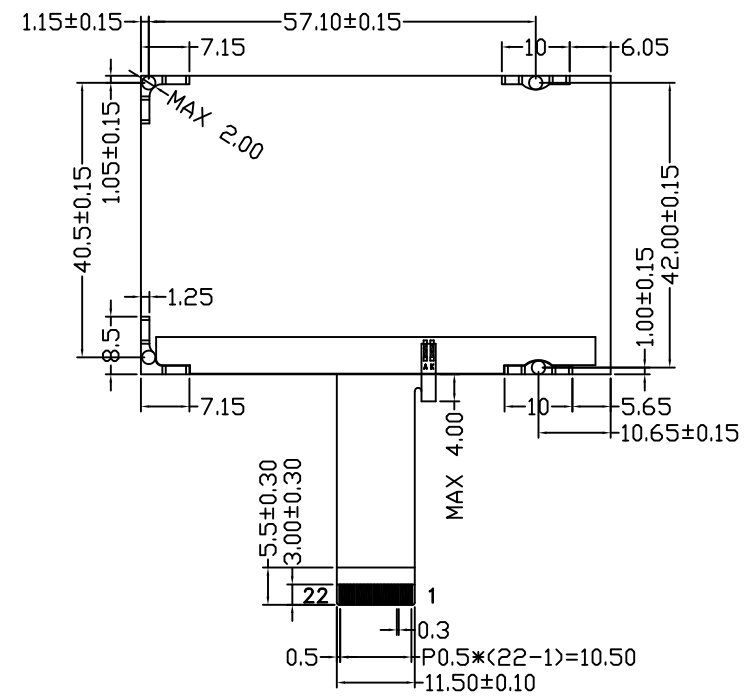
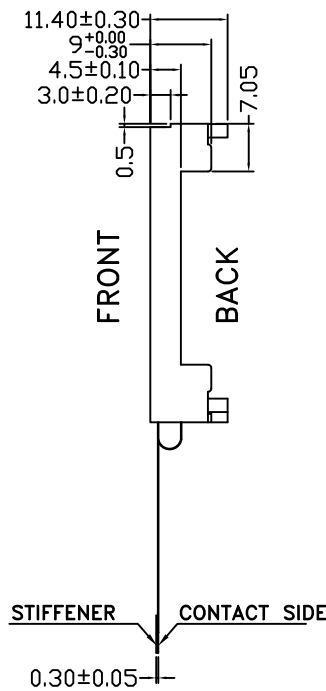


Revised Record





1.0

New issue

2014-01-18

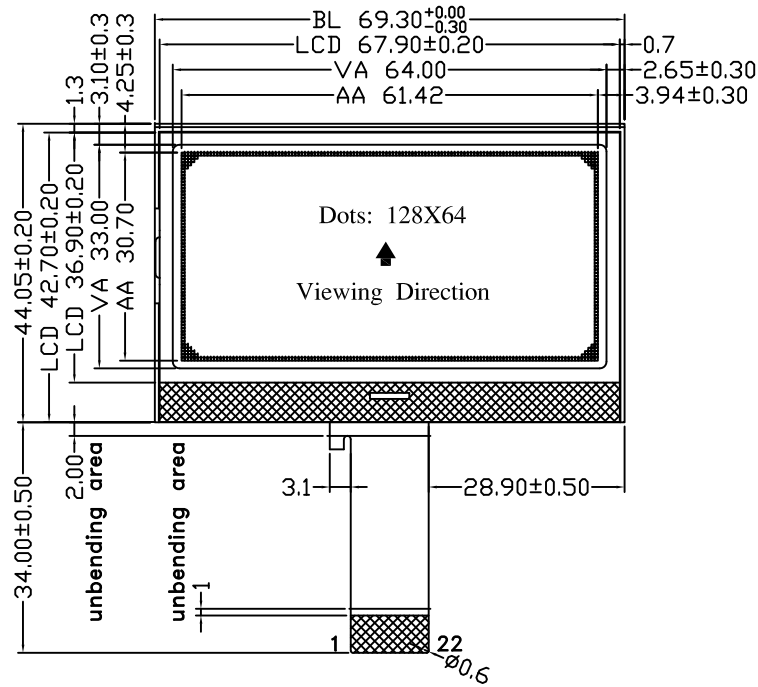

PIN	SYMBOL
1	A
2	K
3	V0
4	V4
5	V3
6	V2
7	V1
8	VOUT
9	CAP2-
10	SI(D7)
11	SCL(D6)
12	CAP2+
13	CAP4+
14	A0
15	/RES
16	/CS1
17	CAP1-
18	CAP3+
19	VDD
20	CAP1+
21	VSS
22	VSS

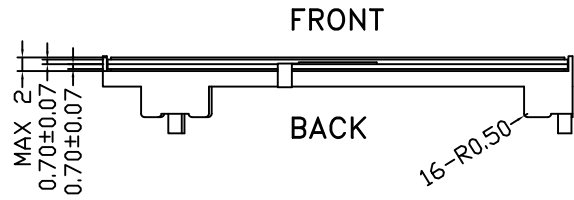

- NOTES:
- 01. DISPLAY TYPE: FSTN,GREY/POSITIVE/TRANSFLECTIVE RoHS
 - 02. OPERATING VOLTAGE: VOP=.0V,VDD=2.8V
 - 03. OPERATING TEMPERATURE: -20°C~+70°C
 - 04. STORAGE TEMPERATURE: -30°C~+80°C
 - 05. DRIVE MODE: 1/64DUTY,1/9BIAS
 - 06. VIEWING DIRECTION: 6:00
 - 07. DRIVE IC: NT7538H
 - 08. CONNECTOR: COG+FPC
 - 09. BACKLIGHT: LED(6PCS,WHITE,IF=60MA,VF=3.0V)
 - 10. CUSTOMER'S PART ID: -

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-26	BGG3663-01	VERSION: 1.0
CHECKED BY: BDT-08		PAGE 1 OF 1
APPROVED BY: BDT-01		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-01-18