


3.00mm (.118") Pitch Micro-Fit 3.0™ Wire-to-Wire Receptacle

43645
Single Row

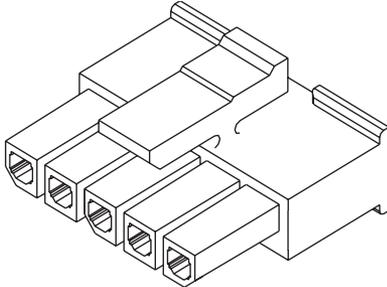

Features and Benefits

- Positive latching to mating headers or plugs
- Fully isolated contacts
- Fully polarized to mating headers and plugs
- Integral pull tabs for ease in unmating

Reference Information

Product Specification: PS-43650
Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R72040445
Mates With: 43640 and 43650
Use With: 43030
Designed In: Millimeters

Physical


Housing: Polyester, UL 94V-0

Circuits	Order No.
2	43645-0200
3	43645-0300
4	43645-0400
5	43645-0500
6	43645-0600
7	43645-0700

Circuits	Order No.
8	43645-0800
9	43645-0900
10	43645-1000
11	43645-1100
12	43645-1200

3.00mm (.118") Pitch Micro-Fit 3.0™ Wire-to-Wire Plug

43640
Single Row, with or without
Panel Mount Ears

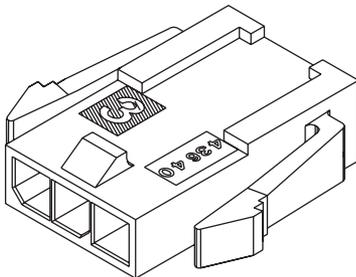

Features and Benefits

- Fully isolated contacts
- Fully polarized to mating receptacle
- Integral pull tabs for ease in unmating
- Optional panel mount ears

Reference Information

Product Specification: PS-43650
Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R72040445
Mates With: 43645
Use With: 43031
Designed In: Millimeters

Physical

Housing: Polyester, UL 94V-0

Circuits	Order No.	
	Panel Mount	Free Hanging
2	43640-0200	43640-0201
3	43640-0300	43640-0301
4	43640-0400	43640-0401
5	43640-0500	43640-0501
6	43640-0600	43640-0601
7	43640-0700	43640-0701

Circuits	Order No.	
	Panel Mount	Free Hanging
8	43640-0800	43640-0801
9	43640-0900	43640-0901
10	43640-1000	43640-1001
11	43640-1100	43640-1101
12	43640-1200	43640-1201