



Item no.: 234-503  
 Product description: PCB TERMINAL STRIP 2 SOLDER PINS / POLE 3 POLE PIN  
 SPACING 2.54 MM / 0.1 IN WITH PUSH BUTTONS FRONT-  
 ENTRY CAGE CLAMP®CONNECTION

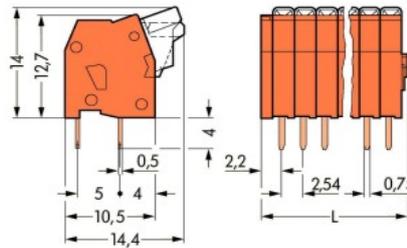

Packing unit 520 4\*130 pieces

Product group	4 (Printed Circuit)
Pin spacing from	2,54 mm
Pin spacing from	0,1 in
pole count	3
Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	0,5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	20 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	250 V
Measured shock voltage	2,5 kV
Pollution degree	2
Current intensity EN	6 A
Weight	1,53 g
Color	orange
Wiring type	Front-entry
No. of connection Points	3
No. of potentials	3
Height	14 mm
Height	0,551 in
Width	9,82 mm
Width	0,387 in

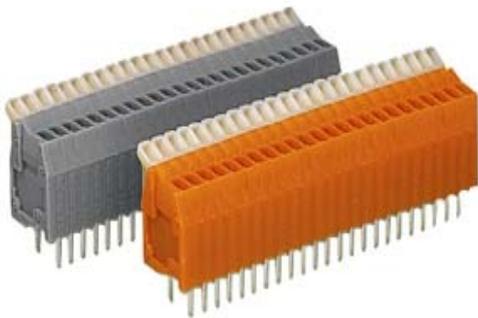

Depth	14,4 mm
Depth	0,567 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0,22 in



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
234-503	ABS	04-HG469925-PDA	250	4	0,8-0,5
234-503	BV	11915/A0	250	6	0,08-0,5
234-503	CSA	154112-1465035	150	4	28-20
234-503	DEMKO	118980ES	250	6	0,5
234-503	DEMKO	DK96-03660	250	4	0,8-0,5
234-503	DNV	E7569	250	4	0,8-0,5
234-503	GL	17296-00HH	250	4	0,8-0,5
234-503	KEMA	90.6212.01/02	250	6	0,08-0,5
234-503	NEMKO	L87192	125	4	0,5
234-503	RMR	11130002	250	4	0,8-0,5
234-503	SEMKO	9043004	250		0,5
234-503	UR	E45172	150	4	28-20

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected