

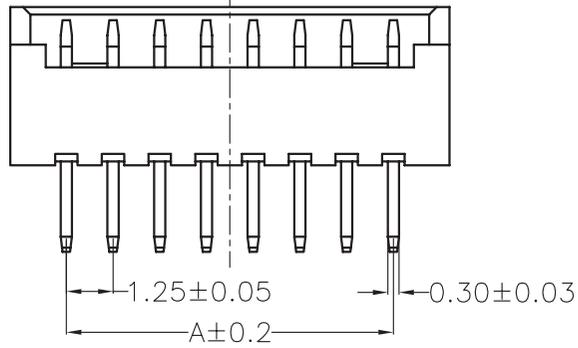




1 2 3 4 5

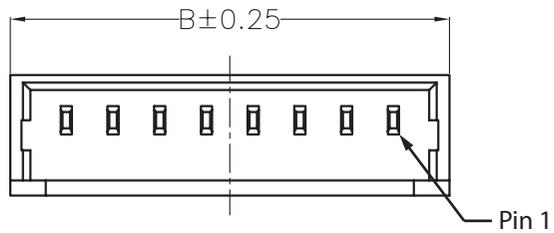

4~15P

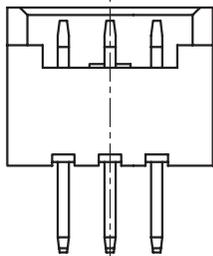

2~3P

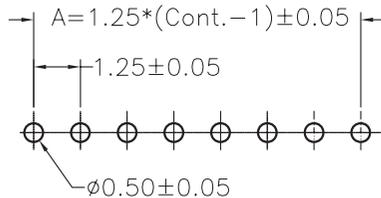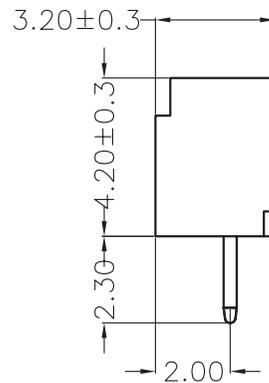

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 46
 FLAMABILITY RATING: UL94-V0
 COLOR: BEIGE
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 1.25MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 UP TO 85°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1A
 WORKING VOLTAGE: 125V AC
 INSULATOR RESISTANCE: >100 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E323964

SOLDERING
 SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
 BAG

DIMENSION
 $A = 1.25 \times (\text{NB PIN} - 1)$
 $B = 1.25 \times (\text{NB PIN}) + 1.75$

G			
F	06-AUG-13	CHARACTERISTIC	QL
E	29-OCT-12	PIN	GG
D	19-SEP-12	PIN	GG
C	17-NOV-09	STANDARD	JP
B	18-FEB-09	DRAW	JP
A	05-DEC-08	PDF	JP
REV	DATE	FILE	BY

PROJECTION:

GENERAL TOLERANCE
 .X = ± 0.2
 .XX = ± 0.15



APPROVAL: RJ

UNIT: MM
 SCALE:
 SHEET: 1/1
 DRAW: MIKE

DESCRIPTION: 1.25 MM MALE VERTICAL SHROUDED HEADER
 WERI PART NO: 6530xx114822

SIZE
A4

A

B

C

D