



Technical Data

- Contact Resistance: 30mΩ max. at DC 100mA
- Insulator Resistance: 1000MΩ min. at DC 500V
- Current Rating: 2 AMP
- Dielectric Withstanding Voltage: AC 1000V For 1 minute
- Operating Temperature: -55°C~ +105°C
- Contact: MALE Brass
FEMALE Phosphor Bronze
- Housing: PBT & 30% Glass Fiber
{ UL 94V-0 }

520 - 961 - 21



520 - 961 - 11

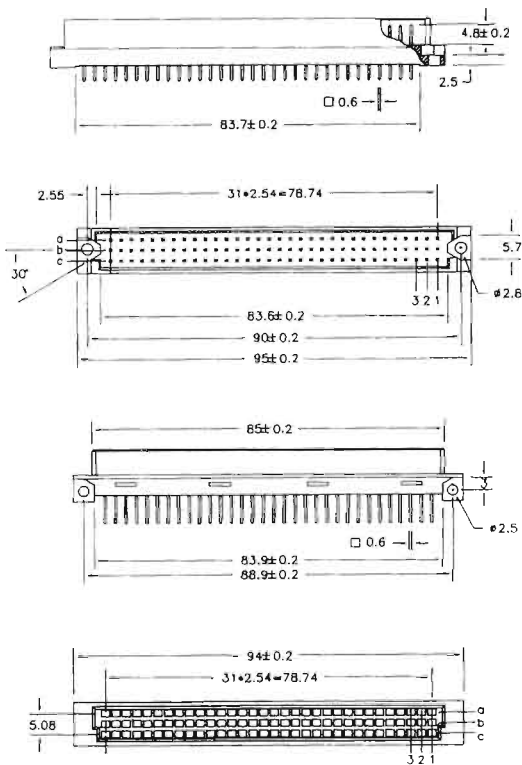

Male

All Dimensions in mm

Pitch	Position	Rows with Contacts	X lenght	l
2.54mm	96	a b c	Male	5.0mm
	64	a - c		
5.08mm	48	a b c	Female	2.9mm
	32	a - c		

Female

How TO Order**DIN 41612 3 Row R Type**