





SERIES 374



374-031-14

Terminal Blocks For PC-Boards Machined Type Insert

Front Wire Inlet Type - Screw On Top
Spacing 5.08mm or 10.16mm
Height Over PC-Board 12.5mm

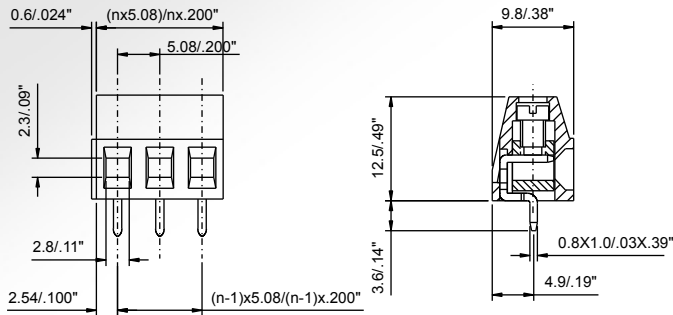

Recommended P.C.B. Holes
diameter : \varnothing 1.2mm to \varnothing 1.4mm
n= number of contacts

** To avoid accumulated tolerance-variations of Terminal-Blocks to PC-Board spacing, limit the number of contacts to not more than 24 contacts per row.



374-031-14



Technical Data

Material

- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromated
- Surface of solder tail: Tin plated
- Insulator body: Poly Butylene Terephthlene, PBT (30% Glass filled) (UL 94 V-0)

Electrical

- Current rating: 20 Amp
- Resistance to tracking: 5M Ω
- Dielectric strength: 2500V
- Insulation withstands voltage: AC 1500V/Min
- Rated voltage: 300V
- Conductor size: 0.5 to 4mm²
- AWG: 22 - 14

Mechanical

- Operating temperature: -30°C to +120°C
- Short time peak temperature: +200°C max

HOW TO ORDER :

