

PLCC Sockets

F3611 = Product group; Product group discount F 36 1_

PLCC Sockets Series: PLCC_Z

Features
• RoHS compliant

Technical Specifications

Insulator:Thermoplastic
Glass-filled, UL94V-0
 Contact Material:Phosphor Bronze
 Contact Surface:2µ Nickel, 3µ Tin
 Operating Current:1A
 Electrical Strength:500V AC/1 Min.
 Insulation Resistance, Min.:>1000MΩ
 Contact Resistance, Max.:30mΩ
 Temperature Range:-55...+110°C

Dimensions


PLCC_	Pole	A [mm]	B [mm]	C [mm]	D [mm]
20Z	20	5,08	15,58	18,30	10,16
28Z	28	7,62	18,12	21,86	12,70
32Z	32	7,62	15,50	25,70	12,70
44Z	44	12,70	22,80	29,00	17,78
52Z	52	15,24	26,92	32,57	20,32
68Z	68	20,32	32,00	39,70	25,40
84Z	84	25,40	37,10	46,90	30,48

Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various

Part Nr.	Part description	PU	10 up.	50 up.	200 up.
PLCC20Z	PLCC Socket 20Pole Sn PKU=37	H	48,80	36,60	30,50
PLCC28Z	PLCC Socket 28Pole Sn PKU=32	H	48,05	36,05	30,05
PLCC32Z	PLCC Socket 32Pole Sn PKU=28	H	51,95	38,95	32,45
PLCC44Z	PLCC Socket 44Pole Sn PKU=24	H	58,05	43,55	36,30
PLCC52Z	PLCC Socket 52Pole Sn PKU=22	H	61,25	45,95	38,30
PLCC68Z	PLCC Socket 68Pole Sn PKU=18	H	70,80	53,10	44,25
PLCC84Z	PLCC Socket 84Pole Sn PKU=16	H	82,70	62,00	51,65

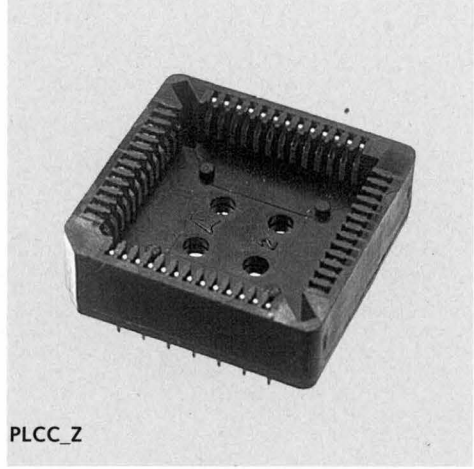

PLCC_Z

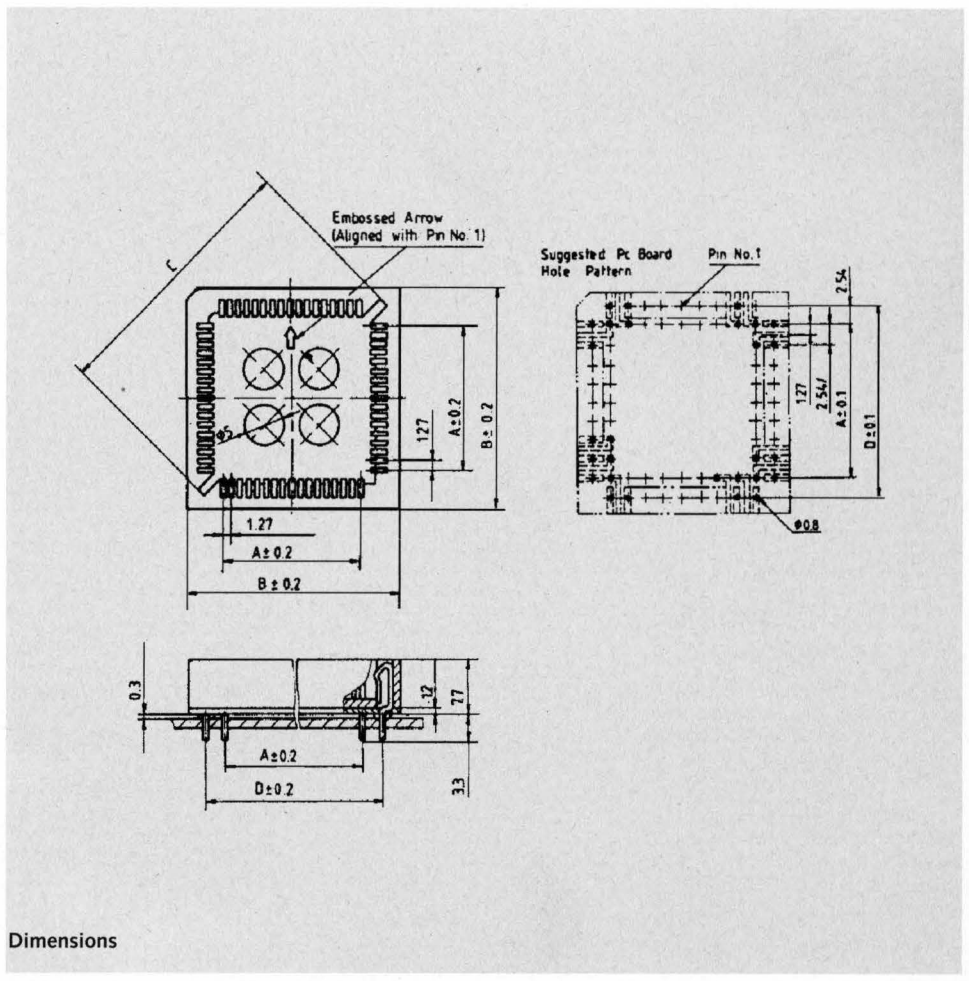

Dimensions