

Metal Oxide Resistors, Standard



FEATURES

- Rugged metal oxide film
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)
- High power dissipation
- High temperature coating
- Used in applications with high endurance demands



STANDARD ELECTRICAL SPECIFICATIONS						
MODEL	POWER RATING $P_{70^{\circ}C}$ W	LIMITING ELEMENT VOLTAGE MAX. V_{\cong}	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
SXA0411	0.7	\sqrt{PxR}	300	± 2 ± 5	1R0 - 9R53 R16 - 9R53	48 24
SXA0411	1.0	-	300	± 2 ± 5	10R - 100K 10R - 100K	48 24
SXA0617	1.5	\sqrt{PxR}	300	± 2 ± 5	1R0 - 9R53 R16 - 9R53	48 24
SXA0617	2.0	-	300	± 2 ± 5	10R - 100K 10R - 100K	48 24
SXA0922	4.0	500	300	± 2 ± 5	10R - 68K 5R1 - 68K	48 24
SXA0933	6.0	600	300	± 2 ± 5	10R - 68K 6R2 - 68K	48 24

- TC 200ppm/°C on request
 - Coating: grey
 - Marking: SXA0411 and SXA0617 color code (no TC band); SXA0922 and SXA0933 print marked.
- For further information on marking, please see appropriate catalog or web page

PART NUMBER AND PRODUCT DESCRIPTION

PART NUMBER: SXA0411081802GDE


S	X	A	0	4	1	1	0	8	1	8	0	2	G	D	E		
MODEL	SIZE	SPECIAL CHARACTER	TC	VALUE	TOLERANCE	PACKING	SPECIAL										
SKA	0411 0617 0922 0933	0 = Neutral	8 = ± 300 ppm/K	3 digit value 1 digit multiplier MULTIPLIER 7 = 10^{-3} 8 = 10^{-2} 9 = 10^{-1} 0 = 10^0 1 = 10^1 2 = 10^2 3 = 10^3 4 = 10^4 5 = 10^5 6 = 10^6	G = ± 2 % J = ± 5 %	21 = A1 (G53) 41 = A1 (G73) 2C = AC 2B = AB DE = RE (G53) FE = RE (G73) H1 = R1 DC = RC	up to 2 digits 00 = Standard										

PRODUCT DESCRIPTION: SXA0411 300 18K 2% RE53

SXA0411	300	18K	2%	RE53
MODEL	TC	RESISTANCE VALUE	TOLERANCE	PACKING ¹⁾
SXA0411 SXA0617 SXA0922 SXA0933	± 300 ppm/K	49K9 = 49.9 K Ω 50R1 = 50.1 Ω	± 2 % ± 5 %	A1G53 A1G73 AC AB REG53 REG73 R1 RC

¹⁾ Please refer to table PACKING, page 2.

NOTE: Products can be ordered using either the Product Description or the Part Number.

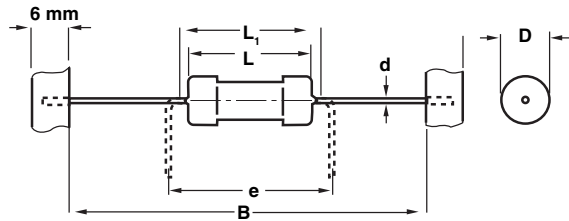DIMENSIONS


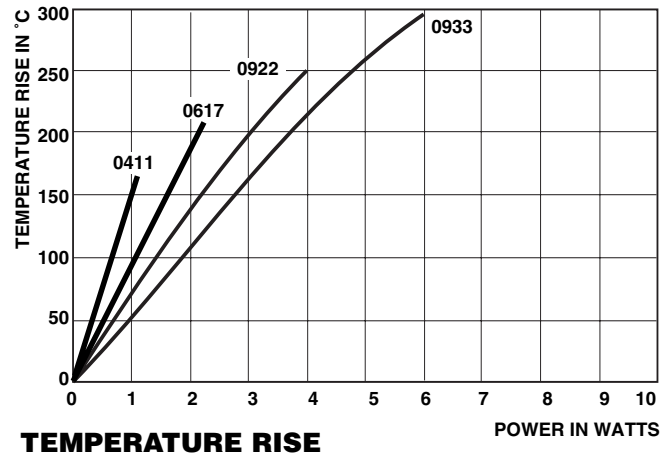
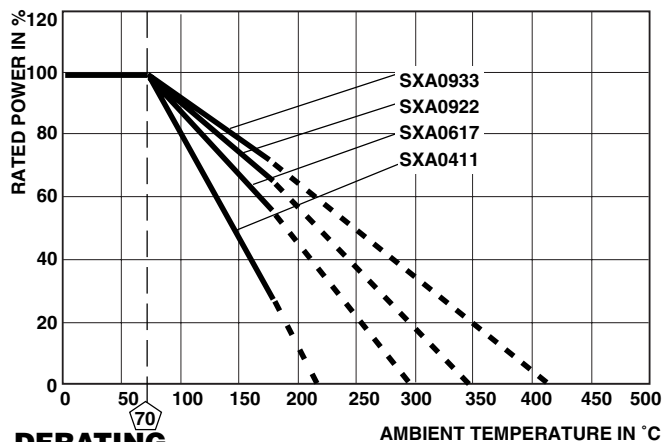
MODEL	DIMENSIONS [in millimeters]					
	D	L	L _{1max}	B	d	e
SXA0411	3.8 ^{-0.4}	11.0 ^{-0.6}	14.0	73 ± 1 ¹⁾	0.7	12.5
SXA0617	5.2 ^{-0.5}	15.8 ^{-0.8}	19.8	83 ± 1 ¹⁾	0.8	17.5
SXA0922	8.4 ^{-0.6}	22.2 ^{-0.9}	26.2	83 ± 1	0.8	25.0
SXA0933	8.4 ^{-0.6}	32.2 ^{-0.9}	36.2	83 ± 1	0.8	35.0

- Taping in acc. with IEC60286-1
- D and L measured in acc. with IEC60294
- d according to IEC60301






¹⁾ Also available in 53mm tape



TECHNICAL SPECIFICATIONS									
PARAMETER	UNIT	SXA0411		SXA0617		SXA0922		SXA0933	
Rated Dissipation at 70°C	W	0.7	1	1.5	2	4		6	
Limiting Element Voltage ¹⁾	V _≅	≤ 350		≤ 500		≤ 500		≤ 600	
Insulation Voltage (1 min)	V _{eff}	> 600		> 600		> 600		> 600	
Thermal Resistance	K/W	≤ 150		≤ 110		≤ 70		≤ 60	
Insulation Resistance	Ω	≥ 10 ¹¹							
Category Temperature Range	°C	-55 to +175							
Terminal Strength, axial	N	> 60		> 80		> 80		> 80	
Failure Rated	10 ⁻⁸ /h	< 3							
Weight	g	0.52		1.1		3.2		4.2	

¹⁾ Rated voltage $\sqrt{P \times R}$



PACKING						
MODEL	REEL			BOX		
	PIECES / REEL	CODE	MIN. ORDER QTY PACKING UNITS	PIECES / BOX	CODE	MIN. ORDER QTY PACKING UNITS
SXA0411	2 500	RE	1	1 000	A1	1
SXA0617	1 000	R1	2	500	AC	2
SXA0922	500	RC	2	250	AB	4
SXA0933	500	RC	2	250	AB	4

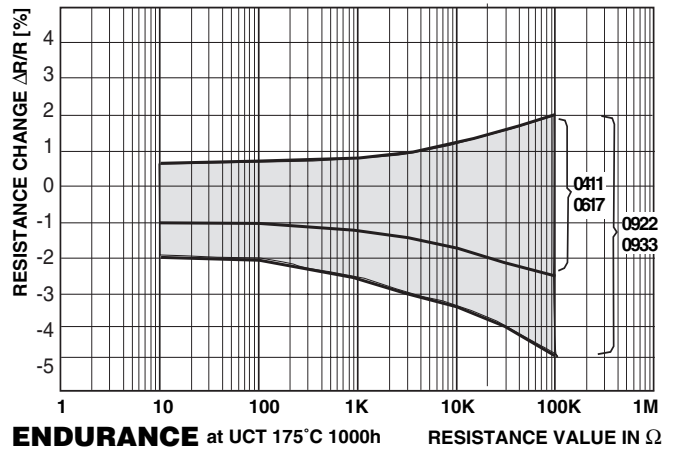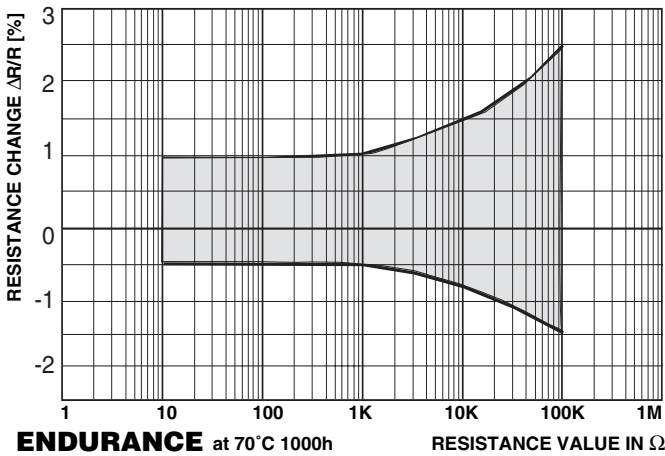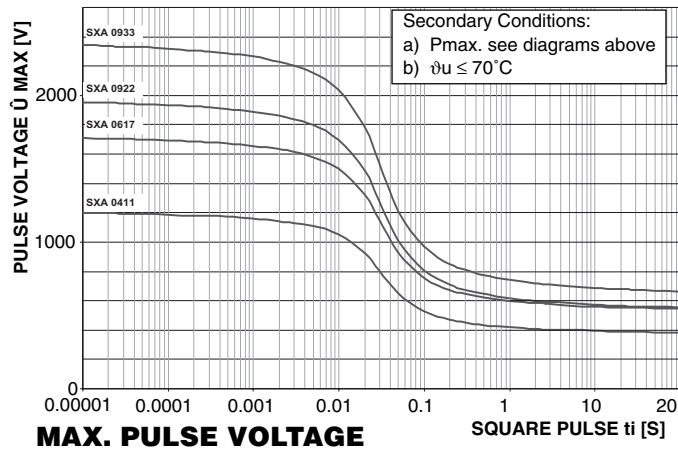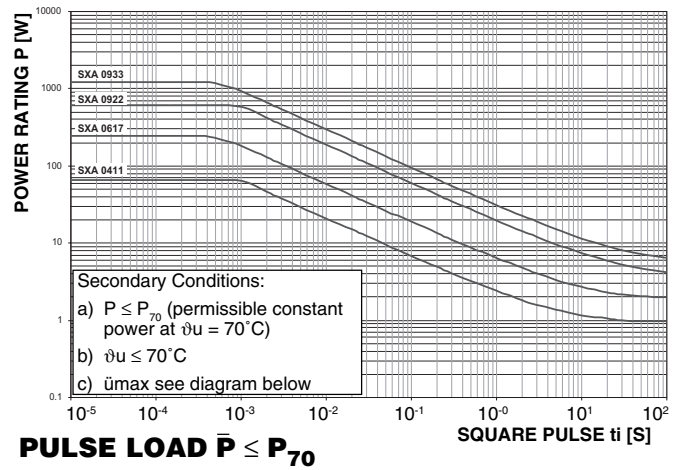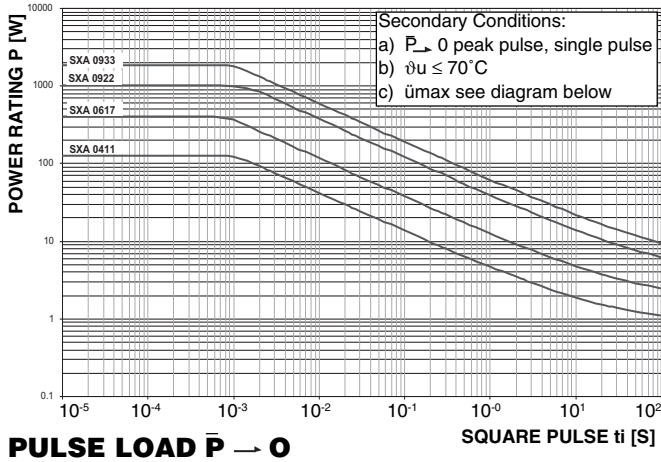

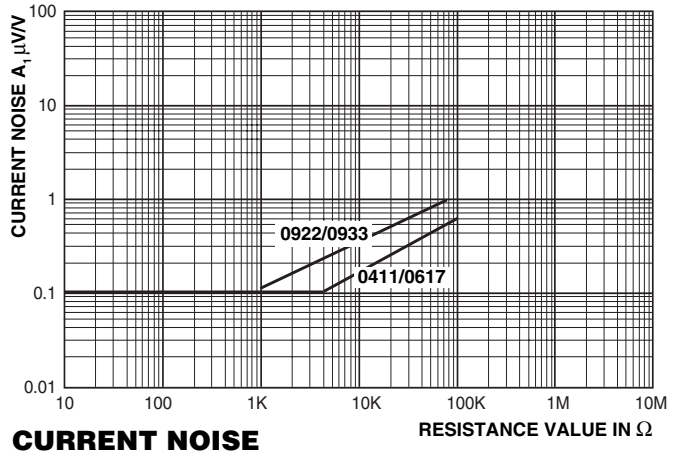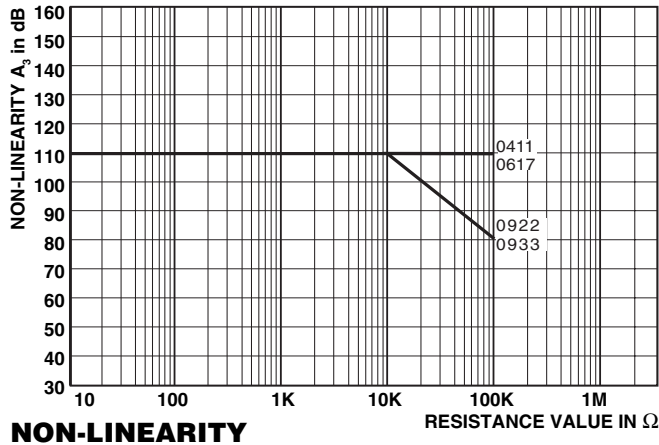

PERFORMANCE			
TEST	CONDITIONS OF TEST	REQUIREMENTS¹⁾	
		0411/0617	0922/0933
Endurance at 70°C IEC 60115-1 4.25.1	1000 hours at 70°C 1.5 hours "ON", 0.5 hours "OFF" 8000 hours at 70°C 1.5 hours "ON", 0.5 hours "OFF"	≤ ± 2.5% ≤ ± 5.0%	≤ ± 5.0% ≤ ± 10%
Endurance at UCT IEC60115-1 4.25.3	1000 hours at 175°C without load 8000 hours at 175°C without load	≤ ± 2.5% ≤ ± 5.0%	
Overload Test IEC 60115-1 4.13	Short time overload at 2.5 x rated power or twice the limiting voltage for 5 seconds	≤ ± 0.5%	
Thermal Shock IEC 60115-1 4.19 IEC60068-2-14	Rapid change between upper and lower category temperature	≤ ± 0.5%	
Climatic Sequence IEC 60115-1 4.23	Dry heat, damp heat cyclic, cold, low air pressure	≤ ± 1.0%	
Damp Heat Steady State IEC60115-1 4.18 IEC 60068-2-3	56 days at 40°C and 93% relative humidity and U = 0.1 x rated power	≤ ± 1.0%	
Resistance to Soldering Heat IEC 60115-1 4.18 IEC60068-2-20	10 seconds at 260°C solder bath temperature	≤ ± 0.25%	
Robustness of Terminations IEC 60115-1 4.16	Tensile, bending and torsion	≤ ± 0.25%	
Vibration IEC 60115-1 4.22	0.75mm or 10g, 10Hz - 500Hz	≤ ± 0.25%	

¹⁾ For a resistance range from 10Ω to 100KΩ

APPLICABLE SPECIFICATIONS
<ul style="list-style-type: none"> • CECC40000 • EN 140000 / IEC 60115-1



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.