






A Phoenix Mecano Company

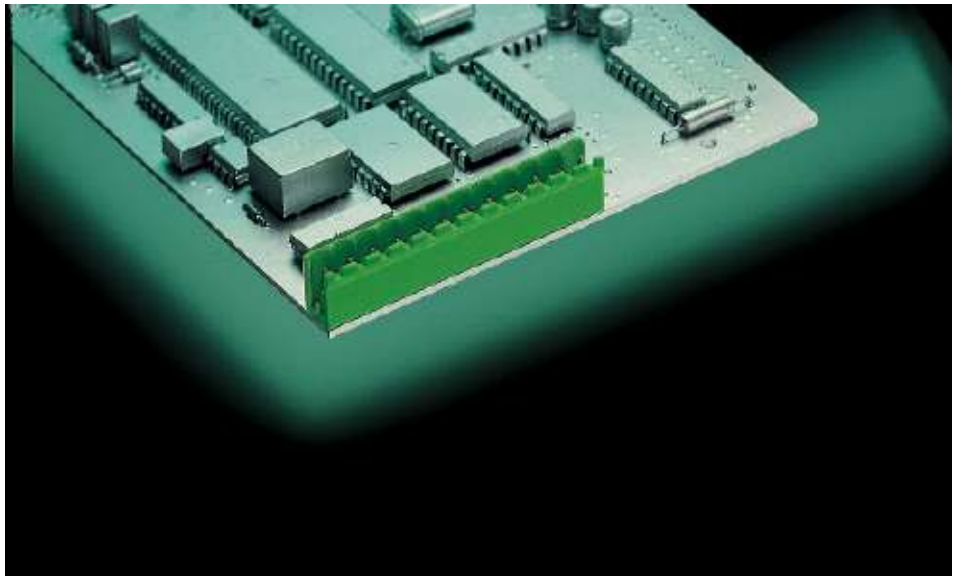

STL(Z)950/...-5.0(5.08)-V-GREEN

2-24 poles, spacing 5,0 mm or 5,08 mm

Insert required no. of poles ..

Ratings:		
		
Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overtoltage Category		III
Rating Impulse Voltage / Dirtlevel		4 kV / 3
Dimensions		
Spacing		5 mm (5,08 mm)
PCB hole diameter		1,4 mm
Materials		
Insulating Material		PA
Flammability Class		UL94 V-0
Temperature Range		-30°C/105°C
Contact pin		Cu
Colour		
GREEN		RAL 6018

