
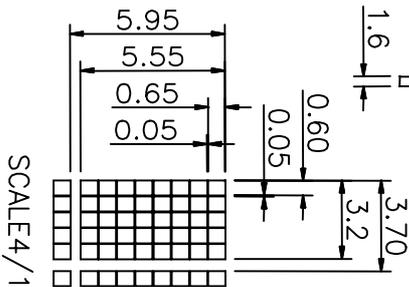
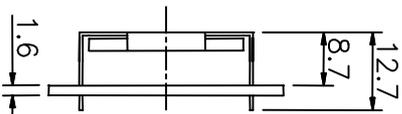
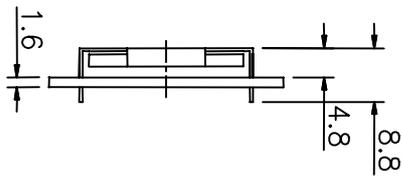


GENERAL SPECIFICATION

ITEM	DESCRIPTION				
Product No	SC2402ASLB-XH-HS				
LCD Type	<input checked="" type="checkbox"/> STN Gray Positive	<input type="checkbox"/> STN Yellow Green Positive	<input type="checkbox"/> STN Blue Negative		
	<input type="checkbox"/> TN Negative		<input type="checkbox"/> TN Positive		
	<input type="checkbox"/> FSTN Negative White & Black		<input type="checkbox"/> FSTN Positive Black & White		
Rear Polarizer	<input type="checkbox"/> Reflective		<input checked="" type="checkbox"/> Transflective		<input type="checkbox"/> Transmissive
Backlight Type	<input type="checkbox"/> NO B/L	<input checked="" type="checkbox"/> LED		<input type="checkbox"/> CCFL	<input type="checkbox"/> EL
Backlight Color	<input checked="" type="checkbox"/> Yellow Green	<input type="checkbox"/> Green	<input type="checkbox"/> Amber	<input type="checkbox"/> White	<input type="checkbox"/> Other
View Direction	<input checked="" type="checkbox"/> 6 O'clock			<input type="checkbox"/> 12 O'clock	
Temperature Range	<input type="checkbox"/> Normal			<input checked="" type="checkbox"/> Wide	
Frame	<input type="checkbox"/> Black			<input checked="" type="checkbox"/> Silver	

TO BE VERY CAREFUL !

The LCD driver ICs are made by CMOS process, which are very easy to be damaged by static charge, make sure the user is grounded when handling the LCM.

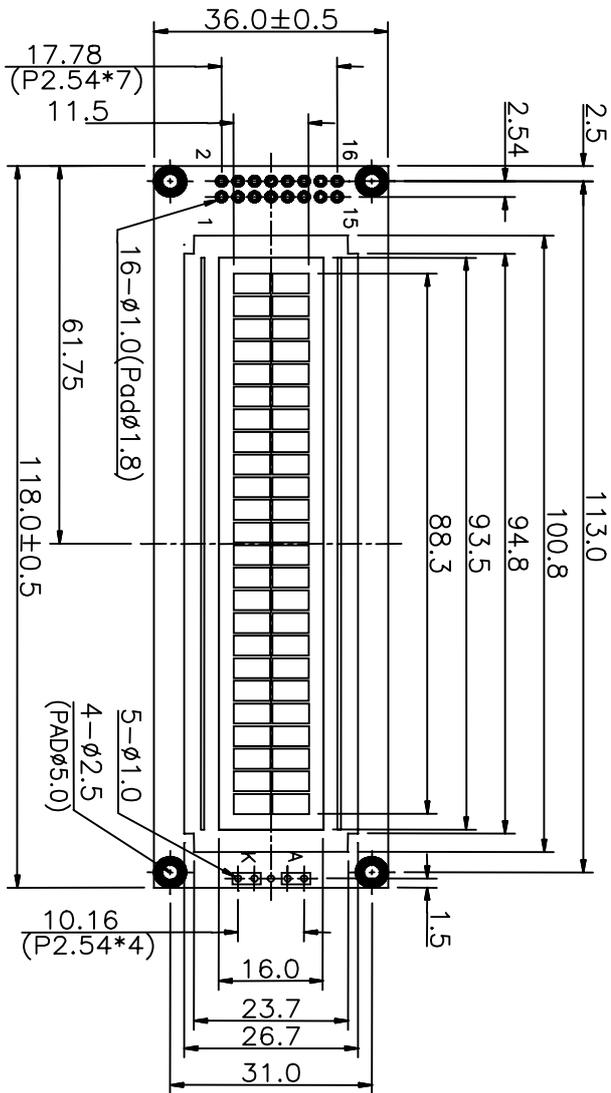

SCALE 4/1

1. VSS	5. R/W	9. DB2	13. DB6
2. VDD	6. E	10. DB3	14. DB7
3. VO	7. DB0	11. DB4	15. A
4. RS	8. DB1	12. DB5	16. K

Unless Classified : The Tolerance ± 0.3 mm

CUSTOMER APVL	DATE	SCALE	DATE	TITLE	REV
DWN Karim	2000.12.01	1		MODULE	0
CHKD H S U	DATE	UNIT			
APVD	DATE	mm		MODEL	
				SC2402A	
SUNLIKE DISPLAY			DWG NO	PAGE	
			SC-0027	1/1	

ABSOLUTE MAXIMUM RATING

(1) Electrical Absolute Ratings

Item	Symbol	Min.	Max.	Unit	Note
Power Supply for Logic	$V_{DD}-V_{SS}$	-0.3	7.0	Volt	
Power Supply for LCD	$V_{DD}-V_O$	-0.3	12.0	Volt	
Input Voltage	V_I	-0.3	V_{DD}	Volt	
LED Power Dissipation	P_{AD}	-	1.2	W	
LED Forward current	I_{AF}	-	225	mA	
LED Reverse Voltage	V_R	-	8	V	

(2) Environmental Absolute Maximum Ratings

Item	Normal Temperature				Wide Temperature			
	Operating		Storage		Operating		Storage	
	Min.,	Max.	Min.,	Max.	Min.,	Max.	Min.,	Max.
Ambient Temperature	0°C	+50°C	-20°C	+70°C	-20°C	+70°C	-30°C	+80°C
Humidity(without condensation)	Note 2,4		Note 3,5		Note 4,5		Note 4,6	

Note 2 $T_a \leq 50^\circ\text{C}$: 80% RH max

$T_a > 50^\circ\text{C}$: Absolute humidity must be lower than the humidity of 85%RH at 50°C

Note 3 T_a at -20°C will be <48hrs at 70°C will be <120hrs when humidity is higher than 70%.

Note 4 Background color changes slightly depending on ambient temperature. This phenomenon is reversible.

Note 5 $T_a \leq 70^\circ\text{C}$: 75RH max

$T_a > 70^\circ\text{C}$: absolute humidity must be lower than the humidity of 75%RH at 70°C

Note 6 T_a at -30°C will be <48hrs, at 80°C will be <120hrs when humidity is higher than 70%.

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typ	Max.	Unit	note
Power Supply for Logic	$V_{DD}-V_{SS}$	-	4.5	5.0	5.5	Volt	
Input Voltage	V_{IL}	L level	0	-	0.6	Volt	
	V_{IH}	H level	2.2	-	V_{DD}	Volt	
LCM Recommend LCD Module Driving Voltage	$V_{DD}-V_O$	$T_a=0^{\circ}C$	-	-	-	Volt	
		$T_a=25^{\circ}C$	4.2	4.5	4.8		
		$T_a=50^{\circ}C$	-	-	-		
Power Supply Current for LCM	I_{DD}	$V_{DD}=5.0V$ $V_{DD}-V_O=4.5V$	-	2.0	3.0	mA	
LED Forward Voltage	V_F	$I_f=150\text{ mA}$	-	4.2	4.6	Volt	
LED Forward Current	I_F	-	-	150	-	mA	
LED Reverse Current	I_R	$V_R=8V$	-	-	0.2	mA	

OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typ	Max.	Unit	note	
Viewing angle range	$\Phi_f(12\text{ o'clock})$	When $Cr \geq 1.4$	-	10	-	Degree	9,10	
	$\Phi_b(6\text{ o'clock})$		-	30	-			
	$\Phi_l(9\text{ o'clock})$		-	30	-			
	$\Phi_r(3\text{ o'clock})$		-	30	-			
Rise Time	T_r	$V_{DD}-V_O=4.5V$ $T_a=25^{\circ}C$	-	200		mS		
Fall Time	T_f		-	250				
Frame frequency	F_{rm}		-	64	-	Hz		8,10
Contrast	Cr		-	3.0	-			7
The Brightness Of Backlight	L	$I_f=150\text{ mA}$	100	120	-	cd/m^2		
Peak Emission Wavelength	λ_P		-	570	-	nm		


MECHANICAL SPECIFICATION

ITEM	DESCRIPTION
Product No.	SC2402A
Module Size	118.0(W)×36.0(H)×8.8(LED=12.7) max(D)
View Area	93.5(W)mm×16.0mm(H)
Dot Size	0.60 (W)mm×0.65(H)mm
Dot Pitch	0.65(W)mm×0.70(H)mm
Display Format	24 characters (W)×2 lines (H)
Duty Ratio	1/16 Duty
Controller	KS0066 or Equivalent


INTERFACE PIN ASSIGNMENT

Pin No.	Pin Out	Level	Description
1	VSS	0V	Power Supply Ground
2	VDD	5V	Power Supply Voltage
3	Vo	---	Contrast Adj
4	RS	H/L	Register Select
5	R/W	H/L	Read / Write
6	E	H,H→L	Enable Signal
7	DB0	H/L	Data Bit 0
8	DB1	H/L	Data Bit 1
9	DB2	H/L	Data Bit 2
10	DB3	H/L	Data Bit 3
11	DB4	H/L	Data Bit 4
12	DB5	H/L	Data Bit 5
13	DB6	H/L	Data Bit 6
14	DB7	H/L	Data Bit 7
15	A	4.2V	LED Power Supply (+)
16	K	0V	LED Power Supply (-)

[Note 7] Definition of Operation Voltage (Vop)

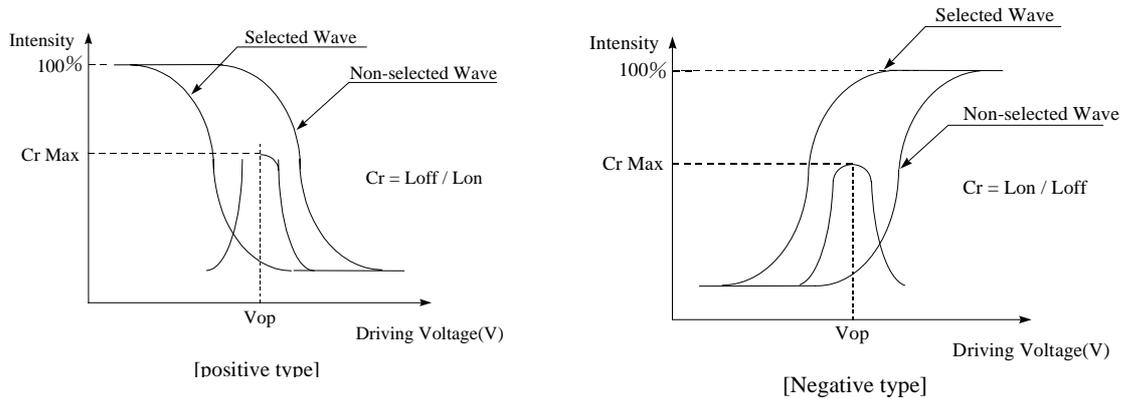

[Note 8] Definition of Response Time (Tr, Tf)

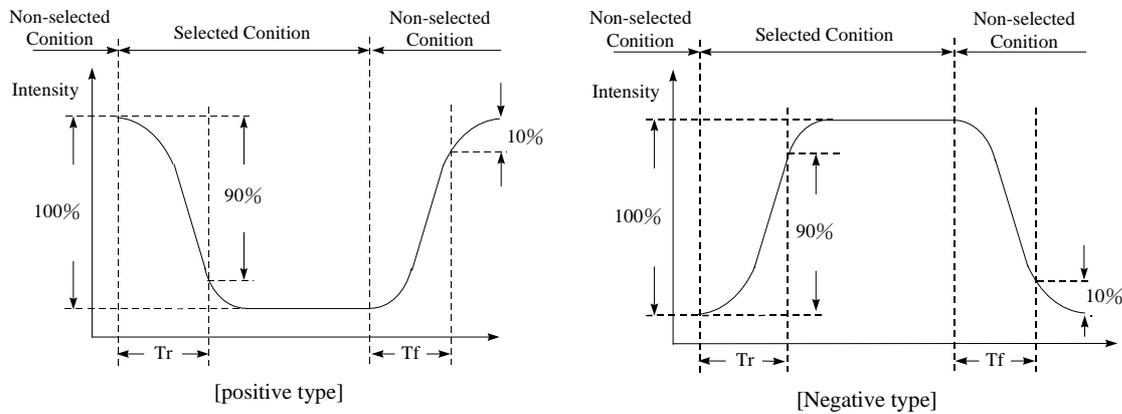

Conditions:


Operating Voltage : Vop

Frame Frequency : 64 Hz



Viewing Angle (θ, φ): $0^\circ, 0^\circ$

Driving Wave form : 1/N duty, 1/a bias


[Note 9] Definition of Viewing Direction

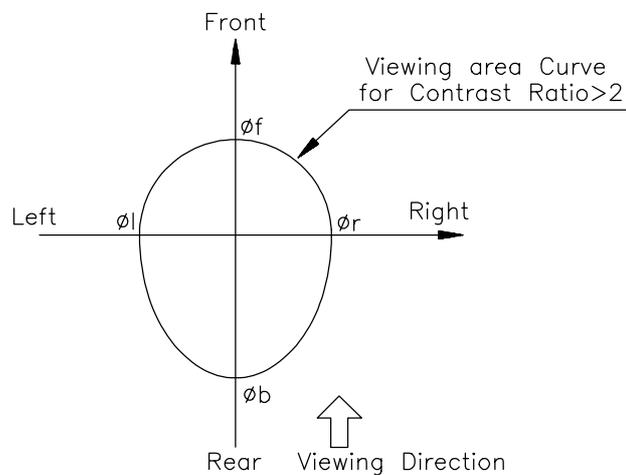


[Note 10] Definition of viewing angle

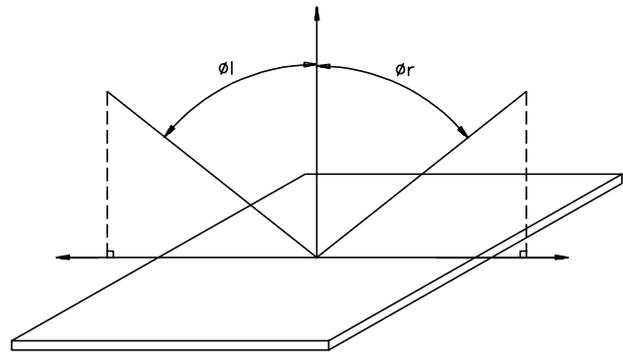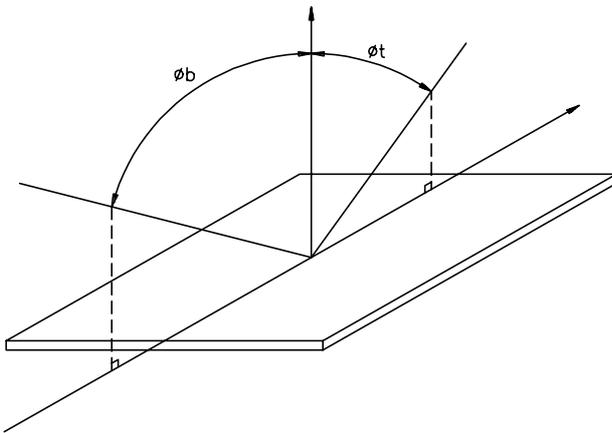

[Note 11] Description of Measuring Equipment

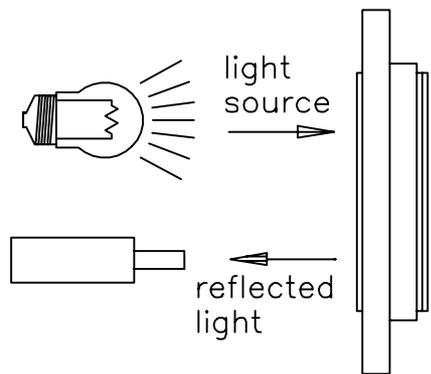


Reflective type

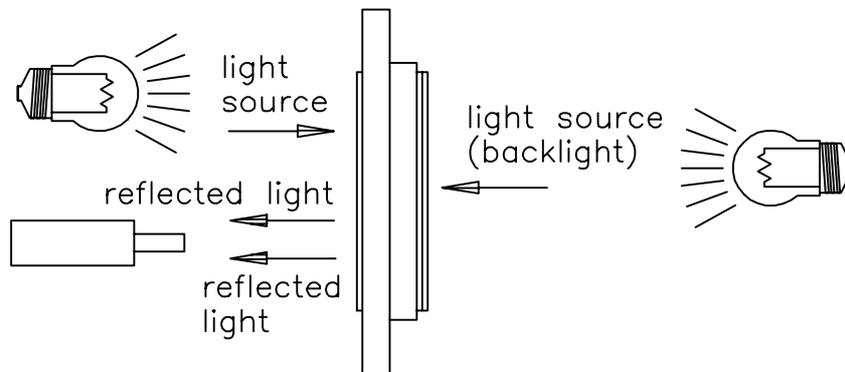

Transflective type

BLOCK DIAGRAM

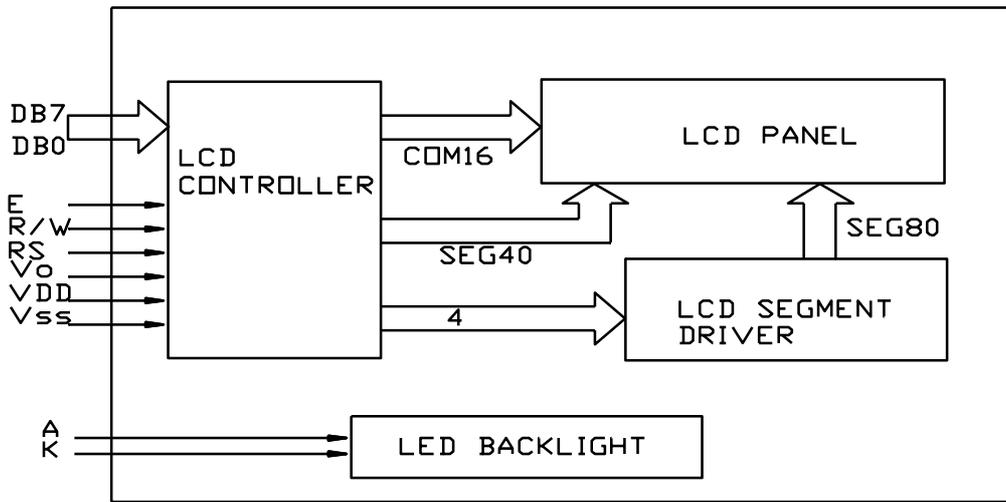

POWER SUPPLY

