


4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5566

Vertical, Dual Row
Without Pegs, without Drain Holes



Features and Benefits

- Positive housing locks to mate with Mini-Fit Jr. receptacle
- Fully isolated terminals to protect contacts from damage
- Drain hole option available, contact Molex

Reference Information

Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacles
PCB Thickness: 1.60mm (.062")
Process: Wave solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass or Phosphor Bronze
Plating: Tin
Underplating: Copper
Operating Temperature: -40 to +105°C


Circuits	Order No.		Lead-free
	94V-2	94V-0	
2	39-28-1023	39-28-8020	Yes
4	39-28-1043	39-28-8040	
6	39-28-1063	39-28-8060	
8	39-28-1083	39-28-8080	
10	39-28-1103	39-28-8100	
12	39-28-1123	39-28-8120	

Circuits	Order No.		Lead-free
	94V-2	94V-0	
14	39-28-1143	39-28-8140	Yes
16	39-28-1163	39-28-8160	
18	39-28-1183	39-28-8180	
20	39-28-1203	39-28-8200	
22	39-28-1223	39-28-8220	
24	39-28-1243	39-28-8240	

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5569

Right Angle, Dual Row with Pegs

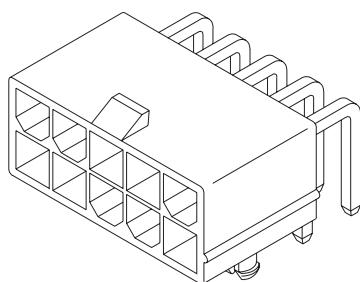

Features and Benefits

- Board mounting pegs provide polarization during placement on PCB and increased board retention during solder processing
- Low profile for space constraints
- Positive housing locks
- Fully isolated terminals to protect contacts from damage

Reference Information

Packaging: Tray
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacles
PCB Thickness: 1.60mm (.062")
Process: Wave Solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A
45750	12.0A	12.0A	12.0A	11.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass
Plating: Tin or Select Gold
Underplating: Nickel
Operating Temperature: -40 to +105°C

Circuits	Order No.				Lead-free
	Tin Plated		Select Gold Plated (30µ")		
	94V-2	94V-0	94V-2	94V-0	
2	39-30-7025	39-30-7026	39-30-0023	39-30-0024	Yes
4	39-30-7045	39-30-7046	39-30-0043	39-30-0044	
6	39-30-7065	39-30-7066	39-30-0063	39-30-0064	
8	39-30-7085	39-30-7086	39-30-0083	39-30-0084	
10	39-30-7105	39-30-7106	39-30-0103	39-30-0104	
12	39-30-7125	39-30-7126	39-30-0123	39-30-0124	
14	39-30-7145	39-30-7146	39-30-0143	39-30-0144	
16	39-30-7165	39-30-7166	39-30-0163	39-30-0164	
18	39-30-7185		39-30-0183		
20	39-30-7205	39-30-7206	39-30-0203	39-30-0204	
22	39-30-7225				
24	39-30-7245	39-30-7246	39-30-0243	39-30-0244	