
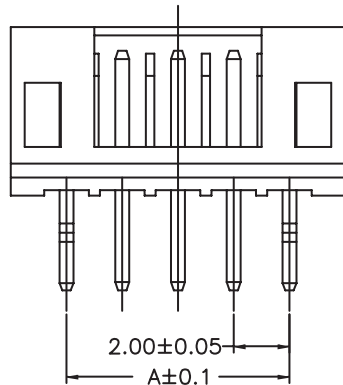
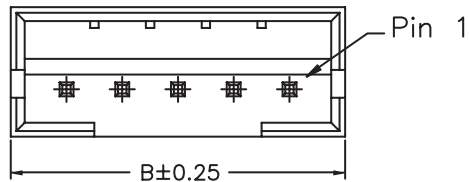


PCB LAYOUT - COMPONENT VIEW

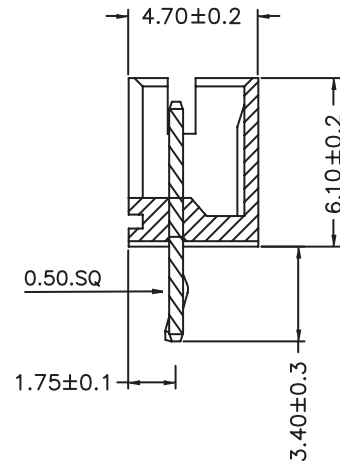

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 46
FLAMABILITY RATING: UL94-V0
COLOR: BEIGE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
CURRENT RATING: 2A
WORKING VOLTAGE: 125V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
 CERTIFIED: E323964

SOLDERING
SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
BAG

DIMENSION
A = 2.00 x (NB PIN - 1)
B = 2.00 x (NB PIN - 1) + 4.00

				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15	 WÜRTH ELEKTRONIK		D
G								
F	06-AUG-13	CHARACTERISTIC	QL					
E	28-DEC-12	COLOR	JC					
D	18-JUL-12	MATERIAL & DIM	QL	APPROVAL: RJ		DESCRIPTION: 2.00 MM MALE VERTICAL SHROUDED HEADER		SIZE A4
C	17-NOV-09	STANDARD	JP		UNIT: MM			
B	11-AUG-09	DIMENSIONS	JP		SCALE:	WERI PART NO: 6200xx11622		
A	07-NOV-08	PDF	JP		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:			