
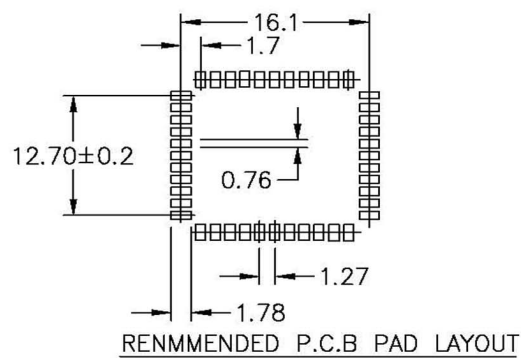
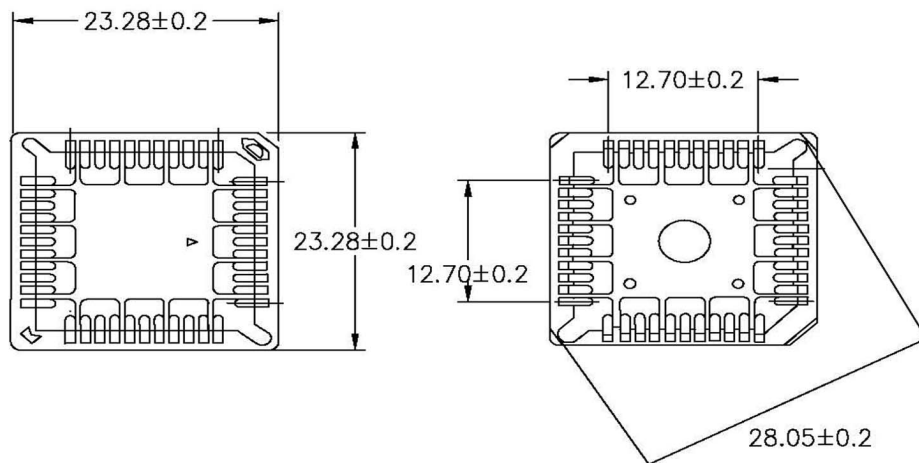


Insulator Material:PPS&40% Glase Fiber(UL 94V-0)
 Contact Resistance:30MΩ MAX at Dc 100ma
 Insulator Resistance:1000M Ω Min at Dc 500V
 Current Rating:1AMP
 Dielectric wuthstanding voltage:Ac 500V for 1 minute
 Temperature Rating: -55 C ~+105C
 Contact Material:Phosphor Bronze

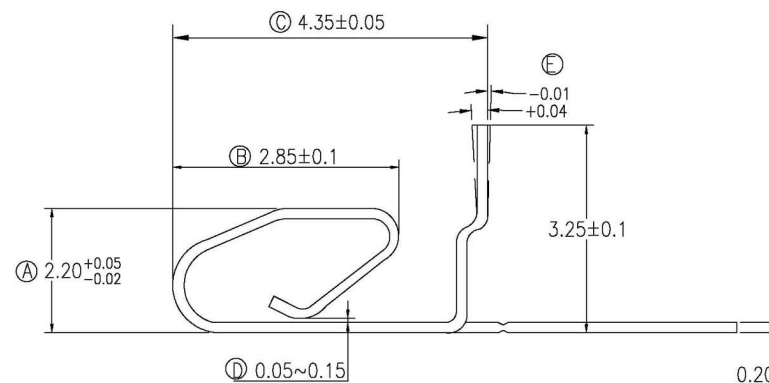

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	BETTY	SCALE 比例	PLCC SOCKET SMT TYPE 1.27mm 44P
DATE 制表日	2007/08/24	UNIT 單位	W/O POLARIZATION PEG
		PAGE 張數	PART NO.
		1 OF 1	料號 C0100-44NXXX00R
		REV. 版次	
		A	