

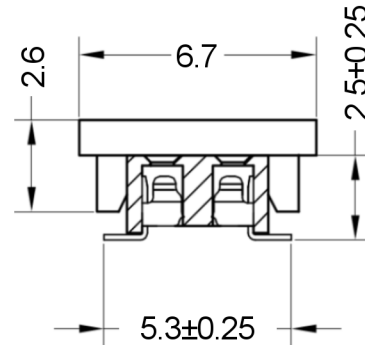
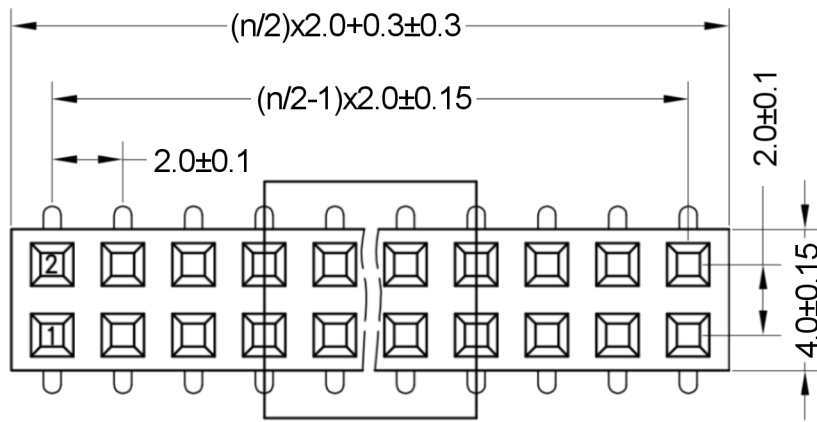


By appearing this data sheet previous are no longer valid. All dimensions and tolerances subject to change.

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. The copyright in the event of the grant of a patent or the registration of a utility model or design.

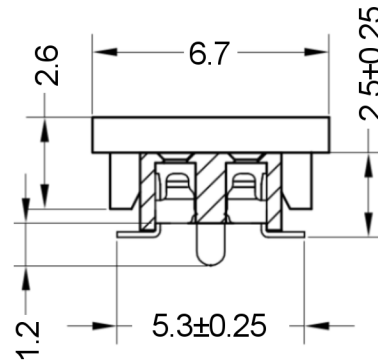

Without
Locating Pegs -00-

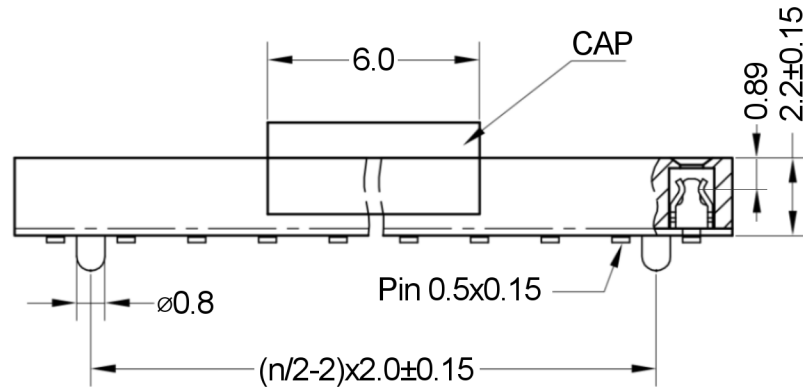


Locating Pegs -10-

SPECIFICATIONS

Rated Current:	1.5A
Contact Resistance:	20mΩ Max
Withstand Voltage:	500V AC/DC
Insulation Resistance:	1000MΩ Min
Operation Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Contact Plating:	Au Over Ni
Insulator Material:	Thermoplastic, rated UL94 V-0
Max.Processing Temp:	230°C for 30-60 seconds (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

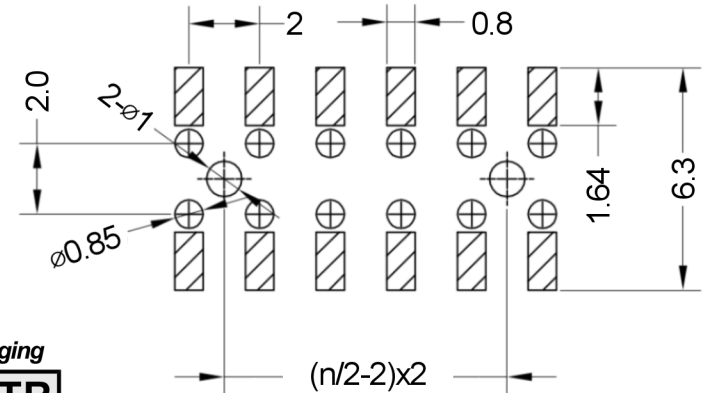

46-7459	Contacts 026 004-080 Zweireihig Double row	Plating 00 00 Vergoldet Gold plated	Locating Pegs 00 00 Ohne Pos.hilfen W/o loc. pegs 10 Mit Pos.hilfen With loc. pegs	Packaging PPTR ST PPST PPTR
----------------	---	--	---	---

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL



Serial Number 46-7459			
Part Name Female Headers, 2.00mm Pitch, Vertical, Double Row			
Creation date 2019-02-28	Drawn AL	Approved PS	Approval date 2019-02-28
REACH (EG) Nr. 1907/2006 RoHS 2011/65/EU compliant		Scale %	Sheet %