



LEDTECH ELECTRONICS CORP.

· NANYA ROAD,MUGANG ZHAOQING
· CITY GUANGDONG CHINA.

· TEL:86-758-2875541,2870651,2877464,2876185,2877017

· FAX:86-758-2878014

· [Http://www.ledtech.com.tw](http://www.ledtech.com.tw)

SPECIFICATION

PART NO. : LT641HR-H104-C17

4.8MM ROUND LED LAMP WITH HOLDER

Approved by

Checked by

Prepared by

Fang

Yang

Kssys



4.8MM ROUND LED LAMP WITH HOLDER

PART NO. : LT641HR-H104-C17

Page : 1/5


Features

- * Versatile mounting on PC board or panel.
- * Low power consumption
- * High light output
- * Free combination and easy to assembly.
- * Reliable and rugged
- * IC compatible

Description

The LED assembly is made from plastic holder and combination of lamps. It will easily mount the applicable lamps on any panel.

Package Dimensions

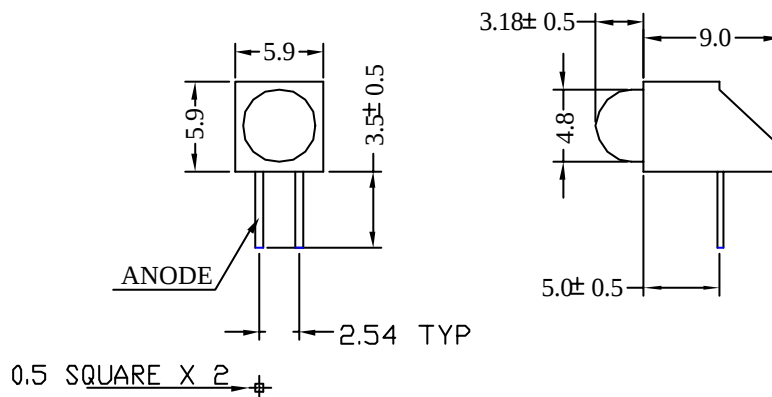

1. All dimensions are in millimeters.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT641HR-H104-C17	GaAsP/GaP	Orange	Red diffused



4.8MM ROUND LED LAMP WITH HOLDER

PART NO. : LT641HR-H104-C17

Page : 2/5

Absolute Maximum Ratings at Ta=25 :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	78	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle , 0.1 ms Pulse Width)	If(Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	
Storage Temperature Range	Tstg	-40 to +100	
Lead Soldering Temp.(1.6mm from body) for 5 seconds		260	

Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=20mA	33.0	55.0		mcd
Forward Voltage	Vf	If=20mA		2.1	2.6	V
Peak Wavelength	λP	If=20mA		635		nm
Dominant Wavelength	λD	If=20mA		626		nm
Reverse Current	Ir	Vr=5V			100	μA
Viewing Angle	2 θ 1/2	If=20mA		38		deg
Spectrum Line Halfwidth	$\Delta \lambda$	If=20mA		35		nm




4.8MM ROUND LED LAMP WITH HOLDER


PART NO. : LT641HR-H104-C17

Page : 3/5


Typical Electrical / Optical Characteristics Curves :

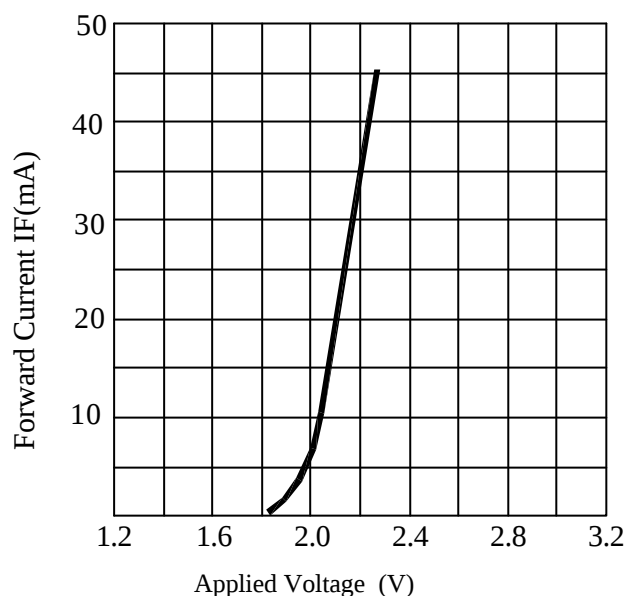


FORWARD CURRENT VS. APPLIED VOLTAGE

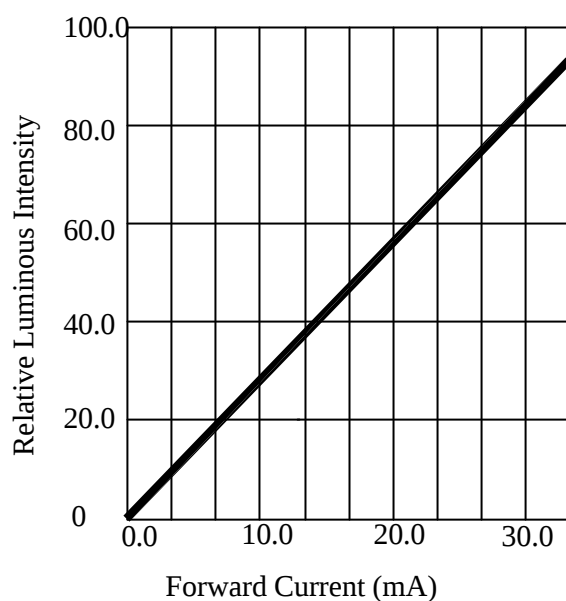

FORWARD CURRENT VS. LUMINOUS INTENSITY

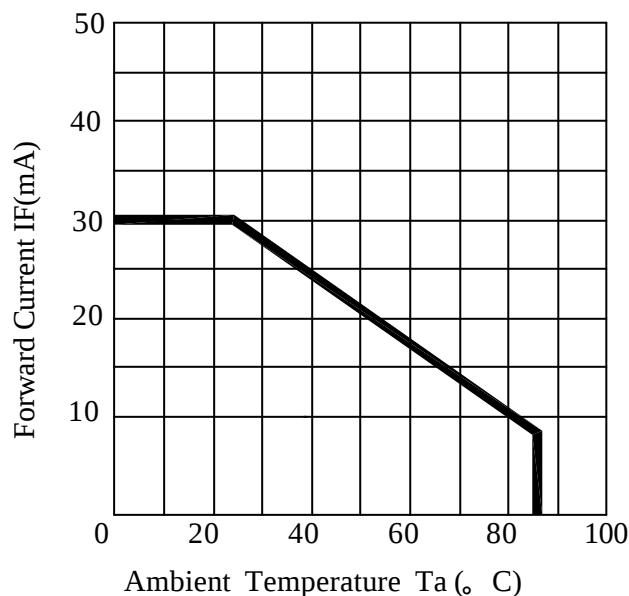

AMBIENT TEMPERATURE VS. FORWARD CURRENT

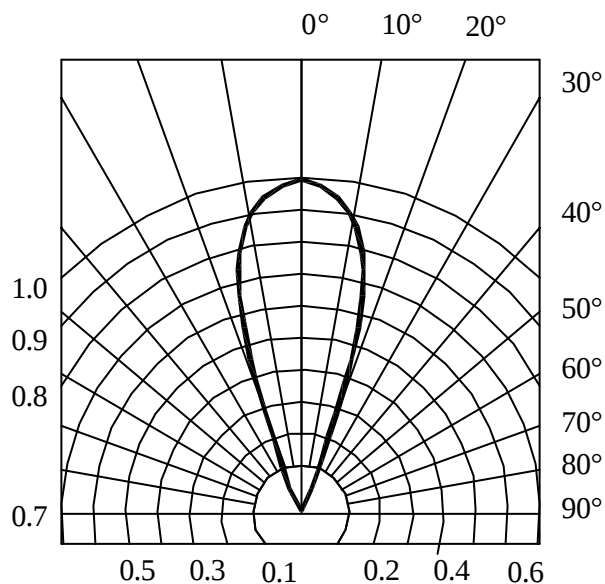

RADIATION DIAGRAM



4.8MM ROUND LED LAMP WITH HOLDER

PART NO. : LT641HR-H104-C17

Page : 4/5

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25	168hrs
Storage at High Temperature	Ta=100	168hrs
Storage at Low Temperature	Ta=-40	168hrs
Storage at High Temperature/High Humidity	Ta=85 /RH=85 %	168hrs
Operating at High Temperature	Ta=85 / If=20mA	168hrs
Operating at Low Temperature	Ta=25 / If=20mA	168hrs
Thermal Shock	Ta/T=100 /30min~ -40 /30min	10 cycles
Solderability	Tsol=230	5 sec

Criteria for Judging The Damage:

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	-----	Initial Data x1.1
Reverse Current	Ir	Vr=5V	-----	100 μ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	-----



4.8MM ROUND LAMP WITH HOLDER


PART NO. : LT631HR-H104-C17

Page : 5/5

ENCASED TYPE


PLASTIC PACKAGE
QUANTITY: 500 PCS

LEDTECH ELECTRONICS CORP.	
PART NO :LTXXXX-XX	
Q'TY	: PCS
LOT NO	:XXXXXXXXXX
DATE	:
BIN CODE:	

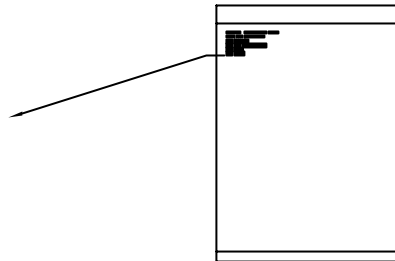

INNER BOX
QUANTITY: 10 PACKETS
TOTAL: 5,000 PCS

PART NO.	LXXXX-XX-XX				
LOT NO.	XXXXXXXXXX				
BIN CODE	Xx X	Xx X	Xx X	Xx X	TOTAL
QUANTITY	PCS	PCS	PCS	PCS	PCS
DATE	XXXX , XX , XX				

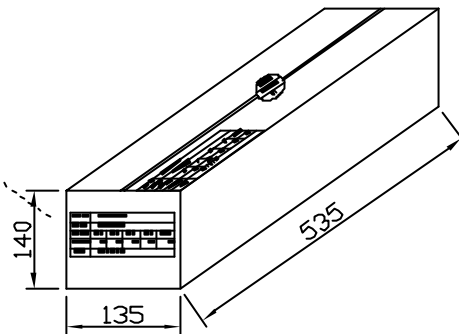

OUTER CARTON
QUANTITY: 4 BOX
TOTAL: 20,000 PCS

C/T NO. 箱 號	XX
PART NO. 料 號	LXXXX-XX-XX
QUANTITY 數 量	PCS
N.W. 淨 重	KGS
G.W. 毛 重	KGS
REMARK 備 註	

