

USB, Ausführung A, 2-Port

USB, version A, 2-Port



Isolierkörper

PBT

Kontakte

Phosphorbronze, t=0.25mm

Gehäuse

Messing t=0.3mm

Oberfläche: Vernickelt

Durchschlagsspannung

500V AC (1min)

Isolationswiderstand

1000MΩ min.

Nennspannung und Strom

1.5A bei 250V AC minimum

Insulator

PBT

Contacts

Phosphorbronze, t=0.25mm

Shell

Brass t=0.3

Finish: Nickel Plated

Withstanding voltage




500V AC (1min)

Insulation resistance

1000MΩ min.

Rated voltage and current

1.5A at 250V AC minimum

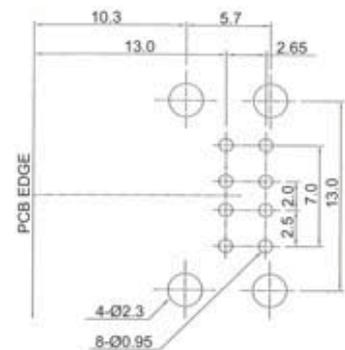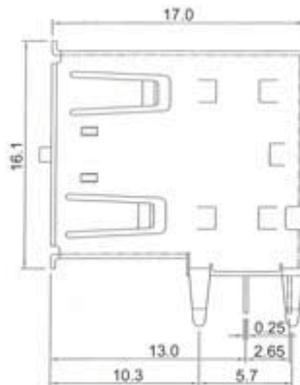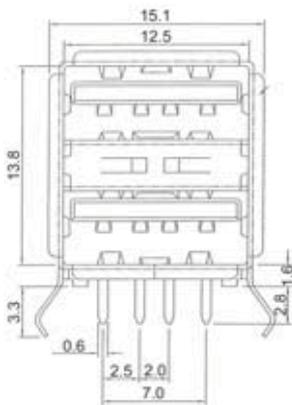

Bestellcode : **A - USB - A - 2P**
 Ordercode :

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper