




A Phoenix Mecano Company



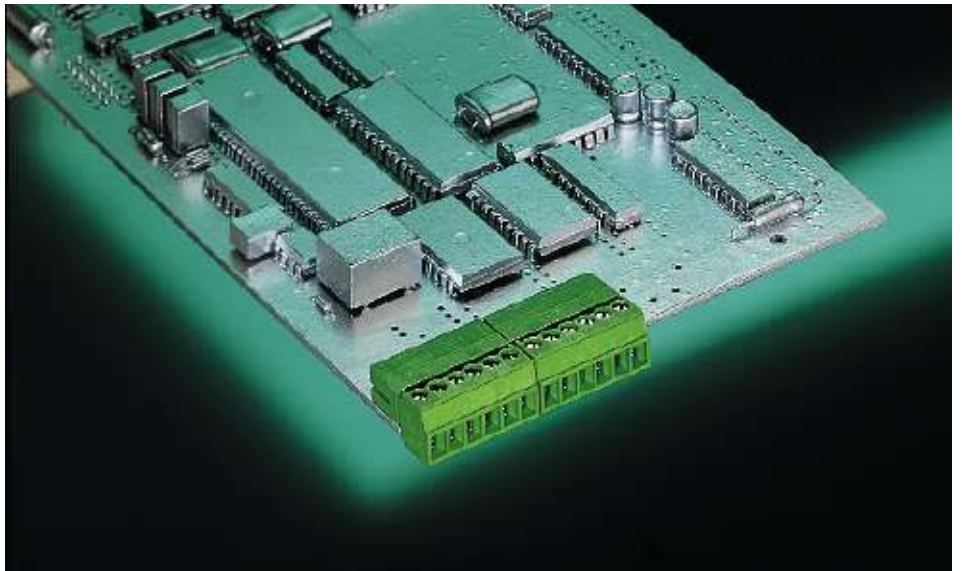

## AK(Z)1550/..-3.5(3.81)-GREEN

2-20 poles, spacing 3,5 mm und 3,81 mm

Insert required no. of poles ..

### Ratings:

		
Rated Voltage	300 V	160 V
Rated Current	5 A	9 A (T60)
Überspannungskategorie		III
Wire Size	AWG 28-16	1,5 mm <sup>2</sup>
Rating Impulse Voltage / Dirtlevel		2,5 kV / 3
Rated Torque / Screw Size		0,4 Nm / M2

### Max. Rated Cross Section

Single Wire (solid)	1,5 mm <sup>2</sup>
Stranded Wire (flexible)	1 mm <sup>2</sup>
Stranded Wire with Ferrules	1 mm <sup>2</sup>

### Dimensions

Spacing	3,5 mm (3,81 mm)
Stripped Length	7 mm

### Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/105°C
Terminal Block	CuZn
Contact	CuSn

### Colour

GREEN	RAL 6018
-------	----------

