

R5712 = Product group; Product group discount R 57 1_

AMASAN Lead-free Desoldering Copper Braid Wicks

Series: EL

Application

The braid is applied to the area that needs soldering and heated with a soldering iron. The desoldering braid then absorbs the liquid tin.

Features

- Electrolyte copper E-Cu F20 for electronic conduction purposes
- Round braid in accordance with DIN4643
- Desoldered wick made of bare copper strands braided together treated with flux
- Copper wick coated with rosin flux, durable, copper coloured, odour-free.
- Desolders components and easily removes surplus molten solder
- Excellent capillary action
- RoHS compliant

Technical Specifications

Length:1,6m
 Softening Temperature, Min.:75°C
 Flaming Point, Approx.:180°C (COC)
 Ignition Temperature:273°C (COC)

Note


Avoid inhalation of vapour when heating as this can lead to chronic respiratory disorders.
 You will find desoldering tools in this catalogue at product group T2111.

Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Armack
 www.armack.de

| Part Nr. | Part Description |
|----------|-------------------------------|
| EL050 | Desoldering Copper 0,5mm/1,6m |
| EL100 | Desoldering Copper 1,0mm/1,6m |
| EL160 | Desoldering Copper 1,5mm/1,6m |
| EL200 | Desoldering Copper 2,0mm/1,6m |
| EL300 | Desoldering Copper 2,5mm/1,6m |

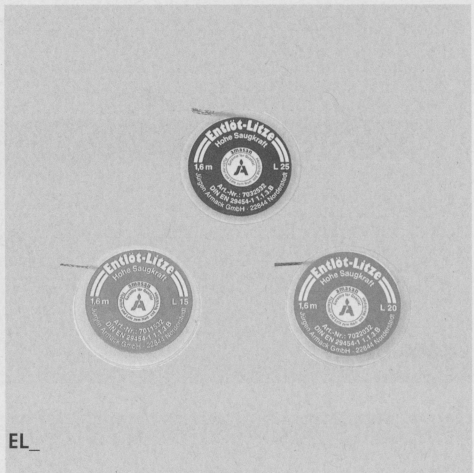

EL_