




1

2

3

4

5

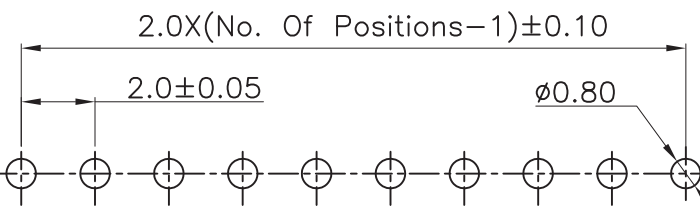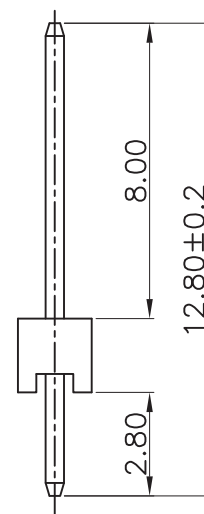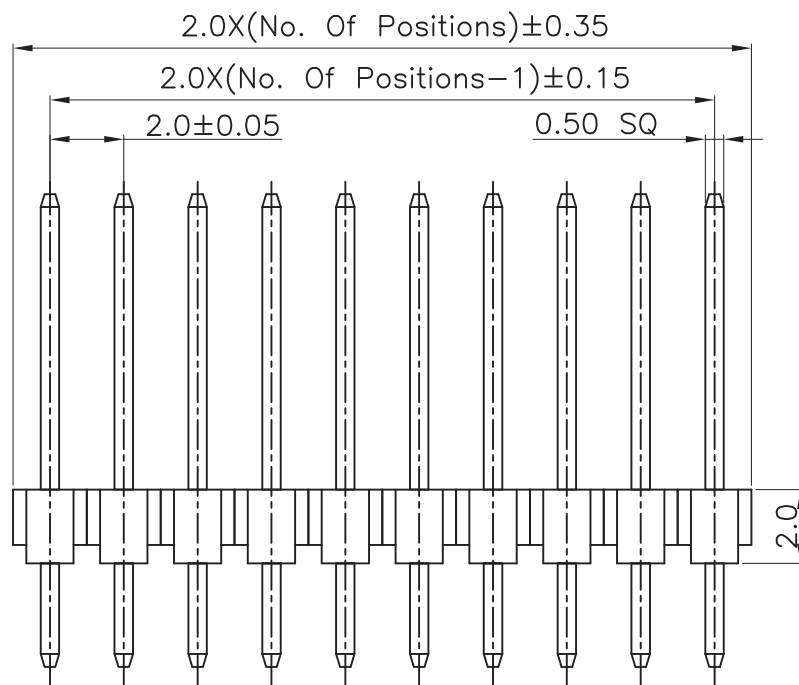

PCB Layout

RoHS Compliant

Specifications:

Current rating:2.0A AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm max.

Withstanding Voltage:500V AC/minute

Insulation resistance:1000M ohm min.

Operating Temperature Rating:-40°C ~ +105°C

Materials:

Insulator:PBT (UL94V-0)

Standard Color:Black

Contact:Copper Alloy

Plating:Gold Plated

How To Order

2210S-XXG-1280

Length
G:Gold Plated
No. Of Positions
Straight Type

F				DRAWN:	
E				Cherry Wu	
D				CHECKED:	
C				Dennis Lin	
B				APPROVAL:	
A	03-Apr-2014	(PC0001)	Cherry	Mike Wu	
REV	DATE	FILE	BY		

DRAWN:
Cherry Wu

CHECKED:
Dennis Lin

APPROVAL:
Mike Wu

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:



繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION:
2.0mm Pin Header Straight Type

PART NO:
2210S-XXG-1280

SIZE

A4

A

B

C

D