





1

2

3

4

5

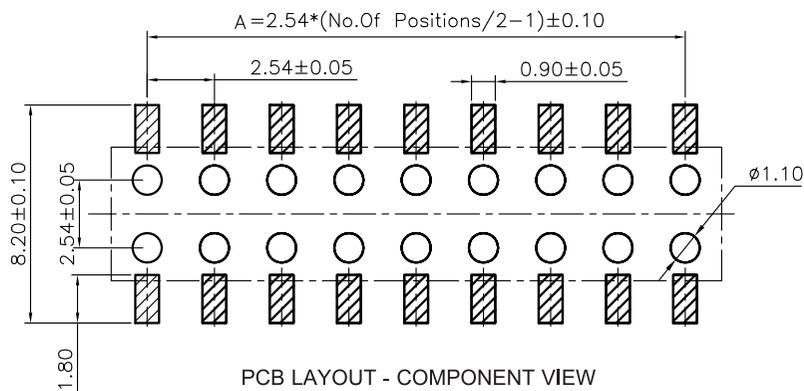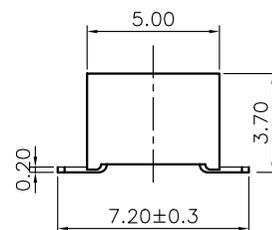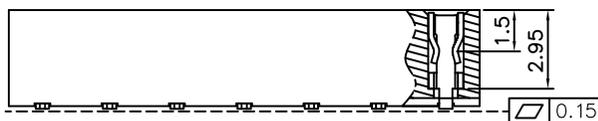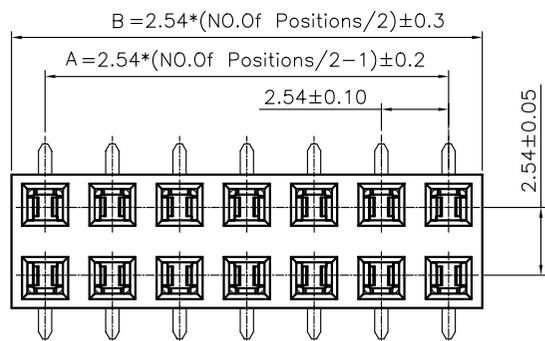

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 6T
 FLAMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER CECC 75 301-802
 PITCH: 2.54MM

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 125°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 3A
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING

JEDEC LEAD FREE REFLOW SOLDERING

PACKAGING


TRAY

DIMENSION

A = 2.54 x (NB. PIN - 1)
 B = 2.54 x (NB. POSITIONS)

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

DESCRIPTION: 2.54MM SMT DUAL SOCKET BOTTOM ENTRY

SIZE

SCALE:

WERI PART NO: 6100 xx 243 021

A4

SHEET: 1/1

DRAW: MIKE WU

G			
F			
E			
D			
C			
B	21-NOV-08	COPLANARITY	JP
A	06-NOV-08	PDF	JP
REV	DATE	FILE	BY